

Reduced installation time through offsite build

Offsite assembly is a proven method of reducing installation time and ensuring a high level of quality is achieved. Here we feature a recent example of a below ground grouped offset



fill point with four 4" Tank Fill points and a combined 3" VR1b Vapour Recovery return .


The unit was assembled using Nupi EN124 pipework along with standard fill point adapters and locking fill point caps. To further enhance the finished product it was also fitted with driver safety platforms to reduce the risk of trips and falls whilst making deliv-



eries to the site. The unit was finished at surface with lightweight D400 composite covers which are sealed to reduce water ingress into the chamber. Forecourt Solutions can provide similar pre assembled unit using alternate pipework systems or with above ground filling points should your site configuration allow. We have our own in house fabrication capability which ensures that your ideas become a reality quickly and within budget.

If you have such a project please contact our technical support team who will be happy to work with you to make your ideas into a reality.

Alternatively please visit our website www.forecourtsolutionsltd.com where you will find information on the extensive product range that we have available. Tel 01278428833

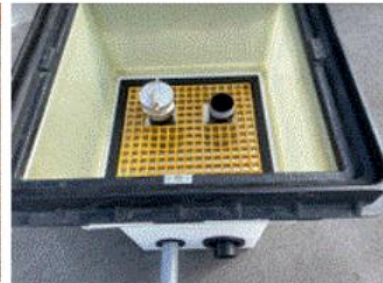

Forecourt Solutions Ltd

Unit 3, Summerfield Way, Chelston Business Park
Wellington, Somerset, TA21 9JE. UK

W: ForecourtSolutionsLtd.com

