


FLEXO **SPRINGS**

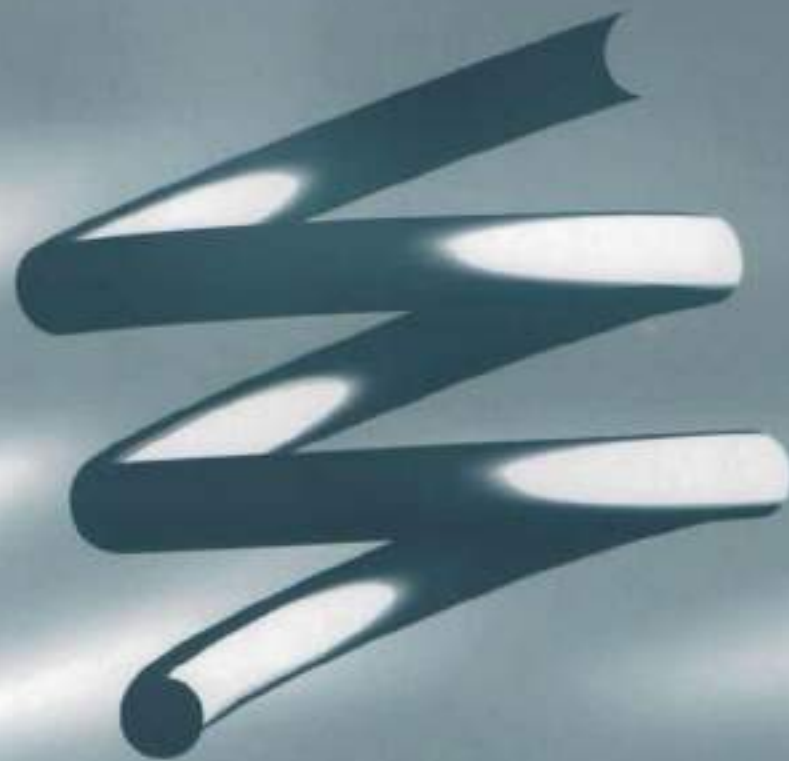

**The User Friendly
Catalogue for
Buyers and Engineers**

FLEXO

SPRINGS

our company

As a manufacturer and stockist, we are one of the most competitively priced suppliers of springs in the UK and have supplied leading companies in a wide range of industries for over 70 years.

free design assistance

There is an optimum design for a spring according to its application. This service can be used to create new designs or check existing ones in order to meet specific requirements.

quality systems

We are committed to quality and operate strict quality systems in order to ensure that we maintain our high standards.

springs to order

We are always happy to supply springs to a customer's specification. This may be where a specific design, material, finish or tolerance are required.

useful options

In addition to manufacturing to customers own specifications, our 'Rolling Stock', 'Schedule' and 'Free Stocking' facilities allow customers to achieve significant improvements in stock management and control, providing greater operational efficiency and productivity, reducing lead times and offering protection against unplanned downtime.



Flexo springs limited are a long established ISO 9002 spring company specialising in small to medium runs from 1 off to 100,000s off.

The various industries we supply range from: -

Aerospace
Medical Industry
Motor Sport
Nuclear
Defence
General Engineering Industry
Civil Engineering
Specialist Marine applications
Electrical Components Industry
Motor Restoration

We have found our niche in delivering quality goods within a short delivery time.
We stock over 8,000 different springs with a same day despatch.

We also make bespoke springs in all types of wire size and dimensions, these can usually be manufactured and despatched within two to three weeks, dependent on material availability.

Compression Springs

0.19mm up to and including 30mm round wire

Extensions springs

0.19mm up to and including 30mm round wire.

Torsions Springs

Wire size 0.19mm up to and including 25.4mm round wire.

We can also supply all standards of Die Springs as well as clips, fasteners, Belleville washers/ disc springs.

If in doubt about what we can manufacture or supply please give our sales team a call they will always be happy to assist you.

All our goods comply with the RoHS and WEEE Directive.



FLEXO SPRINGS LTD

Hill Street

Kingswood

Bristol BS15 4HB

Tel 0117 967 3313

Fax 0117 935 2597

www.flexosprings.com - sales@flexosprings.com

The user friendly catalogue for buyers and engineers

contents

General Specifications	page 2
Compression Springs	page 3 - 70
Extension Springs	page 71 - 86
Compression Lengths	page 87 - 89
Tension Lengths	page 90 - 91
Boxes of Springs	page 92
Conversion Tables	page 93

If you are unable to locate a suitable spring from this stock spring catalogue, you can choose from millions of springs that have been pre-designed and can be viewed on our website.

www.flexosprings.com

For Sales or Assistance


Tel - (0117) 967 3313

Fax - (0117) 935 2597


sales@flexosprings.com

General Specifications

COMPRESSION SPRINGS

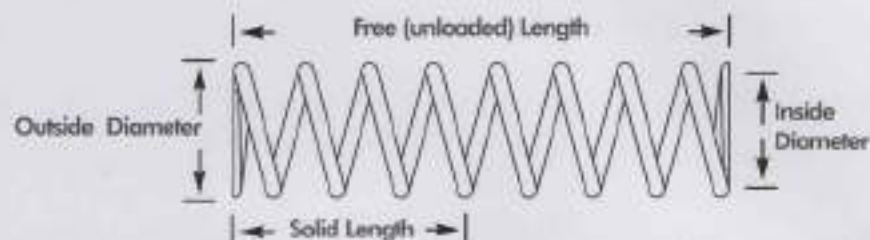

EXTENSION SPRINGS

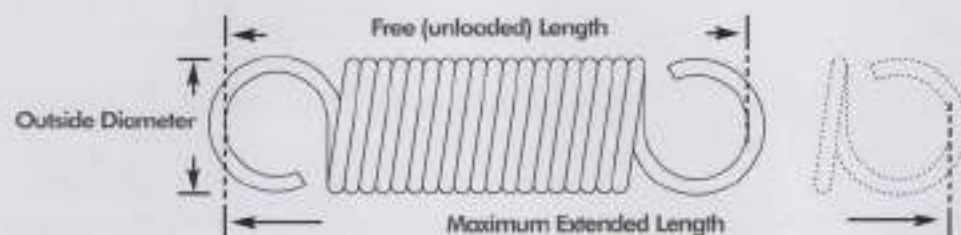


	COMPRESSION SPRINGS	EXTENSION SPRINGS
Characteristics	A spring will compress when a load is applied. The amount of deflection will be determined by the spring rate. It is not advisable to use more than 80% of the maximum possible deflection.	An initial load must be applied before the coils will begin to open. The amount of deflection thereafter is determined by the spring rate. We recommend a safe extended length within the catalogue.
End Coils	Up to 0.5mm wire - closed only. Over 0.5mm wire - closed and ground.	Full loops are of a similar size to the outside diameter. End positions of loops may vary.
Tolerances	British Standard BS 1726: Part 1: Grade 2	British Standard BS 1726: Part 2: Grade 2
Materials	Carbon Steel Wire / Music Wire British Standard BS 5216, Grade ND3 / Grade M4	
Finish	To enhance performance, springs are stress relieved at appropriate temperatures, and are supplied lightly oiled.	



Compression Springs

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	Lbs/in	approx	
A3-1515-2M	A 3	2.4	1.8	6.4	0.32	2.9	1.71	0.094	0.070	0.250	0.012	0.115	9.8	8.3	A
A3-1915-2M	A 3	2.4	1.8	8.0	0.32	3.5	1.31	0.094	0.070	0.315	0.012	0.139	7.5	10.2	A
A3-2215-2M	A 3	2.4	1.8	9.5	0.32	4.1	1.08	0.094	0.070	0.375	0.012	0.161	6.2	12.0	A
A3-2715-2M	A 3	2.4	1.8	12.7	0.32	5.3	0.79	0.094	0.070	0.500	0.012	0.207	4.5	15.7	A
A3-3615-2M	A 3	2.4	1.8	19.1	0.32	7.6	0.51	0.094	0.070	0.750	0.012	0.298	2.9	23.1	A
A4-1515-2M	A 4	2.7	2.1	6.4	0.32	2.6	1.38	0.106	0.081	0.250	0.012	0.102	7.9	7.2	A
042102	A 4	2.7	2.0	6.4	0.35	2.8	2.15	0.106	0.079	0.250	0.014	0.109	12.3	7.0	A
042202	A 4	2.7	1.9	6.4	0.38	3.2	2.82	0.106	0.077	0.250	0.015	0.127	16.1	7.6	A
A4-1521-2M	A 4	2.7	1.9	6.4	0.42	3.7	4.26	0.106	0.073	0.250	0.016	0.146	24.3	7.9	A
A4-1915-2M	A 4	2.7	2.1	8.0	0.32	3.1	1.07	0.106	0.081	0.315	0.012	0.121	6.1	8.7	A
A4-1917-2M	A 4	2.7	2.0	8.0	0.35	3.5	1.51	0.106	0.079	0.315	0.014	0.137	8.6	9.1	A
A4-1919-2M	A 4	2.7	1.9	8.0	0.38	3.9	2.12	0.106	0.077	0.315	0.015	0.155	12.1	9.5	A
A4-1921-2M	A 4	2.7	1.9	8.0	0.42	4.5	3.22	0.106	0.073	0.315	0.016	0.178	18.4	9.8	A
A4-2215-2M	A 4	2.7	2.1	9.5	0.32	3.5	0.88	0.106	0.081	0.375	0.012	0.139	5.0	10.2	A
042103	A 4	2.7	2.0	9.5	0.35	3.7	1.38	0.106	0.079	0.375	0.014	0.147	7.9	9.8	A
042203	A 4	2.7	1.9	9.5	0.38	4.4	1.84	0.106	0.077	0.375	0.015	0.172	10.5	10.6	A
A4-2221-2M	A 4	2.7	1.9	9.5	0.42	5.3	2.63	0.106	0.073	0.375	0.016	0.207	15.0	11.6	A
A4-2715-2M	A 4	2.7	2.1	12.7	0.32	4.5	0.64	0.106	0.081	0.500	0.012	0.176	3.7	13.2	A
042104	A 4	2.7	2.0	12.7	0.35	4.6	1.04	0.106	0.079	0.500	0.014	0.181	6.0	12.3	A
042204	A 4	2.7	1.9	12.7	0.38	5.4	1.38	0.106	0.077	0.500	0.015	0.213	7.9	13.4	A
A4-2721-2M	A 4	2.7	1.9	12.7	0.42	6.8	1.90	0.106	0.073	0.500	0.016	0.267	10.8	15.3	A
042105	A 4	2.7	2.0	15.9	0.35	5.5	0.83	0.106	0.079	0.625	0.014	0.217	4.7	15.0	A
042205	A 4	2.7	1.9	15.9	0.38	6.5	1.11	0.106	0.077	0.625	0.015	0.255	6.3	16.2	A
A4-3615-2M	A 4	2.7	2.1	19.1	0.32	6.4	0.42	0.106	0.081	0.750	0.012	0.252	2.4	19.3	A
042106	A 4	2.7	2.0	19.1	0.35	6.4	0.69	0.106	0.079	0.750	0.014	0.251	4.0	17.5	A
042206	A 4	2.7	1.9	19.1	0.38	7.4	0.94	0.106	0.077	0.750	0.015	0.293	5.4	18.8	A
A4-3621-2M	A 4	2.7	1.9	19.1	0.42	9.9	1.22	0.106	0.073	0.750	0.016	0.388	7.0	22.6	A
042107	A 4	2.7	2.0	22.2	0.35	7.2	0.60	0.106	0.079	0.875	0.014	0.285	3.4	20.0	A
042207	A 4	2.7	1.9	22.2	0.38	8.8	0.77	0.106	0.077	0.875	0.015	0.348	4.4	22.5	A
042108	A 4	2.7	2.0	25.4	0.35	8.1	0.52	0.106	0.079	1.000	0.014	0.319	3.0	22.5	A
042208	A 4	2.7	1.9	25.4	0.38	9.8	0.68	0.106	0.077	1.000	0.015	0.386	3.9	25.1	A
042110	A 4	2.7	2.0	31.8	0.35	10.0	0.42	0.106	0.079	1.250	0.014	0.393	2.4	27.9	B
042210	A 4	2.7	1.9	31.8	0.38	12.2	0.54	0.106	0.077	1.250	0.015	0.481	3.1	31.5	B
A5-1515-2M	A 5	3.1	2.5	6.4	0.32	2.2	1.12	0.122	0.097	0.250	0.012	0.087	6.4	6.0	A
A5-1517-2M	A 5	3.1	2.4	6.4	0.35	2.5	1.56	0.122	0.095	0.250	0.014	0.099	8.9	6.3	A
A5-1519-2M	A 5	3.1	2.3	6.4	0.38	2.8	2.16	0.122	0.092	0.250	0.015	0.112	12.3	6.5	A
A5-1521-2M	A 5	3.1	2.3	6.4	0.42	3.3	3.22	0.122	0.089	0.250	0.016	0.128	18.4	6.8	A
A5-1524-2M	A 5	3.1	2.2	6.4	0.46	3.6	4.73	0.122	0.086	0.250	0.018	0.143	27.0	7.0	A
A5-1527-2M	A 5	3.1	2.1	6.4	0.51	3.8	6.82	0.122	0.082	0.250	0.020	0.151	38.9	7.6	B
A5-1915-2M	A 5	3.1	2.5	8.0	0.32	2.6	0.86	0.122	0.097	0.315	0.012	0.103	4.9	7.3	A
A5-1917-2M	A 5	3.1	2.4	8.0	0.35	3.0	1.19	0.122	0.095	0.315	0.014	0.117	6.8	7.6	A
A5-1919-2M	A 5	3.1	2.3	8.0	0.38	3.4	1.64	0.122	0.092	0.315	0.015	0.133	9.4	8.0	A
A5-1921-2M	A 5	3.1	2.3	8.0	0.42	3.9	2.43	0.122	0.089	0.315	0.016	0.154	13.9	8.4	A
A5-1924-2M	A 5	3.1	2.2	8.0	0.46	4.4	3.55	0.122	0.086	0.315	0.018	0.173	20.3	8.6	A
A5-1927-2M	A 5	3.1	2.1	8.0	0.51	4.7	5.21	0.122	0.082	0.315	0.020	0.186	29.7	9.3	B
A5-2215-2M	A 5	3.1	2.5	9.5	0.32	3.0	0.70	0.122	0.097	0.375	0.012	0.117	4.0	8.4	A
A5-2217-2M	A 5	3.1	2.4	9.5	0.35	3.4	0.98	0.122	0.095	0.375	0.014	0.134	5.6	8.9	A
A5-2219-2M	A 5	3.1	2.3	9.5	0.38	3.9	1.34	0.122	0.092	0.375	0.015	0.153	7.7	9.3	A
A5-2221-2M	A 5	3.1	2.3	9.5	0.42	4.5	1.98	0.122	0.089	0.375	0.016	0.178	11.3	9.8	A
A5-2224-2M	A 5	3.1	2.2	9.5	0.46	5.1	2.89	0.122	0.086	0.375	0.018	0.200	16.5	10.1	A
A5-2227-2M	A 5	3.1	2.1	9.5	0.51	5.5	4.27	0.122	0.082	0.375	0.020	0.217	24.4	10.9	B

Choose from millions of sizes - www.flexosprings.com

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	Lbs/in	approx	
M063302	A 5	3.0	2.4	10.0	0.32	3.7	0.58	0.118	0.093	0.394	0.012	0.146	3.3	10.8	A
A5-2315-2M	A 5	3.0	2.4	10.0	0.32	3.2	0.70	0.118	0.093	0.394	0.012	0.126	4.0	9.2	A
M063502	A 5	3.0	2.3	10.0	0.35	3.7	0.96	0.118	0.091	0.394	0.014	0.147	5.5	9.8	A
M063602	A 5	3.0	2.2	10.0	0.38	4.7	1.15	0.118	0.089	0.394	0.015	0.185	6.6	11.5	A
A5-2715-2M	A 5	3.1	2.5	12.7	0.32	3.7	0.51	0.122	0.097	0.500	0.012	0.146	2.9	10.8	A
A5-2717-2M	A 5	3.1	2.4	12.7	0.35	4.3	0.71	0.122	0.095	0.500	0.014	0.169	4.1	11.4	A
A5-2719-2M	A 5	3.1	2.3	12.7	0.38	4.9	0.97	0.122	0.092	0.500	0.015	0.193	5.6	12.1	A
A5-2721-2M	A 5	3.1	2.3	12.7	0.42	5.8	1.43	0.122	0.089	0.500	0.016	0.227	8.2	12.8	A
A5-2724-2M	A 5	3.1	2.2	12.7	0.46	6.5	2.08	0.122	0.086	0.500	0.018	0.257	11.9	13.3	A
A5-2727-2M	A 5	3.1	2.1	12.7	0.51	7.2	3.11	0.122	0.082	0.500	0.020	0.284	17.8	14.2	C
M063303	A 5	3.0	2.4	15.0	0.32	5.1	0.38	0.118	0.093	0.591	0.012	0.202	2.2	15.3	A
A5-3015-2M	A 5	3.0	2.4	15.0	0.32	4.4	0.45	0.118	0.093	0.591	0.012	0.173	2.6	13.1	A
M063503	A 5	3.0	2.3	15.0	0.35	5.2	0.62	0.118	0.091	0.591	0.014	0.205	3.5	14.1	A
M063603	A 5	3.0	2.2	15.0	0.38	6.8	0.73	0.118	0.089	0.591	0.015	0.266	4.2	17.0	A
A5-3115-2M	A 5	3.1	2.5	15.9	0.32	4.5	0.40	0.122	0.097	0.625	0.012	0.176	2.3	13.2	A
A5-3117-2M	A 5	3.1	2.4	15.9	0.35	5.2	0.56	0.122	0.095	0.625	0.014	0.204	3.2	14.0	A
A5-3119-2M	A 5	3.1	2.3	15.9	0.38	5.9	0.76	0.122	0.092	0.625	0.015	0.234	4.4	14.8	A
A5-3121-2M	A 5	3.1	2.3	15.9	0.42	7.0	1.12	0.122	0.089	0.625	0.016	0.276	6.4	15.8	A
A5-3124-2M	A 5	3.1	2.2	15.9	0.46	8.0	1.62	0.122	0.086	0.625	0.018	0.314	9.3	16.4	A
A5-3127-2M	A 5	3.1	2.1	15.9	0.51	8.9	2.45	0.122	0.082	0.625	0.020	0.350	14.0	17.5	C
A5-3415-2M	A 5	3.1	2.5	17.5	0.32	4.8	0.37	0.122	0.097	0.689	0.012	0.191	2.1	14.4	A
A5-3417-2M	A 5	3.1	2.4	17.5	0.35	5.6	0.50	0.122	0.095	0.689	0.014	0.221	2.9	15.3	A
A5-3419-2M	A 5	3.1	2.3	17.5	0.38	6.5	0.69	0.122	0.092	0.689	0.015	0.255	3.9	16.2	A
A5-3421-2M	A 5	3.1	2.3	17.5	0.42	7.7	1.01	0.122	0.089	0.689	0.016	0.302	5.8	17.4	A
A5-3424-2M	A 5	3.1	2.2	17.5	0.46	8.7	1.46	0.122	0.086	0.689	0.018	0.343	8.3	18.0	A
A5-3427-2M	A 5	3.1	2.1	17.5	0.51	9.7	2.21	0.122	0.082	0.689	0.020	0.384	12.6	19.2	C
A5-3615-2M	A 5	3.1	2.5	19.1	0.32	5.2	0.33	0.122	0.097	0.750	0.012	0.205	1.9	15.5	A
A5-3617-2M	A 5	3.1	2.4	19.1	0.35	6.1	0.46	0.122	0.095	0.750	0.014	0.238	2.6	16.6	A
A5-3619-2M	A 5	3.1	2.3	19.1	0.38	7.0	0.63	0.122	0.092	0.750	0.015	0.275	3.6	17.6	A
A5-3621-2M	A 5	3.1	2.3	19.1	0.42	8.3	0.92	0.122	0.089	0.750	0.016	0.326	5.3	18.8	A
A5-3624-2M	A 5	3.1	2.2	19.1	0.46	9.4	1.33	0.122	0.086	0.750	0.018	0.370	7.6	19.6	A
A5-3627-2M	A 5	3.1	2.1	19.1	0.51	10.6	2.02	0.122	0.082	0.750	0.020	0.416	11.5	20.8	C
M063304	A 5	3.0	2.4	20.0	0.32	6.6	0.28	0.118	0.093	0.787	0.012	0.260	1.6	20.0	A
A5-3715-2M	A 5	3.0	2.4	20.0	0.32	5.7	0.33	0.118	0.093	0.787	0.012	0.224	1.9	17.1	A
M063504	A 5	3.0	2.3	20.0	0.35	6.7	0.46	0.118	0.091	0.787	0.014	0.264	2.6	18.4	A
M063604	A 5	3.0	2.2	20.0	0.38	8.8	0.53	0.118	0.089	0.787	0.015	0.348	3.1	22.5	A
M063305	A 5	3.0	2.4	25.0	0.32	8.0	0.22	0.118	0.093	0.984	0.012	0.316	1.3	24.5	A
M063505	A 5	3.0	2.3	25.0	0.35	8.2	0.36	0.118	0.091	0.984	0.014	0.322	2.1	22.7	A
M063605	A 5	3.0	2.2	25.0	0.38	10.8	0.43	0.118	0.089	0.984	0.015	0.426	2.4	27.8	A
M063306	A 5	3.0	2.4	30.0	0.32	9.5	0.19	0.118	0.093	1.181	0.012	0.372	1.1	29.0	B
M063506	A 5	3.0	2.3	30.0	0.35	9.7	0.30	0.118	0.091	1.181	0.014	0.382	1.7	27.1	B
M063606	A 5	3.0	2.2	30.0	0.38	12.9	0.35	0.118	0.089	1.181	0.015	0.507	2.0	33.3	B
A7-1515-2M	A 7	3.6	3.0	6.4	0.32	1.9	0.90	0.142	0.117	0.250	0.012	0.075	5.2	5.1	A
A7-1517-2M	A 7	3.6	2.9	6.4	0.35	2.2	1.24	0.142	0.115	0.250	0.014	0.085	7.1	5.3	A
052202	A 7	3.6	2.8	6.4	0.38	2.4	1.69	0.142	0.112	0.250	0.015	0.096	9.6	5.5	A
052302	A 7	3.6	2.8	6.4	0.42	2.8	2.48	0.142	0.109	0.250	0.016	0.111	14.2	5.8	A
052402	A 7	3.6	2.7	6.4	0.46	3.2	3.57	0.142	0.106	0.250	0.018	0.124	20.4	5.9	A
A7-1527-2M	A 7	3.6	2.6	6.4	0.51	3.3	4.94	0.142	0.102	0.250	0.020	0.130	28.2	6.5	B
A7-1529-2M	A 7	3.6	2.5	6.4	0.56	3.7	7.39	0.142	0.098	0.250	0.022	0.146	42.2	6.7	C
A7-1915-2M	A 7	3.6	3.0	8.0	0.32	2.2	0.69	0.142	0.117	0.315	0.012	0.087	3.9	6.0	A
A7-1917-2M	A 7	3.6	2.9	8.0	0.35	2.5	0.95	0.142	0.115	0.315	0.014	0.099	5.4	6.3	A

For Sales or Assistance - Tel 0117 967 3313

All characteristics are nominal

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	lbs/in	approx	
A7-1919-2M	A7	3.6	2.8	8.0	0.38	2.9	1.28	0.142	0.112	0.315	0.015	0.113	7.3	6.6	A
A7-1921-2M	A7	3.6	2.8	8.0	0.42	3.3	1.86	0.142	0.109	0.315	0.016	0.131	10.6	7.0	A
A7-1924-2M	A7	3.6	2.7	8.0	0.46	3.8	2.65	0.142	0.106	0.315	0.018	0.148	15.1	7.3	A
A7-1927-2M	A7	3.6	2.6	8.0	0.51	4.0	3.77	0.142	0.102	0.315	0.020	0.158	21.5	7.9	B
A7-1929-2M	A7	3.6	2.5	8.0	0.56	4.5	5.62	0.142	0.098	0.315	0.022	0.179	32.1	8.1	C
A7-2215-2M	A7	3.6	3.0	9.5	0.32	2.5	0.57	0.142	0.117	0.375	0.012	0.097	3.2	6.8	A
A7-2217-2M	A7	3.6	2.9	9.5	0.35	2.8	0.78	0.142	0.115	0.375	0.014	0.112	4.4	7.2	A
052203	A7	3.6	2.8	9.5	0.38	3.2	1.07	0.142	0.112	0.375	0.015	0.126	6.1	7.5	A
052303	A7	3.6	2.8	9.5	0.42	3.6	1.62	0.142	0.109	0.375	0.016	0.144	9.2	7.8	A
052403	A7	3.6	2.7	9.5	0.46	4.3	2.21	0.142	0.106	0.375	0.018	0.167	12.6	8.3	A
A7-2227-2M	A7	3.6	2.6	9.5	0.51	4.7	3.09	0.142	0.102	0.375	0.020	0.184	17.7	9.2	B
A7-2229-2M	A7	3.6	2.5	9.5	0.56	5.3	4.60	0.142	0.098	0.375	0.022	0.209	26.3	9.5	C
A7-2317-2M	A7	3.5	2.8	10.0	0.35	3.0	0.77	0.138	0.111	0.394	0.014	0.120	4.4	7.8	A
M073602	A7	3.5	2.7	10.0	0.38	3.9	0.90	0.138	0.108	0.394	0.015	0.152	5.1	9.3	A
M073702	A7	3.5	2.7	10.0	0.40	4.2	1.14	0.138	0.106	0.394	0.016	0.165	6.5	9.5	A
M073802	A7	3.5	2.7	10.0	0.42	4.1	1.50	0.138	0.105	0.394	0.016	0.161	8.6	8.8	A
M073902	A7	3.5	2.6	10.0	0.46	5.0	1.92	0.138	0.102	0.394	0.018	0.198	11.0	10.0	A
A7-2715-2M	A7	3.6	3.0	12.7	0.32	3.0	0.41	0.142	0.117	0.500	0.012	0.120	2.4	8.6	A
A7-2717-2M	A7	3.6	2.9	12.7	0.35	3.5	0.57	0.142	0.115	0.500	0.014	0.138	3.2	9.2	A
052204	A7	3.6	2.8	12.7	0.38	3.9	0.82	0.142	0.112	0.500	0.015	0.152	4.7	9.3	A
052304	A7	3.6	2.8	12.7	0.42	4.4	1.24	0.142	0.109	0.500	0.016	0.172	7.1	9.5	A
052404	A7	3.6	2.7	12.7	0.46	5.2	1.66	0.142	0.106	0.500	0.018	0.205	9.5	10.4	A
A7-2727-2M	A7	3.6	2.6	12.7	0.51	6.0	2.25	0.142	0.102	0.500	0.020	0.238	12.9	11.9	C
A7-2729-2M	A7	3.6	2.5	12.7	0.56	6.9	3.34	0.142	0.098	0.500	0.022	0.271	19.1	12.3	C
A7-3017-2M	A7	3.5	2.8	15.0	0.35	4.2	0.49	0.138	0.111	0.591	0.014	0.164	2.8	11.1	A
M073603	A7	3.5	2.7	15.0	0.38	5.5	0.57	0.138	0.108	0.591	0.015	0.215	3.2	13.5	A
M073703	A7	3.5	2.7	15.0	0.40	6.0	0.71	0.138	0.106	0.591	0.016	0.236	4.1	14.0	A
M073803	A7	3.5	2.7	15.0	0.42	5.8	0.95	0.138	0.105	0.591	0.016	0.227	5.4	12.8	A
M073903	A7	3.5	2.6	15.0	0.46	7.2	1.20	0.138	0.102	0.591	0.018	0.283	6.9	14.8	A
A7-3115-2M	A7	3.6	3.0	15.9	0.32	3.6	0.33	0.142	0.117	0.625	0.012	0.142	1.9	10.4	A
A7-3117-2M	A7	3.6	2.9	15.9	0.35	4.2	0.45	0.142	0.115	0.625	0.014	0.165	2.5	11.1	A
052205	A7	3.6	2.8	15.9	0.38	4.6	0.64	0.142	0.112	0.625	0.015	0.181	3.6	11.3	A
052305	A7	3.6	2.8	15.9	0.42	5.2	0.98	0.142	0.109	0.625	0.016	0.205	5.6	11.5	A
052405	A7	3.6	2.7	15.9	0.46	6.3	1.29	0.142	0.106	0.625	0.018	0.248	7.4	12.8	A
A7-3127-2M	A7	3.6	2.6	15.9	0.51	7.4	1.77	0.142	0.102	0.625	0.020	0.292	10.1	14.6	C
A7-3129-2M	A7	3.6	2.5	15.9	0.56	8.5	2.62	0.142	0.098	0.625	0.022	0.333	15.0	15.1	C
A7-3415-2M	A7	3.6	3.0	17.5	0.32	3.9	0.29	0.142	0.117	0.689	0.012	0.153	1.7	11.3	A
A7-3417-2M	A7	3.6	2.9	17.5	0.35	4.5	0.40	0.142	0.115	0.689	0.014	0.179	2.3	12.1	A
A7-3419-2M	A7	3.6	2.8	17.5	0.38	5.3	0.54	0.142	0.112	0.689	0.015	0.207	3.1	13.0	A
A7-3421-2M	A7	3.6	2.8	17.5	0.42	6.3	0.77	0.142	0.109	0.689	0.016	0.247	4.4	14.1	A
A7-3424-2M	A7	3.6	2.7	17.5	0.46	7.2	1.09	0.142	0.106	0.689	0.018	0.284	6.2	14.8	A
A7-3427-2M	A7	3.6	2.6	17.5	0.51	8.1	1.60	0.142	0.102	0.689	0.020	0.319	9.1	16.0	C
A7-3429-2M	A7	3.6	2.5	17.5	0.56	9.3	2.36	0.142	0.098	0.689	0.022	0.365	13.5	16.6	C
A7-3615-2M	A7	3.6	3.0	19.1	0.32	4.2	0.27	0.142	0.117	0.750	0.012	0.164	1.5	12.2	A
A7-3617-2M	A7	3.6	2.9	19.1	0.35	4.9	0.37	0.142	0.115	0.750	0.014	0.192	2.1	13.1	A
052206	A7	3.6	2.8	19.1	0.38	5.3	0.54	0.142	0.112	0.750	0.015	0.207	3.1	13.0	A
052306	A7	3.6	2.8	19.1	0.42	6.0	0.81	0.142	0.109	0.750	0.016	0.238	4.6	13.5	A
052406	A7	3.6	2.7	19.1	0.46	7.3	1.07	0.142	0.106	0.750	0.018	0.288	6.1	15.0	A
A7-3627-2M	A7	3.6	2.6	19.1	0.51	8.8	1.46	0.142	0.102	0.750	0.020	0.346	8.3	17.3	C
A7-3629-2M	A7	3.6	2.5	19.1	0.56	10.0	2.16	0.142	0.098	0.750	0.022	0.395	12.3	18.0	C
A7-3717-2M	A7	3.5	2.8	20.0	0.35	5.3	0.36	0.138	0.111	0.787	0.014	0.208	2.1	14.3	A

Choose from millions of sizes - www.flexosprings.com

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	Lbs/in	approx	
M073604	A 7	3.5	2.7	20.0	0.38	7.1	0.41	0.138	0.108	0.787	0.015	0.278	2.4	17.8	A
M073704	A 7	3.5	2.7	20.0	0.40	7.7	0.52	0.138	0.106	0.787	0.016	0.303	3.0	18.3	A
M073804	A 7	3.5	2.7	20.0	0.42	7.3	0.70	0.138	0.105	0.787	0.016	0.289	4.0	16.6	A
M073904	A 7	3.5	2.6	20.0	0.46	9.4	0.88	0.138	0.102	0.787	0.018	0.369	5.0	19.5	A
052207	A 7	3.6	2.8	22.2	0.38	6.0	0.45	0.142	0.112	0.875	0.015	0.237	2.6	15.0	A
052307	A 7	3.6	2.8	22.2	0.42	6.9	0.69	0.142	0.109	0.875	0.016	0.271	3.9	15.5	A
052407	A 7	3.6	2.7	22.2	0.46	8.2	0.93	0.142	0.106	0.875	0.018	0.324	5.3	17.0	A
M073605	A 7	3.5	2.7	25.0	0.38	8.6	0.32	0.138	0.108	0.984	0.015	0.340	1.9	22.0	A
M073705	A 7	3.5	2.7	25.0	0.40	9.5	0.41	0.138	0.106	0.984	0.016	0.374	2.3	22.8	A
M073805	A 7	3.5	2.7	25.0	0.42	9.0	0.55	0.138	0.105	0.984	0.016	0.353	3.2	20.5	A
M073905	A 7	3.5	2.6	25.0	0.46	11.4	0.70	0.138	0.102	0.984	0.018	0.450	4.0	24.0	A
A7-4115-2M	A 7	3.6	3.0	25.4	0.32	5.3	0.20	0.142	0.117	1.000	0.012	0.208	1.1	15.8	A
A7-4117-2M	A 7	3.6	2.9	25.4	0.35	6.2	0.27	0.142	0.115	1.000	0.014	0.245	1.5	17.0	A
052208	A 7	3.6	2.8	25.4	0.38	6.7	0.40	0.142	0.112	1.000	0.015	0.263	2.3	16.8	A
052308	A 7	3.6	2.8	25.4	0.42	7.7	0.60	0.142	0.109	1.000	0.016	0.304	3.4	17.5	A
052408	A 7	3.6	2.7	25.4	0.46	9.4	0.80	0.142	0.106	1.000	0.018	0.369	4.5	19.5	A
A7-4127-2M	A 7	3.6	2.6	25.4	0.51	11.5	1.08	0.142	0.102	1.000	0.020	0.453	6.2	22.7	C
A7-4129-2M	A 7	3.6	2.5	25.4	0.56	13.2	1.59	0.142	0.098	1.000	0.022	0.520	9.1	23.6	C
M073606	A 7	3.5	2.7	30.0	0.38	10.2	0.27	0.138	0.108	1.181	0.015	0.403	1.5	26.3	B
M073706	A 7	3.5	2.7	30.0	0.40	11.2	0.34	0.138	0.106	1.181	0.016	0.441	1.9	27.0	B
M073806	A 7	3.5	2.7	30.0	0.42	10.6	0.46	0.138	0.105	1.181	0.016	0.417	2.6	24.4	B
M073906	A 7	3.5	2.6	30.0	0.46	13.6	0.57	0.138	0.102	1.181	0.018	0.535	3.3	28.8	B
052210	A 7	3.6	2.8	31.8	0.38	8.1	0.32	0.142	0.112	1.250	0.015	0.318	1.8	20.5	B
052310	A 7	3.6	2.8	31.8	0.42	9.4	0.48	0.142	0.109	1.250	0.016	0.369	2.7	21.5	B
052410	A 7	3.6	2.7	31.8	0.46	11.2	0.65	0.142	0.106	1.250	0.018	0.441	3.7	23.5	B
M073607	A 7	3.5	2.7	35.0	0.38	11.8	0.23	0.138	0.108	1.378	0.015	0.466	1.3	30.5	B
M073707	A 7	3.5	2.7	35.0	0.40	13.0	0.29	0.138	0.106	1.378	0.016	0.512	1.6	31.5	B
M073807	A 7	3.5	2.7	35.0	0.42	12.2	0.39	0.138	0.105	1.378	0.016	0.481	2.2	28.3	B
M073907	A 7	3.5	2.6	35.0	0.46	15.8	0.49	0.138	0.102	1.378	0.018	0.621	2.8	33.5	B
052212	A 7	3.6	2.8	38.1	0.38	9.5	0.27	0.142	0.112	1.500	0.015	0.374	1.5	24.3	B
052312	A 7	3.6	2.8	38.1	0.42	10.9	0.40	0.142	0.109	1.500	0.016	0.431	2.3	25.3	B
052412	A 7	3.6	2.7	38.1	0.46	13.3	0.54	0.142	0.106	1.500	0.018	0.522	3.1	28.0	B
M073608	A 7	3.5	2.7	40.0	0.38	13.4	0.20	0.138	0.108	1.575	0.015	0.529	1.1	34.8	B
M073708	A 7	3.5	2.7	40.0	0.40	14.8	0.25	0.138	0.106	1.575	0.016	0.583	1.4	36.0	B
M073808	A 7	3.5	2.7	40.0	0.42	13.8	0.34	0.138	0.105	1.575	0.016	0.543	1.9	32.1	B
M073908	A 7	3.5	2.6	40.0	0.46	17.9	0.42	0.138	0.102	1.575	0.018	0.706	2.4	38.3	B
052214	A 7	3.6	2.8	44.5	0.38	10.9	0.23	0.142	0.112	1.750	0.015	0.429	1.3	28.0	B
052314	A 7	3.6	2.8	44.5	0.42	12.6	0.34	0.142	0.109	1.750	0.016	0.497	1.9	29.3	B
052414	A 7	3.6	2.7	44.5	0.46	15.2	0.46	0.142	0.106	1.750	0.018	0.597	2.6	32.2	B
M073610	A 7	3.5	2.7	50.0	0.38	16.6	0.16	0.138	0.108	1.969	0.015	0.655	0.9	43.3	B
M073710	A 7	3.5	2.7	50.0	0.40	18.3	0.20	0.138	0.106	1.969	0.016	0.720	1.1	44.8	B
M073810	A 7	3.5	2.7	50.0	0.42	17.1	0.27	0.138	0.105	1.969	0.016	0.671	1.5	39.9	B
M073910	A 7	3.5	2.6	50.0	0.46	22.3	0.34	0.138	0.102	1.969	0.018	0.877	1.9	47.8	B
052216	A 7	3.6	2.8	50.8	0.38	12.3	0.20	0.142	0.112	2.000	0.015	0.485	1.1	31.8	B
052316	A 7	3.6	2.8	50.8	0.42	14.2	0.30	0.142	0.109	2.000	0.016	0.558	1.7	33.0	B
052416	A 7	3.6	2.7	50.8	0.46	17.4	0.40	0.142	0.106	2.000	0.018	0.684	2.3	37.0	B
A8-1519-2M	A 8	4.1	3.3	6.4	0.38	2.2	1.39	0.161	0.132	0.250	0.015	0.085	8.0	4.8	A
A8-1521-2M	A 8	4.1	3.3	6.4	0.42	2.5	1.99	0.161	0.129	0.250	0.016	0.099	11.4	5.0	A
A8-1524-2M	A 8	4.1	3.2	6.4	0.46	2.8	2.82	0.161	0.125	0.250	0.018	0.111	16.1	5.2	A
062502	A 8	4.1	3.1	6.4	0.51	2.7	4.38	0.161	0.121	0.250	0.020	0.105	25.0	5.3	B
062602	A 8	4.1	3.0	6.4	0.56	3.0	6.41	0.161	0.117	0.250	0.022	0.119	36.6	5.4	C

For Sales or Assistance - Tel 0117 967 3313

All characteristics are nominal


Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	lbs/in	approx	
062702	A 8	4.1	2.9	6.4	0.61	3.4	9.22	0.161	0.113	0.250	0.024	0.132	52.7	5.5	C
A8-1534-2M	A 8	4.1	2.7	6.4	0.71	4.3	16.03	0.161	0.105	0.250	0.028	0.170	91.6	6.1	C
A8-1919-2M	A 8	4.1	3.3	8.0	0.38	2.5	1.06	0.161	0.132	0.315	0.015	0.098	6.0	5.6	A
A8-1921-2M	A 8	4.1	3.3	8.0	0.42	2.9	1.51	0.161	0.129	0.315	0.016	0.115	8.6	6.0	A
A8-1924-2M	A 8	4.1	3.2	8.0	0.46	3.3	2.12	0.161	0.125	0.315	0.018	0.130	12.1	6.2	A
A8-1927-2M	A 8	4.1	3.1	8.0	0.51	3.5	2.94	0.161	0.121	0.315	0.020	0.137	16.8	6.8	B
A8-1929-2M	A 8	4.1	3.0	8.0	0.56	4.0	4.29	0.161	0.117	0.315	0.022	0.156	24.5	7.1	C
A8-1931-2M	A 8	4.1	2.9	8.0	0.61	4.4	6.12	0.161	0.113	0.315	0.024	0.175	34.9	7.3	C
A8-1934-2M	A 8	4.1	2.7	8.0	0.71	5.3	12.01	0.161	0.105	0.315	0.028	0.208	68.6	7.4	C
A8-2219-2M	A 8	4.1	3.3	9.5	0.38	2.8	0.87	0.161	0.132	0.375	0.015	0.110	4.9	6.4	A
A8-2221-2M	A 8	4.1	3.3	9.5	0.42	3.3	1.23	0.161	0.129	0.375	0.016	0.130	7.0	6.9	A
A8-2224-2M	A 8	4.1	3.2	9.5	0.46	3.7	1.72	0.161	0.125	0.375	0.018	0.148	9.8	7.2	A
062503	A 8	4.1	3.1	9.5	0.51	3.6	2.85	0.161	0.121	0.375	0.020	0.140	16.3	7.0	B
062603	A 8	4.1	3.0	9.5	0.56	4.2	3.96	0.161	0.117	0.375	0.022	0.165	22.6	7.5	C
062703	A 8	4.1	2.9	9.5	0.61	4.7	5.66	0.161	0.113	0.375	0.024	0.185	32.3	7.7	C
A8-2234-2M	A 8	4.1	2.7	9.5	0.71	6.2	9.75	0.161	0.105	0.375	0.028	0.243	55.6	8.7	C
A8-2319-2M	A 8	4.0	3.2	10.0	0.38	3.0	0.85	0.157	0.128	0.394	0.015	0.117	4.9	6.9	A
M083702	A 8	4.0	3.2	10.0	0.40	3.7	0.87	0.157	0.126	0.394	0.016	0.146	5.0	8.3	A
M083802	A 8	4.0	3.2	10.0	0.42	3.7	1.12	0.157	0.125	0.394	0.016	0.144	6.4	7.8	A
M083902	A 8	4.0	3.1	10.0	0.46	4.3	1.50	0.157	0.121	0.394	0.018	0.171	8.5	8.5	A
M084102	A 8	4.0	3.0	10.0	0.51	4.7	2.14	0.157	0.117	0.394	0.020	0.185	12.2	9.3	C
A8-2719-2M	A 8	4.1	3.3	12.7	0.38	3.4	0.63	0.161	0.132	0.500	0.015	0.135	3.6	8.1	A
A8-2721-2M	A 8	4.1	3.3	12.7	0.42	4.1	0.89	0.161	0.129	0.500	0.016	0.160	5.1	8.8	A
A8-2724-2M	A 8	4.1	3.2	12.7	0.46	4.7	1.24	0.161	0.125	0.500	0.018	0.184	7.1	9.2	A
062504	A 8	4.1	3.1	12.7	0.51	4.4	2.11	0.161	0.121	0.500	0.020	0.175	12.0	8.8	C
062604	A 8	4.1	3.0	12.7	0.56	5.2	2.99	0.161	0.117	0.500	0.022	0.205	17.1	9.3	C
062704	A 8	4.1	2.9	12.7	0.61	6.0	4.14	0.161	0.113	0.500	0.024	0.235	23.6	9.8	C
A8-2734-2M	A 8	4.1	2.7	12.7	0.71	8.0	7.01	0.161	0.105	0.500	0.028	0.316	40.0	11.3	C
A8-3019-2M	A 8	4.0	3.2	15.0	0.38	4.0	0.54	0.157	0.128	0.591	0.015	0.158	3.1	9.7	A
M083703	A 8	4.0	3.2	15.0	0.40	5.1	0.56	0.157	0.126	0.591	0.016	0.201	3.2	11.8	A
M083803	A 8	4.0	3.2	15.0	0.42	5.1	0.71	0.157	0.125	0.591	0.016	0.200	4.0	11.2	A
M083903	A 8	4.0	3.1	15.0	0.46	6.2	0.93	0.157	0.121	0.591	0.018	0.243	5.3	12.5	A
M084103	A 8	4.0	3.0	15.0	0.51	6.7	1.38	0.157	0.117	0.591	0.020	0.265	7.9	13.3	C
A8-3119-2M	A 8	4.1	3.3	15.9	0.38	4.1	0.49	0.161	0.132	0.625	0.015	0.160	2.8	9.8	A
A8-3121-2M	A 8	4.1	3.3	15.9	0.42	4.9	0.69	0.161	0.129	0.625	0.016	0.191	4.0	10.6	A
A8-3124-2M	A 8	4.1	3.2	15.9	0.46	5.6	0.97	0.161	0.125	0.625	0.018	0.220	5.5	11.2	A
062505	A 8	4.1	3.1	15.9	0.51	5.5	1.63	0.161	0.121	0.625	0.020	0.215	9.3	10.8	C
062605	A 8	4.1	3.0	15.9	0.56	6.4	2.32	0.161	0.117	0.625	0.022	0.251	13.2	11.4	C
062705	A 8	4.1	2.9	15.9	0.61	7.3	3.23	0.161	0.113	0.625	0.024	0.288	18.4	12.0	C
A8-3134-2M	A 8	4.1	2.7	15.9	0.71	9.9	5.47	0.161	0.105	0.625	0.028	0.389	31.2	13.9	C
A8-3419-2M	A 8	4.1	3.3	17.5	0.38	4.4	0.44	0.161	0.132	0.689	0.015	0.172	2.5	10.6	A
A8-3421-2M	A 8	4.1	3.3	17.5	0.42	5.3	0.63	0.161	0.129	0.689	0.016	0.207	3.6	11.6	A
A8-3424-2M	A 8	4.1	3.2	17.5	0.46	6.1	0.87	0.161	0.125	0.689	0.018	0.239	5.0	12.3	A
A8-3427-2M	A 8	4.1	3.1	17.5	0.51	6.8	1.25	0.161	0.121	0.689	0.020	0.268	7.1	13.4	C
A8-3429-2M	A 8	4.1	3.0	17.5	0.56	7.9	1.80	0.161	0.117	0.689	0.022	0.311	10.3	14.1	C
A8-3431-2M	A 8	4.1	2.9	17.5	0.61	8.9	2.55	0.161	0.113	0.689	0.024	0.352	14.6	14.7	C
A8-3434-2M	A 8	4.1	2.7	17.5	0.71	10.8	4.91	0.161	0.105	0.689	0.028	0.427	28.1	15.2	C
A8-3619-2M	A 8	4.1	3.3	19.1	0.38	4.7	0.41	0.161	0.132	0.750	0.015	0.184	2.3	11.5	A
A8-3621-2M	A 8	4.1	3.3	19.1	0.42	5.6	0.57	0.161	0.129	0.750	0.016	0.222	3.3	12.5	A
A8-3624-2M	A 8	4.1	3.2	19.1	0.46	6.5	0.79	0.161	0.125	0.750	0.018	0.257	4.5	13.3	A
062506	A 8	4.1	3.1	19.1	0.51	6.4	1.36	0.161	0.121	0.750	0.020	0.250	7.7	12.5	C

Choose from millions of sizes - www.flexosprings.com

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	Lbs/in	approx	
062606	A 8	4.1	3.0	19.1	0.56	7.4	1.95	0.161	0.117	0.750	0.022	0.291	11.1	13.2	C
062706	A 8	4.1	2.9	19.1	0.61	8.5	2.71	0.161	0.113	0.750	0.024	0.334	15.5	13.9	C
A8-3634-2M	A 8	4.1	2.7	19.1	0.71	11.7	4.48	0.161	0.105	0.750	0.028	0.462	25.6	16.5	C
A8-3719-2M	A 8	4.0	3.2	20.0	0.38	5.0	0.40	0.157	0.128	0.787	0.015	0.199	2.3	12.4	A
M083704	A 8	4.0	3.2	20.0	0.40	6.5	0.41	0.157	0.126	0.787	0.016	0.256	2.3	15.3	A
M083804	A 8	4.0	3.2	20.0	0.42	6.4	0.53	0.157	0.125	0.787	0.016	0.253	3.0	14.4	A
M083904	A 8	4.0	3.1	20.0	0.46	8.0	0.67	0.157	0.121	0.787	0.018	0.315	3.8	16.5	A
M084104	A 8	4.0	3.0	20.0	0.51	8.9	1.00	0.157	0.117	0.787	0.020	0.350	5.7	17.5	C
062507	A 8	4.1	3.1	22.2	0.51	7.2	1.16	0.161	0.121	0.875	0.020	0.285	6.6	14.3	C
062607	A 8	4.1	3.0	22.2	0.56	8.3	1.69	0.161	0.117	0.875	0.022	0.328	9.6	14.9	C
062707	A 8	4.1	2.9	22.2	0.61	9.6	2.34	0.161	0.113	0.875	0.024	0.379	13.4	15.8	C
M083705	A 8	4.0	3.2	25.0	0.40	7.9	0.32	0.157	0.126	0.984	0.016	0.311	1.9	18.8	A
M083805	A 8	4.0	3.2	25.0	0.42	7.8	0.41	0.157	0.125	0.984	0.016	0.309	2.4	17.8	A
M083905	A 8	4.0	3.1	25.0	0.46	9.7	0.53	0.157	0.121	0.984	0.018	0.382	3.0	20.3	A
M084105	A 8	4.0	3.0	25.0	0.51	10.9	0.80	0.157	0.117	0.984	0.020	0.430	4.5	21.5	C
A8-4119-2M	A 8	4.1	3.3	25.4	0.38	5.9	0.30	0.161	0.132	1.000	0.015	0.234	1.7	14.8	A
A8-4121-2M	A 8	4.1	3.3	25.4	0.42	7.2	0.42	0.161	0.129	1.000	0.016	0.283	2.4	16.3	A
A8-4124-2M	A 8	4.1	3.2	25.4	0.46	8.4	0.58	0.161	0.125	1.000	0.018	0.330	3.3	17.3	A
062508	A 8	4.1	3.1	25.4	0.51	8.1	1.02	0.161	0.121	1.000	0.020	0.320	5.8	16.0	C
062608	A 8	4.1	3.0	25.4	0.56	9.3	1.49	0.161	0.117	1.000	0.022	0.365	8.5	16.6	C
062708	A 8	4.1	2.9	25.4	0.61	10.9	2.03	0.161	0.113	1.000	0.024	0.430	11.6	17.9	C
A8-4134-2M	A 8	4.1	2.7	25.4	0.71	15.5	3.30	0.161	0.105	1.000	0.028	0.609	18.8	21.7	C
M083706	A 8	4.0	3.2	30.0	0.40	9.3	0.27	0.157	0.126	1.181	0.016	0.366	1.5	22.3	B
M083806	A 8	4.0	3.2	30.0	0.42	9.2	0.34	0.157	0.125	1.181	0.016	0.361	2.0	21.0	B
M083906	A 8	4.0	3.1	30.0	0.46	11.4	0.44	0.157	0.121	1.181	0.018	0.450	2.5	24.0	B
M084106	A 8	4.0	3.0	30.0	0.51	13.0	0.66	0.157	0.117	1.181	0.020	0.510	3.8	25.5	C
062510	A 8	4.1	3.1	31.8	0.51	9.9	0.81	0.161	0.121	1.250	0.020	0.390	4.6	19.5	C
062610	A 8	4.1	3.0	31.8	0.56	11.5	1.18	0.161	0.117	1.250	0.022	0.451	6.7	20.5	C
062710	A 8	4.1	2.9	31.8	0.61	13.4	1.61	0.161	0.113	1.250	0.024	0.528	9.2	22.0	C
M083707	A 8	4.0	3.2	35.0	0.40	10.7	0.23	0.157	0.126	1.378	0.016	0.421	1.3	25.8	B
M083807	A 8	4.0	3.2	35.0	0.42	10.6	0.29	0.157	0.125	1.378	0.016	0.419	1.7	24.5	B
M083907	A 8	4.0	3.1	35.0	0.46	13.1	0.38	0.157	0.121	1.378	0.018	0.517	2.2	27.8	B
M084107	A 8	4.0	3.0	35.0	0.51	15.1	0.56	0.157	0.117	1.378	0.020	0.595	3.2	29.8	C
062512	A 8	4.1	3.1	38.1	0.51	11.8	0.67	0.161	0.121	1.500	0.020	0.465	3.8	23.3	C
062612	A 8	4.1	3.0	38.1	0.56	13.4	0.99	0.161	0.117	1.500	0.022	0.528	5.7	24.0	C
062712	A 8	4.1	2.9	38.1	0.61	15.9	1.35	0.161	0.113	1.500	0.024	0.624	7.7	26.0	C
M083708	A 8	4.0	3.2	40.0	0.40	12.1	0.20	0.157	0.126	1.575	0.016	0.476	1.1	29.3	B
M083808	A 8	4.0	3.2	40.0	0.42	12.0	0.25	0.157	0.125	1.575	0.016	0.473	1.4	27.8	B
M083908	A 8	4.0	3.1	40.0	0.46	15.0	0.33	0.157	0.121	1.575	0.018	0.589	1.9	31.8	B
M084108	A 8	4.0	3.0	40.0	0.51	17.1	0.49	0.157	0.117	1.575	0.020	0.675	2.8	33.8	C
062514	A 8	4.1	3.1	44.5	0.51	13.6	0.58	0.161	0.121	1.750	0.020	0.535	3.3	26.8	C
062614	A 8	4.1	3.0	44.5	0.56	15.6	0.84	0.161	0.117	1.750	0.022	0.614	4.8	27.9	C
062714	A 8	4.1	2.9	44.5	0.61	18.5	1.14	0.161	0.113	1.750	0.024	0.728	6.5	30.3	C
M083710	A 8	4.0	3.2	50.0	0.40	15.0	0.16	0.157	0.126	1.969	0.016	0.591	0.9	36.5	B
M083810	A 8	4.0	3.2	50.0	0.42	14.6	0.20	0.157	0.125	1.969	0.016	0.575	1.2	34.0	B
M083910	A 8	4.0	3.1	50.0	0.46	18.4	0.26	0.157	0.121	1.969	0.018	0.724	1.5	39.3	B
M084110	A 8	4.0	3.0	50.0	0.51	21.3	0.39	0.157	0.117	1.969	0.020	0.840	2.2	42.0	C
062516	A 8	4.1	3.1	50.8	0.51	15.4	0.50	0.161	0.121	2.000	0.020	0.605	2.9	30.3	C
062616	A 8	4.1	3.0	50.8	0.56	17.6	0.74	0.161	0.117	2.000	0.022	0.691	4.2	31.4	C
062716	A 8	4.1	2.9	50.8	0.61	20.7	1.01	0.161	0.113	2.000	0.024	0.817	5.8	34.0	D
A9-1519-2M	A 9	4.6	3.8	6.4	0.38	2.0	1.19	0.181	0.151	0.250	0.015	0.077	6.8	4.2	A

For Sales or Assistance - Tel 0117 967 3313

All characteristics are nominal

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	Lbs/in	approx	
A9-1521-2M	A 9	4.6	3.8	6.4	0.42	2.3	1.68	0.181	0.148	0.250	0.016	0.089	9.6	4.4	A
062402	A 9	4.5	3.6	6.4	0.46	2.7	2.18	0.177	0.141	0.250	0.018	0.108	12.5	5.0	A
A9-1527-2M	A 9	4.5	3.5	6.4	0.51	2.6	3.28	0.177	0.137	0.250	0.020	0.103	18.7	5.2	B
A9-1529-2M	A 9	4.5	3.4	6.4	0.56	3.0	4.73	0.177	0.133	0.250	0.022	0.118	27.0	5.3	C
A9-1531-2M	A 9	4.5	3.3	6.4	0.61	3.3	6.68	0.177	0.129	0.250	0.024	0.132	38.1	5.5	C
A9-1534-2M	A 9	4.6	3.2	6.4	0.71	3.9	12.23	0.181	0.125	0.250	0.028	0.155	69.9	5.5	C
A9-1919-2M	A 9	4.6	3.8	8.0	0.38	2.2	0.90	0.181	0.151	0.315	0.015	0.087	5.2	4.9	A
A9-1921-2M	A 9	4.6	3.8	8.0	0.42	2.6	1.27	0.181	0.148	0.315	0.016	0.102	7.3	5.2	A
A9-1924-2M	A 9	4.5	3.6	8.0	0.46	3.0	1.83	0.177	0.141	0.315	0.018	0.118	10.4	5.6	A
A9-1927-2M	A 9	4.5	3.5	8.0	0.51	3.1	2.50	0.177	0.137	0.315	0.020	0.123	14.3	6.1	B
A9-1929-2M	A 9	4.5	3.4	8.0	0.56	3.6	3.59	0.177	0.133	0.315	0.022	0.141	20.5	6.4	C
A9-1931-2M	A 9	4.5	3.3	8.0	0.61	4.0	5.06	0.177	0.129	0.315	0.024	0.159	28.9	6.6	C
A9-1934-2M	A 9	4.6	3.2	8.0	0.71	4.8	9.16	0.181	0.125	0.315	0.028	0.188	52.3	6.7	C
A9-2219-2M	A 9	4.6	3.8	9.5	0.38	2.5	0.74	0.181	0.151	0.375	0.015	0.097	4.2	5.6	A
A9-2221-2M	A 9	4.6	3.8	9.5	0.42	2.9	1.04	0.181	0.148	0.375	0.016	0.114	5.9	6.0	A
062403	A 9	4.5	3.6	9.5	0.46	3.4	1.45	0.177	0.141	0.375	0.018	0.135	8.3	6.5	A
A9-2227-2M	A 9	4.5	3.5	9.5	0.51	3.6	2.05	0.177	0.137	0.375	0.020	0.141	11.7	7.1	B
A9-2229-2M	A 9	4.5	3.4	9.5	0.56	4.1	2.94	0.177	0.133	0.375	0.022	0.162	16.8	7.4	C
A9-2231-2M	A 9	4.5	3.3	9.5	0.61	4.7	4.12	0.177	0.129	0.375	0.024	0.184	23.6	7.7	C
A9-2234-2M	A 9	4.6	3.2	9.5	0.71	5.5	7.44	0.181	0.125	0.375	0.028	0.218	42.5	7.8	C
A9-2321-2M	A 9	4.5	3.7	10.0	0.42	3.1	1.01	0.177	0.144	0.394	0.016	0.121	5.8	6.4	A
M093902	A 9	4.5	3.6	10.0	0.46	3.9	1.19	0.177	0.141	0.394	0.018	0.153	6.8	7.5	A
M094102	A 9	4.5	3.5	10.0	0.51	4.1	1.73	0.177	0.137	0.394	0.020	0.160	9.9	8.0	C
M094302	A 9	4.5	3.4	10.0	0.56	4.6	2.53	0.177	0.133	0.394	0.022	0.182	14.4	8.3	C
M094402	A 9	4.5	3.3	10.0	0.61	5.2	3.59	0.177	0.129	0.394	0.024	0.204	20.5	8.5	C
A9-2719-2M	A 9	4.6	3.8	12.7	0.38	3.0	0.54	0.181	0.151	0.500	0.015	0.117	3.1	6.9	A
A9-2721-2M	A 9	4.6	3.8	12.7	0.42	3.5	0.75	0.181	0.148	0.500	0.016	0.139	4.3	7.5	A
062404	A 9	4.5	3.6	12.7	0.46	4.1	1.09	0.177	0.141	0.500	0.018	0.162	6.2	8.0	A
A9-2727-2M	A 9	4.5	3.5	12.7	0.51	4.5	1.50	0.177	0.137	0.500	0.020	0.179	8.5	8.9	C
A9-2729-2M	A 9	4.5	3.4	12.7	0.56	5.3	2.14	0.177	0.133	0.500	0.022	0.207	12.2	9.4	C
A9-2731-2M	A 9	4.5	3.3	12.7	0.61	6.0	2.99	0.177	0.129	0.500	0.024	0.236	17.0	9.8	C
A9-2734-2M	A 9	4.6	3.2	12.7	0.71	7.2	5.35	0.181	0.125	0.500	0.028	0.282	30.5	10.1	C
A9-3021-2M	A 9	4.5	3.7	15.0	0.42	4.1	0.64	0.177	0.144	0.591	0.016	0.162	3.7	8.8	A
M093903	A 9	4.5	3.6	15.0	0.46	5.4	0.75	0.177	0.141	0.591	0.018	0.211	4.3	10.8	A
M094103	A 9	4.5	3.5	15.0	0.51	5.8	1.09	0.177	0.137	0.591	0.020	0.230	6.2	11.5	C
M094303	A 9	4.5	3.4	15.0	0.56	6.7	1.58	0.177	0.133	0.591	0.022	0.264	9.0	12.0	C
M094403	A 9	4.5	3.3	15.0	0.61	7.5	2.27	0.177	0.129	0.591	0.024	0.294	13.0	12.3	C
A9-3119-2M	A 9	4.6	3.8	15.9	0.38	3.5	0.42	0.181	0.151	0.625	0.015	0.137	2.4	8.2	A
A9-3121-2M	A 9	4.6	3.8	15.9	0.42	4.2	0.59	0.181	0.148	0.625	0.016	0.164	3.3	9.0	A
062405	A 9	4.5	3.6	15.9	0.46	4.8	0.87	0.177	0.141	0.625	0.018	0.189	5.0	9.5	A
A9-3127-2M	A 9	4.5	3.5	15.9	0.51	5.5	1.18	0.177	0.137	0.625	0.020	0.216	6.7	10.8	C
A9-3129-2M	A 9	4.5	3.4	15.9	0.56	6.4	1.68	0.177	0.133	0.625	0.022	0.252	9.6	11.4	C
A9-3131-2M	A 9	4.5	3.3	15.9	0.61	7.3	2.34	0.177	0.129	0.625	0.024	0.288	13.3	12.0	C
A9-3134-2M	A 9	4.6	3.2	15.9	0.71	8.8	4.17	0.181	0.125	0.625	0.028	0.345	23.8	12.3	C
A9-3419-2M	A 9	4.6	3.8	17.5	0.38	3.7	0.38	0.181	0.151	0.689	0.015	0.147	2.2	8.9	A
A9-3421-2M	A 9	4.6	3.8	17.5	0.42	4.5	0.53	0.181	0.148	0.689	0.016	0.177	3.0	9.8	A
A9-3424-2M	A 9	4.5	3.6	17.5	0.46	5.4	0.75	0.177	0.141	0.689	0.018	0.211	4.3	10.7	A
A9-3427-2M	A 9	4.5	3.5	17.5	0.51	6.0	1.06	0.177	0.137	0.689	0.020	0.236	6.1	11.8	C
A9-3429-2M	A 9	4.5	3.4	17.5	0.56	7.0	1.51	0.177	0.133	0.689	0.022	0.274	8.6	12.5	C
A9-3431-2M	A 9	4.5	3.3	17.5	0.61	8.0	2.11	0.177	0.129	0.689	0.024	0.314	12.0	13.1	C
A9-3434-2M	A 9	4.6	3.2	17.5	0.71	9.6	3.75	0.181	0.125	0.689	0.028	0.377	21.4	13.5	C

Choose from millions of sizes - www.flexosprings.com

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No. of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	Lbs/in	approx	
A9-3619-2M	A 9	4.6	3.8	19.1	0.38	4.0	0.35	0.181	0.151	0.750	0.015	0.157	2.0	9.6	A
A9-3621-2M	A 9	4.6	3.8	19.1	0.42	4.8	0.48	0.181	0.148	0.750	0.016	0.189	2.8	10.5	A
062406	A 9	4.5	3.6	19.1	0.46	5.5	0.73	0.177	0.141	0.750	0.018	0.216	4.2	11.0	A
A9-3627-2M	A 9	4.5	3.5	19.1	0.51	6.5	0.97	0.177	0.137	0.750	0.020	0.254	5.5	12.7	C
A9-3629-2M	A 9	4.5	3.4	19.1	0.56	7.5	1.38	0.177	0.133	0.750	0.022	0.296	7.9	13.5	C
A9-3631-2M	A 9	4.5	3.3	19.1	0.61	8.6	1.92	0.177	0.129	0.750	0.024	0.339	11.0	14.1	C
A9-3634-2M	A 9	4.6	3.2	19.1	0.71	10.4	3.42	0.181	0.125	0.750	0.028	0.408	19.5	14.6	C
A9-3721-2M	A 9	4.5	3.7	20.0	0.42	5.1	0.47	0.177	0.144	0.787	0.016	0.202	2.7	11.3	A
M093904	A 9	4.5	3.6	20.0	0.46	6.9	0.55	0.177	0.141	0.787	0.018	0.270	3.1	14.0	A
M094104	A 9	4.5	3.5	20.0	0.51	7.5	0.81	0.177	0.137	0.787	0.020	0.295	4.6	14.8	C
M094304	A 9	4.5	3.4	20.0	0.56	8.8	1.15	0.177	0.133	0.787	0.022	0.347	6.6	15.8	C
M094404	A 9	4.5	3.3	20.0	0.61	9.8	1.67	0.177	0.129	0.787	0.024	0.384	9.5	16.0	C
A9-3819-2M	A 9	4.6	3.8	22.2	0.38	4.5	0.29	0.181	0.151	0.875	0.015	0.177	1.7	10.9	A
A9-3821-2M	A 9	4.6	3.8	22.2	0.42	5.4	0.41	0.181	0.148	0.875	0.016	0.214	2.3	12.0	A
062407	A 9	4.5	3.6	22.2	0.46	6.2	0.62	0.177	0.141	0.875	0.018	0.243	3.6	12.5	A
A9-3827-2M	A 9	4.5	3.5	22.2	0.51	7.4	0.82	0.177	0.137	0.875	0.020	0.292	4.7	14.6	C
A9-3829-2M	A 9	4.5	3.4	22.2	0.56	8.7	1.17	0.177	0.133	0.875	0.022	0.341	6.7	15.5	C
A9-3831-2M	A 9	4.5	3.3	22.2	0.61	9.9	1.63	0.177	0.129	0.875	0.024	0.391	9.3	16.3	C
A9-3834-2M	A 9	4.6	3.2	22.2	0.71	12.0	2.90	0.181	0.125	0.875	0.028	0.472	16.5	16.9	C
A9-4021-2M	A 9	4.5	3.7	25.0	0.42	6.2	0.37	0.177	0.144	0.984	0.016	0.243	2.1	13.8	A
M093905	A 9	4.5	3.6	25.0	0.46	8.3	0.43	0.177	0.141	0.984	0.018	0.328	2.4	17.3	A
M094105	A 9	4.5	3.5	25.0	0.51	9.3	0.64	0.177	0.137	0.984	0.020	0.365	3.6	18.3	C
M094305	A 9	4.5	3.4	25.0	0.56	10.8	0.92	0.177	0.133	0.984	0.022	0.424	5.2	19.3	C
M094405	A 9	4.5	3.3	25.0	0.61	12.0	1.31	0.177	0.129	0.984	0.024	0.474	7.5	19.8	C
A9-4119-2M	A 9	4.6	3.8	25.4	0.38	5.0	0.26	0.181	0.151	1.000	0.015	0.196	1.5	12.3	A
A9-4121-2M	A 9	4.6	3.8	25.4	0.42	6.1	0.35	0.181	0.148	1.000	0.016	0.239	2.0	13.5	A
062408	A 9	4.5	3.6	25.4	0.46	7.0	0.53	0.177	0.141	1.000	0.018	0.274	3.0	14.3	A
A9-4127-2M	A 9	4.5	3.5	25.4	0.51	8.4	0.72	0.177	0.137	1.000	0.020	0.329	4.1	16.5	C
A9-4129-2M	A 9	4.5	3.4	25.4	0.56	9.8	1.02	0.177	0.133	1.000	0.022	0.386	5.8	17.5	C
A9-4131-2M	A 9	4.5	3.3	25.4	0.61	11.3	1.42	0.177	0.129	1.000	0.024	0.443	8.1	18.4	C
A9-4134-2M	A 9	4.6	3.2	25.4	0.71	13.6	2.51	0.181	0.125	1.000	0.028	0.535	14.4	19.1	C
M093906	A 9	4.5	3.6	30.0	0.46	9.8	0.35	0.177	0.141	1.181	0.018	0.387	2.0	20.5	B
M094106	A 9	4.5	3.5	30.0	0.51	11.0	0.53	0.177	0.137	1.181	0.020	0.435	3.0	21.8	C
M094306	A 9	4.5	3.4	30.0	0.56	12.9	0.75	0.177	0.133	1.181	0.022	0.506	4.3	23.0	C
M094406	A 9	4.5	3.3	30.0	0.61	14.3	1.08	0.177	0.129	1.181	0.024	0.564	6.2	23.5	C
062410	A 9	4.5	3.6	31.8	0.46	8.3	0.43	0.177	0.141	1.250	0.018	0.328	2.4	17.3	B
M093907	A 9	4.5	3.6	35.0	0.46	11.3	0.30	0.177	0.141	1.378	0.018	0.445	1.7	23.8	B
M094107	A 9	4.5	3.5	35.0	0.51	12.8	0.45	0.177	0.137	1.378	0.020	0.505	2.5	25.3	C
M094307	A 9	4.5	3.4	35.0	0.56	15.0	0.64	0.177	0.133	1.378	0.022	0.589	3.6	26.8	C
M094407	A 9	4.5	3.3	35.0	0.61	16.6	0.92	0.177	0.129	1.378	0.024	0.654	5.3	27.3	C
062412	A 9	4.5	3.6	38.1	0.46	9.8	0.35	0.177	0.141	1.500	0.018	0.387	2.0	20.5	B
M093908	A 9	4.5	3.6	40.0	0.46	12.8	0.26	0.177	0.141	1.575	0.018	0.504	1.5	27.0	B
M094108	A 9	4.5	3.5	40.0	0.51	14.5	0.39	0.177	0.137	1.575	0.020	0.570	2.2	28.5	C
M094308	A 9	4.5	3.4	40.0	0.56	16.9	0.56	0.177	0.133	1.575	0.022	0.666	3.2	30.3	C
M094408	A 9	4.5	3.3	40.0	0.61	18.9	0.80	0.177	0.129	1.575	0.024	0.744	4.6	31.0	C
062414	A 9	4.5	3.6	44.5	0.46	11.2	0.30	0.177	0.141	1.750	0.018	0.441	1.7	23.5	B
M093910	A 9	4.5	3.6	50.0	0.46	15.8	0.21	0.177	0.141	1.969	0.018	0.621	1.2	33.5	B
M094110	A 9	4.5	3.5	50.0	0.51	17.9	0.31	0.177	0.137	1.969	0.020	0.705	1.8	35.3	C
M094310	A 9	4.5	3.4	50.0	0.56	21.0	0.45	0.177	0.133	1.969	0.022	0.825	2.5	37.5	C
M094410	A 9	4.5	3.3	50.0	0.61	23.5	0.64	0.177	0.129	1.969	0.024	0.925	3.6	38.5	D
062416	A 9	4.5	3.6	50.8	0.46	12.7	0.26	0.177	0.141	2.000	0.018	0.499	1.5	26.8	B

For Sales or Assistance - Tel 0117 967 3313

All characteristics are nominal

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No. of Coils	PRICE RANGE
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	lbs/in		
B1-1521-2M	B 1	5.1	4.3	6.4	0.42	2.1	1.46	0.201	0.168	0.250	0.016	0.082	8.3	4.0	A
072402	B 1	5.1	4.2	6.4	0.46	2.4	1.92	0.201	0.165	0.250	0.018	0.094	11.0	4.3	A
072502	B 1	4.9	3.9	6.4	0.51	2.4	2.83	0.193	0.153	0.250	0.020	0.095	16.2	4.8	B
072602	B 1	5.0	3.9	6.4	0.56	2.7	4.02	0.197	0.153	0.250	0.022	0.105	22.9	4.8	C
072702	B 1	5.0	3.8	6.4	0.61	2.9	5.90	0.197	0.149	0.250	0.024	0.114	33.7	4.8	C
072802	B 1	5.1	3.7	6.4	0.71	3.4	10.90	0.201	0.145	0.250	0.028	0.133	62.2	4.8	C
B1-1537-2M	B 1	5.0	3.4	6.4	0.81	4.2	18.50	0.197	0.133	0.250	0.032	0.166	105.6	5.2	C
B1-1921-2M	B 1	5.1	4.3	8.0	0.42	2.4	1.10	0.201	0.168	0.315	0.016	0.093	6.3	4.6	A
B1-1924-2M	B 1	5.1	4.2	8.0	0.46	2.7	1.52	0.201	0.165	0.315	0.018	0.105	8.7	4.8	A
B1-1927-2M	B 1	4.9	3.9	8.0	0.51	2.8	2.18	0.193	0.153	0.315	0.020	0.111	12.5	5.6	B
B1-1929-2M	B 1	5.0	3.9	8.0	0.56	3.2	2.99	0.197	0.153	0.315	0.022	0.125	17.1	5.7	C
B1-1931-2M	B 1	5.0	3.8	8.0	0.61	3.6	4.15	0.197	0.149	0.315	0.024	0.142	23.7	5.9	C
B1-1934-2M	B 1	5.1	3.7	8.0	0.71	4.3	7.35	0.201	0.145	0.315	0.028	0.170	42.0	6.1	C
B1-1937-2M	B 1	5.0	3.4	8.0	0.81	5.1	13.71	0.197	0.133	0.315	0.032	0.202	78.3	6.3	C
B1-2221-2M	B 1	5.1	4.3	9.5	0.42	2.6	0.90	0.201	0.168	0.375	0.016	0.103	5.1	5.3	A
072403	B 1	5.1	4.2	9.5	0.46	3.0	1.23	0.201	0.165	0.375	0.018	0.117	7.0	5.5	A
072503	B 1	4.9	3.9	9.5	0.51	3.2	1.83	0.193	0.153	0.375	0.020	0.125	10.5	6.3	B
072603	B 1	5.0	3.9	9.5	0.56	3.5	2.60	0.197	0.153	0.375	0.022	0.138	14.8	6.3	C
072703	B 1	5.0	3.8	9.5	0.61	3.8	3.82	0.197	0.149	0.375	0.024	0.150	21.8	6.3	C
072803	B 1	5.1	3.7	9.5	0.71	4.4	7.05	0.201	0.145	0.375	0.028	0.175	40.3	6.3	C
B1-2237-2M	B 1	5.0	3.4	9.5	0.81	6.0	11.05	0.197	0.133	0.375	0.032	0.235	63.1	7.3	C
B1-2324-2M	B 1	5.0	4.1	10.0	0.46	3.1	1.20	0.197	0.161	0.394	0.018	0.123	6.8	5.8	A
M104102	B 1	5.0	4.0	10.0	0.51	3.6	1.46	0.197	0.157	0.394	0.020	0.140	8.3	7.0	C
M104302	B 1	5.0	3.9	10.0	0.56	4.2	2.01	0.197	0.153	0.394	0.022	0.165	11.5	7.5	C
M104502	B 1	5.0	3.7	10.0	0.63	4.9	3.25	0.197	0.147	0.394	0.025	0.192	18.6	7.8	C
M104602	B 1	5.0	3.7	10.0	0.67	5.2	4.28	0.197	0.144	0.394	0.026	0.204	24.4	7.8	C
B1-2721-2M	B 1	5.1	4.3	12.7	0.42	3.1	0.65	0.201	0.168	0.500	0.016	0.123	3.7	6.5	A
072404	B 1	5.1	4.2	12.7	0.46	3.6	0.88	0.201	0.165	0.500	0.018	0.142	5.0	6.9	A
072504	B 1	4.9	3.9	12.7	0.51	3.8	1.42	0.193	0.153	0.500	0.020	0.150	8.1	7.5	C
072604	B 1	5.0	3.9	12.7	0.56	4.2	2.01	0.197	0.153	0.500	0.022	0.165	11.5	7.5	C
072704	B 1	5.0	3.8	12.7	0.61	4.7	2.82	0.197	0.149	0.500	0.024	0.186	16.1	7.8	C
072804	B 1	5.1	3.7	12.7	0.71	5.5	5.21	0.201	0.145	0.500	0.028	0.217	29.8	7.8	C
B1-2737-2M	B 1	5.0	3.4	12.7	0.81	7.7	7.89	0.197	0.133	0.500	0.032	0.303	45.1	9.5	C
B1-3024-2M	B 1	5.0	4.1	15.0	0.46	4.1	0.76	0.197	0.161	0.591	0.018	0.163	4.3	8.1	A
M104103	B 1	5.0	4.0	15.0	0.51	5.1	0.91	0.197	0.157	0.591	0.020	0.200	5.2	10.0	C
M104303	B 1	5.0	3.9	15.0	0.56	5.9	1.30	0.197	0.153	0.591	0.022	0.231	7.4	10.5	C
M104503	B 1	5.0	3.7	15.0	0.63	6.9	2.08	0.197	0.147	0.591	0.025	0.273	11.9	11.0	C
M104603	B 1	5.0	3.7	15.0	0.67	7.5	2.66	0.197	0.144	0.591	0.026	0.297	15.2	11.3	C
B1-3121-2M	B 1	5.1	4.3	15.9	0.42	3.6	0.51	0.201	0.168	0.625	0.016	0.144	2.9	7.7	A
072405	B 1	5.1	4.2	15.9	0.46	4.2	0.70	0.201	0.165	0.625	0.018	0.166	4.0	8.2	A
072505	B 1	4.9	3.9	15.9	0.51	4.4	1.15	0.193	0.153	0.625	0.020	0.175	6.6	8.8	C
072605	B 1	5.0	3.9	15.9	0.56	5.0	1.58	0.197	0.153	0.625	0.022	0.198	9.0	9.0	C
072705	B 1	5.0	3.8	15.9	0.61	5.6	2.24	0.197	0.149	0.625	0.024	0.222	12.8	9.3	C
072805	B 1	5.1	3.7	15.9	0.71	6.6	4.13	0.201	0.145	0.625	0.028	0.259	23.6	9.3	C
B1-3137-2M	B 1	5.0	3.4	15.9	0.81	9.5	6.13	0.197	0.133	0.625	0.032	0.372	35.0	11.6	C
B1-3421-2M	B 1	5.1	4.3	17.5	0.42	3.9	0.46	0.201	0.168	0.689	0.016	0.154	2.6	8.4	A
B1-3424-2M	B 1	5.1	4.2	17.5	0.46	4.5	0.62	0.201	0.165	0.689	0.018	0.179	3.6	8.9	A
B1-3427-2M	B 1	4.9	3.9	17.5	0.51	5.3	0.92	0.193	0.153	0.689	0.020	0.209	5.3	10.4	C
B1-3429-2M	B 1	5.0	3.9	17.5	0.56	6.0	1.26	0.197	0.153	0.689	0.022	0.238	7.2	10.8	C
B1-3431-2M	B 1	5.0	3.8	17.5	0.61	7.0	1.73	0.197	0.149	0.689	0.024	0.274	9.9	11.4	C
B1-3434-2M	B 1	5.1	3.7	17.5	0.71	8.5	3.01	0.201	0.145	0.689	0.028	0.335	17.2	12.0	C

Choose from millions of sizes - www.flexosprings.com

Compression Springs




FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	Lbs/in	approx	
B1-3437-2M	B 1	5.0	3.4	17.5	0.81	10.3	5.50	0.197	0.133	0.689	0.032	0.407	31.4	12.7	C
B1-3621-2M	B 1	5.1	4.3	19.1	0.42	4.2	0.42	0.201	0.168	0.750	0.016	0.164	2.4	9.0	A
072406	B 1	5.1	4.2	19.1	0.46	4.8	0.57	0.201	0.165	0.750	0.018	0.191	3.2	9.6	A
072506	B 1	4.9	3.9	19.1	0.51	5.2	0.94	0.193	0.153	0.750	0.020	0.205	5.4	10.3	C
072606	B 1	5.0	3.9	19.1	0.56	5.7	1.34	0.197	0.153	0.750	0.022	0.226	7.6	10.3	C
072706	B 1	5.0	3.8	19.1	0.61	6.6	1.85	0.197	0.149	0.750	0.024	0.258	10.6	10.8	C
072806	B 1	5.1	3.7	19.1	0.71	7.6	3.42	0.201	0.145	0.750	0.028	0.301	19.6	10.8	C
B1-3637-2M	B 1	5.0	3.4	19.1	0.81	11.2	5.01	0.197	0.133	0.750	0.032	0.441	28.6	13.8	C
B1-3724-2M	B 1	5.0	4.1	20.0	0.46	5.2	0.56	0.197	0.161	0.787	0.018	0.203	3.2	10.3	A
M104104	B 1	5.0	4.0	20.0	0.51	6.5	0.68	0.197	0.157	0.787	0.020	0.255	3.9	12.8	C
M104304	B 1	5.0	3.9	20.0	0.56	7.7	0.94	0.197	0.153	0.787	0.022	0.303	5.4	13.8	C
M104504	B 1	5.0	3.7	20.0	0.63	9.1	1.50	0.197	0.147	0.787	0.025	0.360	8.5	14.5	C
M104604	B 1	5.0	3.7	20.0	0.67	9.7	1.97	0.197	0.144	0.787	0.026	0.382	11.2	14.5	C
072407	B 1	5.1	4.2	22.2	0.46	5.5	0.48	0.201	0.165	0.875	0.018	0.216	2.7	11.0	A
072507	B 1	4.9	3.9	22.2	0.51	6.0	0.80	0.193	0.153	0.875	0.020	0.235	4.6	11.8	C
072607	B 1	5.0	3.9	22.2	0.56	6.6	1.13	0.197	0.153	0.875	0.022	0.259	6.5	11.8	C
072707	B 1	5.0	3.8	22.2	0.61	7.5	1.58	0.197	0.149	0.875	0.024	0.294	9.0	12.3	C
072807	B 1	5.1	3.7	22.2	0.71	8.7	2.92	0.201	0.145	0.875	0.028	0.343	16.7	12.3	C
B1-3837-2M	B 1	5.0	3.4	22.2	0.81	12.9	4.24	0.197	0.133	0.875	0.032	0.509	24.2	15.9	C
B1-4024-2M	B 1	5.0	4.1	25.0	0.46	6.2	0.44	0.197	0.161	0.984	0.018	0.243	2.5	12.5	A
M104105	B 1	5.0	4.0	25.0	0.51	8.0	0.53	0.197	0.157	0.984	0.020	0.315	3.0	15.8	C
M104305	B 1	5.0	3.9	25.0	0.56	9.5	0.74	0.197	0.153	0.984	0.022	0.374	4.2	17.0	C
M104505	B 1	5.0	3.7	25.0	0.63	11.2	1.19	0.197	0.147	0.984	0.025	0.440	6.8	17.8	C
M104605	B 1	5.0	3.7	25.0	0.67	12.1	1.54	0.197	0.144	0.984	0.026	0.475	8.8	18.0	C
B1-4121-2M	B 1	5.1	4.3	25.4	0.42	5.2	0.31	0.201	0.168	1.000	0.016	0.205	1.8	11.5	A
072408	B 1	5.1	4.2	25.4	0.46	6.1	0.42	0.201	0.165	1.000	0.018	0.239	2.4	12.3	A
072508	B 1	4.9	3.9	25.4	0.51	6.7	0.69	0.193	0.153	1.000	0.020	0.265	4.0	13.3	C
072608	B 1	5.0	3.9	25.4	0.56	7.4	0.98	0.197	0.153	1.000	0.022	0.292	5.6	13.3	C
072708	B 1	5.0	3.8	25.4	0.61	8.2	1.41	0.197	0.149	1.000	0.024	0.324	8.1	13.5	C
072808	B 1	5.1	3.7	25.4	0.71	9.8	2.55	0.201	0.145	1.000	0.028	0.385	14.6	13.8	C
B1-4137-2M	B 1	5.0	3.4	25.4	0.81	14.7	3.68	0.197	0.133	1.000	0.032	0.578	21.0	18.1	C
B1-4324-2M	B 1	5.0	4.1	30.0	0.46	7.2	0.36	0.197	0.161	1.181	0.018	0.284	2.1	14.8	B
M104106	B 1	5.0	4.0	30.0	0.51	9.4	0.44	0.197	0.157	1.181	0.020	0.370	2.5	18.5	C
M104306	B 1	5.0	3.9	30.0	0.56	11.2	0.61	0.197	0.153	1.181	0.022	0.440	3.5	20.0	C
M104506	B 1	5.0	3.7	30.0	0.63	13.2	0.98	0.197	0.147	1.181	0.025	0.521	5.6	21.0	C
M104606	B 1	5.0	3.7	30.0	0.67	14.4	1.26	0.197	0.144	1.181	0.026	0.567	7.2	21.5	C
072410	B 1	5.1	4.2	31.8	0.46	7.3	0.33	0.201	0.165	1.250	0.018	0.288	1.9	15.0	B
072510	B 1	4.9	3.9	31.8	0.51	8.1	0.56	0.193	0.153	1.250	0.020	0.320	3.2	16.0	C
072610	B 1	5.0	3.9	31.8	0.56	9.1	0.78	0.197	0.153	1.250	0.022	0.358	4.4	16.3	C
072710	B 1	5.0	3.8	31.8	0.61	10.1	1.12	0.197	0.149	1.250	0.024	0.396	6.4	16.5	C
072810	B 1	5.1	3.7	31.8	0.71	11.9	2.03	0.201	0.145	1.250	0.028	0.469	11.6	16.8	C
M104107	B 1	5.0	4.0	35.0	0.51	10.9	0.37	0.197	0.157	1.378	0.020	0.430	2.1	21.5	C
M104307	B 1	5.0	3.9	35.0	0.56	12.9	0.53	0.197	0.153	1.378	0.022	0.506	3.0	23.0	C
M104507	B 1	5.0	3.7	35.0	0.63	15.3	0.84	0.197	0.147	1.378	0.025	0.601	4.8	24.3	C
M104607	B 1	5.0	3.7	35.0	0.67	16.6	1.08	0.197	0.144	1.378	0.026	0.653	6.2	24.8	C
072412	B 1	5.1	4.2	38.1	0.46	8.6	0.27	0.201	0.165	1.500	0.018	0.338	1.6	17.8	B
072512	B 1	4.9	3.9	38.1	0.51	9.5	0.47	0.193	0.153	1.500	0.020	0.375	2.7	18.8	C
072612	B 1	5.0	3.9	38.1	0.56	10.6	0.65	0.197	0.153	1.500	0.022	0.418	3.7	19.0	C
072712	B 1	5.0	3.8	38.1	0.61	11.9	0.93	0.197	0.149	1.500	0.024	0.468	5.3	19.5	C
072812	B 1	5.1	3.7	38.1	0.71	14.0	1.69	0.201	0.145	1.500	0.028	0.553	9.6	19.8	C
M104108	B 1	5.0	4.0	40.0	0.51	12.3	0.33	0.197	0.157	1.575	0.020	0.485	1.9	24.3	C

For Sales or Assistance - Tel 0117 967 3313

All characteristics are nominal

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	Lbs/in	approx	
M104308	B 1	5.0	3.9	40.0	0.56	14.7	0.46	0.197	0.153	1.575	0.022	0.578	2.6	26.3	C
M104508	B 1	5.0	3.7	40.0	0.63	17.5	0.73	0.197	0.147	1.575	0.025	0.688	4.1	27.8	C
M104608	B 1	5.0	3.7	40.0	0.67	18.9	0.94	0.197	0.144	1.575	0.026	0.745	5.4	28.3	C
072414	B 1	5.1	4.2	44.5	0.46	9.8	0.23	0.201	0.165	1.750	0.018	0.387	1.3	20.5	B
072514	B 1	4.9	3.9	44.5	0.51	11.0	0.39	0.193	0.153	1.750	0.020	0.435	2.3	21.8	C
072614	B 1	5.0	3.9	44.5	0.56	12.2	0.56	0.197	0.153	1.750	0.022	0.479	3.2	21.8	C
072714	B 1	5.0	3.8	44.5	0.61	13.7	0.79	0.197	0.149	1.750	0.024	0.540	4.5	22.5	C
072814	B 1	5.1	3.7	44.5	0.71	16.2	1.44	0.201	0.145	1.750	0.028	0.637	8.2	22.8	C
M104110	B 1	5.0	4.0	50.0	0.51	15.2	0.26	0.197	0.157	1.969	0.020	0.600	1.5	30.0	C
M104310	B 1	5.0	3.9	50.0	0.56	18.2	0.36	0.197	0.153	1.969	0.022	0.715	2.1	32.5	C
M104510	B 1	5.0	3.7	50.0	0.63	21.7	0.58	0.197	0.147	1.969	0.025	0.856	3.3	34.5	D
M104610	B 1	5.0	3.7	50.0	0.67	23.5	0.75	0.197	0.144	1.969	0.026	0.923	4.3	35.0	D
072416	B 1	5.1	4.2	50.8	0.46	11.1	0.20	0.201	0.165	2.000	0.018	0.435	1.2	23.2	B
072516	B 1	4.9	3.9	50.8	0.51	12.4	0.35	0.193	0.153	2.000	0.020	0.490	2.0	24.5	C
072616	B 1	5.0	3.9	50.8	0.56	13.8	0.49	0.197	0.153	2.000	0.022	0.545	2.8	24.8	C
072716	B 1	5.0	3.8	50.8	0.61	15.6	0.69	0.197	0.149	2.000	0.024	0.612	3.9	25.5	D
072816	B 1	5.1	3.7	50.8	0.71	18.3	1.26	0.201	0.145	2.000	0.028	0.721	7.2	25.8	D
B2-2327-2M	B 2	5.5	4.5	10.0	0.51	2.9	1.43	0.217	0.177	0.394	0.020	0.114	8.1	5.7	C
B2-2329-2M	B 2	5.5	4.4	10.0	0.56	3.4	1.99	0.217	0.173	0.394	0.022	0.133	11.4	6.0	C
B2-2332-2M	B 2	5.5	4.2	10.0	0.63	4.0	3.11	0.217	0.167	0.394	0.025	0.158	17.7	6.4	C
B2-2334-2M	B 2	5.5	4.1	10.0	0.71	4.8	4.86	0.217	0.161	0.394	0.028	0.189	27.7	6.7	C
B2-3027-2M	B 2	5.5	4.5	15.0	0.51	4.0	0.92	0.217	0.177	0.591	0.020	0.156	5.2	7.8	C
M114303	B 2	5.5	4.4	15.0	0.56	5.2	1.11	0.217	0.173	0.591	0.022	0.204	6.3	9.3	C
M114503	B 2	5.5	4.2	15.0	0.63	6.1	1.74	0.217	0.167	0.591	0.025	0.242	10.0	9.8	C
M114703	B 2	5.5	4.1	15.0	0.71	7.3	2.80	0.217	0.161	0.591	0.028	0.287	16.0	10.3	C
M114803	B 2	5.5	4.0	15.0	0.75	7.7	3.55	0.217	0.157	0.591	0.030	0.303	20.3	10.3	C
B2-3727-2M	B 2	5.5	4.5	20.0	0.51	5.0	0.67	0.217	0.177	0.787	0.020	0.197	3.9	9.9	C
M114304	B 2	5.5	4.4	20.0	0.56	6.7	0.80	0.217	0.173	0.787	0.022	0.264	4.6	12.0	C
M114504	B 2	5.5	4.2	20.0	0.63	8.0	1.26	0.217	0.167	0.787	0.025	0.316	7.2	12.8	C
M114704	B 2	5.5	4.1	20.0	0.71	9.4	2.05	0.217	0.161	0.787	0.028	0.371	11.7	13.3	C
M114804	B 2	5.5	4.0	20.0	0.75	10.1	2.54	0.217	0.157	0.787	0.030	0.399	14.5	13.5	C
B2-4027-2M	B 2	5.5	4.5	25.0	0.51	6.1	0.53	0.217	0.177	0.984	0.020	0.239	3.0	11.9	C
M114305	B 2	5.5	4.4	25.0	0.56	8.1	0.64	0.217	0.173	0.984	0.022	0.319	3.7	14.5	C
M114505	B 2	5.5	4.2	25.0	0.63	9.8	1.00	0.217	0.167	0.984	0.025	0.384	5.7	15.5	C
M114705	B 2	5.5	4.1	25.0	0.71	11.6	1.62	0.217	0.161	0.984	0.028	0.455	9.2	16.3	C
M114805	B 2	5.5	4.0	25.0	0.75	12.4	2.02	0.217	0.157	0.984	0.030	0.487	11.5	16.5	C
B2-4327-2M	B 2	5.5	4.5	30.0	0.51	7.1	0.44	0.217	0.177	1.181	0.020	0.280	2.5	14.0	C
M114306	B 2	5.5	4.4	30.0	0.56	9.6	0.53	0.217	0.173	1.181	0.022	0.380	3.0	17.3	C
M114506	B 2	5.5	4.2	30.0	0.63	11.7	0.82	0.217	0.167	1.181	0.025	0.459	4.7	18.5	C
M114706	B 2	5.5	4.1	30.0	0.71	13.9	1.32	0.217	0.161	1.181	0.028	0.546	7.5	19.5	C
M114806	B 2	5.5	4.0	30.0	0.75	14.8	1.65	0.217	0.157	1.181	0.030	0.583	9.4	19.8	C
M114307	B 2	5.5	4.4	35.0	0.56	11.2	0.45	0.217	0.173	1.378	0.022	0.440	2.5	20.0	C
M114507	B 2	5.5	4.2	35.0	0.63	13.4	0.70	0.217	0.167	1.378	0.025	0.527	4.0	21.3	C
M114707	B 2	5.5	4.1	35.0	0.71	16.0	1.13	0.217	0.161	1.378	0.028	0.630	6.4	22.5	C
M114807	B 2	5.5	4.0	35.0	0.75	17.1	1.41	0.217	0.157	1.378	0.030	0.672	8.1	22.8	C
M114308	B 2	5.5	4.4	40.0	0.56	12.6	0.39	0.217	0.173	1.575	0.022	0.495	2.2	22.5	C
M114508	B 2	5.5	4.2	40.0	0.63	15.3	0.61	0.217	0.167	1.575	0.025	0.601	3.5	24.3	C
M114708	B 2	5.5	4.1	40.0	0.71	18.1	0.98	0.217	0.161	1.575	0.028	0.714	5.6	25.5	C
M114808	B 2	5.5	4.0	40.0	0.75	19.5	1.22	0.217	0.157	1.575	0.030	0.768	7.0	26.0	C
M114310	B 2	5.5	4.4	50.0	0.56	15.5	0.31	0.217	0.173	1.969	0.022	0.611	1.8	27.8	C
M114510	B 2	5.5	4.2	50.0	0.63	18.9	0.48	0.217	0.167	1.969	0.025	0.744	2.8	30.0	D

Choose from millions of sizes - www.flexosprings.com

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	lbs/in		
M114710	B 2	5.5	4.1	50.0	0.71	22.6	0.78	0.217	0.161	1.969	0.028	0.889	4.4	31.8	D
M114810	B 2	5.5	4.0	50.0	0.75	24.2	0.97	0.217	0.157	1.969	0.030	0.952	5.5	32.3	D
M114312	B 2	5.5	4.4	60.0	0.56	18.6	0.26	0.217	0.173	2.362	0.022	0.732	1.5	33.3	D
M114512	B 2	5.5	4.2	60.0	0.63	22.4	0.40	0.217	0.167	2.362	0.025	0.881	2.3	35.5	D
M114712	B 2	5.5	4.1	60.0	0.71	26.8	0.65	0.217	0.161	2.362	0.028	1.057	3.7	37.8	D
M114812	B 2	5.5	4.0	60.0	0.75	28.9	0.80	0.217	0.157	2.362	0.030	1.137	4.6	38.5	D
B3-1924-2M	B 3	5.8	4.9	8.0	0.46	2.4	1.27	0.228	0.192	0.315	0.018	0.094	7.3	4.2	A
B3-1927-2M	B 3	5.7	4.7	8.0	0.51	2.4	1.74	0.224	0.184	0.315	0.020	0.094	9.9	4.7	B
B3-1929-2M	B 3	5.7	4.6	8.0	0.56	2.8	2.43	0.224	0.180	0.315	0.022	0.109	13.9	4.9	C
B3-1931-2M	B 3	5.8	4.6	8.0	0.61	3.1	3.22	0.228	0.180	0.315	0.024	0.121	18.4	5.0	C
B3-1934-2M	B 3	5.9	4.5	8.0	0.71	3.7	5.56	0.232	0.176	0.315	0.028	0.147	31.8	5.3	C
B3-1937-2M	B 3	5.6	4.0	8.0	0.81	4.6	10.63	0.220	0.156	0.315	0.032	0.183	60.7	5.7	C
B3-1940-2M	B 3	5.7	3.9	8.0	0.91	5.2	17.13	0.224	0.152	0.315	0.036	0.205	97.8	5.7	C
B3-1943-2M	B 3	5.8	3.8	8.0	1.02	5.7	26.94	0.228	0.148	0.315	0.040	0.223	153.8	5.6	C
B3-2224-2M	B 3	5.8	4.9	9.5	0.46	2.6	1.03	0.228	0.192	0.375	0.018	0.103	5.9	4.7	A
082503	B 3	5.7	4.7	9.5	0.51	2.7	1.45	0.224	0.184	0.375	0.020	0.105	8.3	5.3	B
082603	B 3	5.7	4.6	9.5	0.56	3.0	2.10	0.224	0.180	0.375	0.022	0.119	12.0	5.4	C
082703	B 3	5.8	4.6	9.5	0.61	3.2	3.02	0.228	0.180	0.375	0.024	0.126	17.2	5.3	C
082803	B 3	5.9	4.5	9.5	0.71	3.9	5.18	0.232	0.176	0.375	0.028	0.154	29.6	5.5	C
082903	B 3	5.6	4.0	9.5	0.81	4.9	9.87	0.220	0.156	0.375	0.032	0.192	56.4	6.0	C
083003	B 3	5.7	3.9	9.5	0.91	5.7	14.85	0.224	0.152	0.375	0.036	0.225	84.8	6.3	C
083103	B 3	5.8	3.8	9.5	1.02	6.6	21.44	0.228	0.148	0.375	0.040	0.260	122.4	6.5	C
B3-2327-2M	B 3	6.0	5.0	10.0	0.51	2.6	1.26	0.236	0.196	0.394	0.020	0.103	7.2	5.2	C
B3-2329-2M	B 3	6.0	4.9	10.0	0.56	3.0	1.74	0.236	0.192	0.394	0.022	0.120	10.0	5.4	C
B3-2331-2M	B 3	6.0	4.8	10.0	0.61	3.5	2.36	0.236	0.188	0.394	0.024	0.137	13.5	5.7	C
B3-2724-2M	B 3	5.8	4.9	12.7	0.46	3.1	0.74	0.228	0.192	0.500	0.018	0.122	4.3	5.8	A
082504	B 3	5.7	4.7	12.7	0.51	3.3	1.05	0.224	0.184	0.500	0.020	0.130	6.0	6.5	C
082604	B 3	5.7	4.6	12.7	0.56	3.7	1.52	0.224	0.180	0.500	0.022	0.147	8.7	6.7	C
082704	B 3	5.8	4.6	12.7	0.61	4.0	2.18	0.228	0.180	0.500	0.024	0.156	12.5	6.5	C
082804	B 3	5.9	4.5	12.7	0.71	4.8	3.82	0.232	0.176	0.500	0.028	0.189	21.8	6.8	C
082904	B 3	5.6	4.0	12.7	0.81	6.1	7.18	0.220	0.156	0.500	0.032	0.240	41.0	7.5	C
083004	B 3	5.7	3.9	12.7	0.91	7.1	10.97	0.224	0.152	0.500	0.036	0.279	62.7	7.8	C
083104	B 3	5.8	3.8	12.7	1.02	7.9	16.78	0.228	0.148	0.500	0.040	0.310	95.8	7.8	C
B3-3029-2M	B 3	6.0	4.9	15.0	0.56	4.1	1.12	0.236	0.192	0.591	0.022	0.163	6.4	7.4	C
M124503	B 3	6.0	4.7	15.0	0.63	5.5	1.49	0.236	0.187	0.591	0.025	0.217	8.5	8.8	C
M124703	B 3	6.0	4.6	15.0	0.71	6.6	2.36	0.236	0.180	0.591	0.028	0.259	13.5	9.3	C
M124903	B 3	6.0	4.4	15.0	0.81	7.7	4.14	0.236	0.172	0.591	0.032	0.304	23.6	9.5	C
M125003	B 3	6.0	4.3	15.0	0.85	8.3	4.89	0.236	0.169	0.591	0.033	0.326	27.9	9.8	C
B3-3124-2M	B 3	5.8	4.9	15.9	0.46	3.6	0.58	0.228	0.192	0.625	0.018	0.142	3.3	6.9	A
082505	B 3	5.7	4.7	15.9	0.51	3.9	0.82	0.224	0.184	0.625	0.020	0.155	4.7	7.8	C
082605	B 3	5.7	4.6	15.9	0.56	4.5	1.19	0.224	0.180	0.625	0.022	0.176	6.8	8.0	C
082705	B 3	5.8	4.6	15.9	0.61	4.7	1.71	0.228	0.180	0.625	0.024	0.186	9.7	7.8	C
082805	B 3	5.9	4.5	15.9	0.71	5.7	3.02	0.232	0.176	0.625	0.028	0.224	17.3	8.0	C
082905	B 3	5.6	4.0	15.9	0.81	7.1	5.85	0.220	0.156	0.625	0.032	0.280	33.4	8.8	C
083005	B 3	5.7	3.9	15.9	0.91	8.5	8.70	0.224	0.152	0.625	0.036	0.333	49.7	9.3	C
083105	B 3	5.8	3.8	15.9	1.02	9.7	12.86	0.228	0.148	0.625	0.040	0.380	73.4	9.5	C
B3-3424-2M	B 3	5.8	4.9	17.5	0.46	3.8	0.52	0.228	0.192	0.689	0.018	0.151	3.0	7.4	A
B3-3427-2M	B 3	5.7	4.7	17.5	0.51	4.3	0.74	0.224	0.184	0.689	0.020	0.168	4.2	8.4	C
B3-3429-2M	B 3	5.7	4.6	17.5	0.56	5.0	1.02	0.224	0.180	0.689	0.022	0.198	5.8	9.0	C
B3-3431-2M	B 3	5.8	4.6	17.5	0.61	5.7	1.34	0.228	0.180	0.689	0.024	0.224	7.7	9.3	C
B3-3434-2M	B 3	5.9	4.5	17.5	0.71	7.1	2.28	0.232	0.176	0.689	0.028	0.279	13.0	10.0	C

For Sales or Assistance - Tel 0117 967 3313

All characteristics are nominal

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Cells	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	lbs/in	approx	
B3-3437-2M	B 3	5.6	4.0	17.5	0.81	9.1	4.27	0.220	0.156	0.689	0.032	0.360	24.4	11.2	C
B3-3440-2M	B 3	5.7	3.9	17.5	0.91	10.4	6.75	0.224	0.152	0.689	0.036	0.409	38.5	11.4	C
B3-3443-2M	B 3	5.8	3.8	17.5	1.02	11.5	10.39	0.228	0.148	0.689	0.040	0.451	59.3	11.3	C
B3-3624-2M	B 3	5.8	4.9	19.1	0.46	4.1	0.48	0.228	0.192	0.750	0.018	0.161	2.7	7.9	A
082506	B 3	5.7	4.7	19.1	0.51	4.4	0.70	0.224	0.184	0.750	0.020	0.175	4.0	8.8	C
082606	B 3	5.7	4.6	19.1	0.56	5.1	0.99	0.224	0.180	0.750	0.022	0.202	5.6	9.2	C
082706	B 3	5.8	4.6	19.1	0.61	5.5	1.40	0.228	0.180	0.750	0.024	0.216	8.0	9.0	C
082806	B 3	5.9	4.5	19.1	0.71	6.6	2.50	0.232	0.176	0.750	0.028	0.259	14.3	9.3	C
082906	B 3	5.6	4.0	19.1	0.81	8.3	4.79	0.220	0.156	0.750	0.032	0.328	27.3	10.3	C
083006	B 3	5.7	3.9	19.1	0.91	9.8	7.21	0.224	0.152	0.750	0.036	0.387	41.2	10.8	C
083106	B 3	5.8	3.8	19.1	1.02	11.4	10.43	0.228	0.148	0.750	0.040	0.450	59.5	11.3	C
B3-3729-2M	B 3	6.0	4.9	20.0	0.56	5.2	0.82	0.236	0.192	0.787	0.022	0.205	4.7	9.3	C
M124504	B 3	6.0	4.7	20.0	0.63	7.1	1.09	0.236	0.187	0.787	0.025	0.279	6.2	11.3	C
M124704	B 3	6.0	4.6	20.0	0.71	8.5	1.71	0.236	0.180	0.787	0.028	0.336	9.8	12.0	C
M124904	B 3	6.0	4.4	20.0	0.81	10.2	2.96	0.236	0.172	0.787	0.032	0.400	16.9	12.5	C
M125004	B 3	6.0	4.3	20.0	0.85	10.8	3.52	0.236	0.169	0.787	0.033	0.427	20.1	12.8	C
B3-3824-2M	B 3	5.8	4.9	22.2	0.46	4.6	0.40	0.228	0.192	0.875	0.018	0.180	2.3	9.0	A
082507	B 3	5.7	4.7	22.2	0.51	5.1	0.59	0.224	0.184	0.875	0.020	0.200	3.4	10.0	C
082607	B 3	5.7	4.6	22.2	0.56	5.9	0.84	0.224	0.180	0.875	0.022	0.231	4.8	10.5	C
082707	B 3	5.8	4.6	22.2	0.61	6.3	1.19	0.228	0.180	0.875	0.024	0.246	6.8	10.3	C
082807	B 3	5.9	4.5	22.2	0.71	7.5	2.13	0.232	0.176	0.875	0.028	0.294	12.2	10.5	C
082907	B 3	5.6	4.0	22.2	0.81	9.6	4.05	0.220	0.156	0.875	0.032	0.376	23.1	11.8	C
083007	B 3	5.7	3.9	22.2	0.91	11.2	6.16	0.224	0.152	0.875	0.036	0.441	35.2	12.3	C
083107	B 3	5.8	3.8	22.2	1.02	13.0	8.97	0.228	0.148	0.875	0.040	0.510	51.2	12.8	C
B3-4029-2M	B 3	6.0	4.9	25.0	0.56	6.3	0.65	0.236	0.192	0.984	0.022	0.248	3.7	11.3	C
M124505	B 3	6.0	4.7	25.0	0.63	8.7	0.86	0.236	0.187	0.984	0.025	0.341	4.9	13.8	C
M124705	B 3	6.0	4.6	25.0	0.71	10.5	1.34	0.236	0.180	0.984	0.028	0.413	7.7	14.8	C
M124905	B 3	6.0	4.4	25.0	0.81	12.4	2.34	0.236	0.172	0.984	0.032	0.488	13.4	15.3	C
M125005	B 3	6.0	4.3	25.0	0.85	13.2	2.81	0.236	0.169	0.984	0.033	0.519	16.0	15.5	C
B3-4124-2M	B 3	5.8	4.9	25.4	0.46	5.1	0.35	0.228	0.192	1.000	0.018	0.199	2.0	10.1	A
082508	B 3	5.7	4.7	25.4	0.51	5.7	0.51	0.224	0.184	1.000	0.020	0.225	2.9	11.3	C
082608	B 3	5.7	4.6	25.4	0.56	6.5	0.74	0.224	0.180	1.000	0.022	0.255	4.2	11.6	C
082708	B 3	5.8	4.6	25.4	0.61	6.9	1.06	0.228	0.180	1.000	0.024	0.270	6.1	11.3	C
082808	B 3	5.9	4.5	25.4	0.71	8.4	1.86	0.232	0.176	1.000	0.028	0.329	10.6	11.8	C
082908	B 3	5.6	4.0	25.4	0.81	10.8	3.51	0.220	0.156	1.000	0.032	0.424	20.0	13.3	C
083008	B 3	5.7	3.9	25.4	0.91	12.8	5.26	0.224	0.152	1.000	0.036	0.504	30.0	14.0	C
083108	B 3	5.8	3.8	25.4	1.02	14.5	7.87	0.228	0.148	1.000	0.040	0.570	45.0	14.3	C
B3-4224-2M	B 3	5.8	4.9	27.5	0.46	5.4	0.32	0.228	0.192	1.083	0.018	0.212	1.8	10.8	A
B3-4227-2M	B 3	5.7	4.7	27.5	0.51	6.2	0.46	0.224	0.184	1.083	0.020	0.245	2.6	12.3	C
B3-4229-2M	B 3	5.7	4.6	27.5	0.56	7.4	0.63	0.224	0.180	1.083	0.022	0.291	3.6	13.2	C
B3-4231-2M	B 3	5.8	4.6	27.5	0.61	8.4	0.83	0.228	0.180	1.083	0.024	0.332	4.7	13.8	C
B3-4234-2M	B 3	5.9	4.5	27.5	0.71	10.6	1.40	0.232	0.176	1.083	0.028	0.418	8.0	14.9	C
B3-4237-2M	B 3	5.6	4.0	27.5	0.81	13.9	2.62	0.220	0.156	1.083	0.032	0.546	15.0	17.1	C
B3-4240-2M	B 3	5.7	3.9	27.5	0.91	15.8	4.12	0.224	0.152	1.083	0.036	0.623	23.5	17.3	C
B3-4243-2M	B 3	5.8	3.8	27.5	1.02	17.6	6.31	0.228	0.148	1.083	0.040	0.691	36.0	17.3	C
B3-4329-2M	B 3	6.0	4.9	30.0	0.56	7.4	0.54	0.236	0.192	1.181	0.022	0.291	3.1	13.2	C
M124506	B 3	6.0	4.7	30.0	0.63	10.2	0.71	0.236	0.187	1.181	0.025	0.403	4.0	16.3	C
M124706	B 3	6.0	4.6	30.0	0.71	12.3	1.12	0.236	0.180	1.181	0.028	0.483	6.4	17.3	C
M124906	B 3	6.0	4.4	30.0	0.81	14.8	1.91	0.236	0.172	1.181	0.032	0.584	10.9	18.3	C
M125006	B 3	6.0	4.3	30.0	0.85	15.7	2.30	0.236	0.169	1.181	0.033	0.619	13.1	18.5	C
B3-4424-2M	B 3	5.8	4.9	31.8	0.46	6.0	0.28	0.228	0.192	1.250	0.018	0.238	1.6	12.2	B

Choose from millions of sizes - www.flexosprings.com

Compression Springs




FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	Lbs/in	approx	
082510	B 3	5.7	4.7	31.8	0.51	6.9	0.41	0.224	0.184	1.250	0.020	0.270	2.3	13.5	C
082610	B 3	5.7	4.6	31.8	0.56	7.7	0.60	0.224	0.180	1.250	0.022	0.304	3.4	13.8	C
082710	B 3	5.8	4.6	31.8	0.61	8.4	0.84	0.228	0.180	1.250	0.024	0.330	4.8	13.8	C
082810	B 3	5.9	4.5	31.8	0.71	10.1	1.48	0.232	0.176	1.250	0.028	0.399	8.5	14.3	C
082910	B 3	5.6	4.0	31.8	0.81	13.0	2.82	0.220	0.156	1.250	0.032	0.512	16.1	16.0	C
083010	B 3	5.7	3.9	31.8	0.91	15.5	4.21	0.224	0.152	1.250	0.036	0.612	24.0	17.0	C
083110	B 3	5.8	3.8	31.8	1.02	17.8	6.22	0.228	0.148	1.250	0.040	0.700	35.5	17.5	D
M124507	B 3	6.0	4.7	35.0	0.63	11.8	0.60	0.236	0.187	1.378	0.025	0.465	3.4	18.8	C
M124707	B 3	6.0	4.6	35.0	0.71	14.2	0.95	0.236	0.180	1.378	0.028	0.560	5.4	20.0	C
M124907	B 3	6.0	4.4	35.0	0.81	17.1	1.63	0.236	0.172	1.378	0.032	0.672	9.3	21.0	C
M125007	B 3	6.0	4.3	35.0	0.85	18.3	1.94	0.236	0.169	1.378	0.033	0.719	11.1	21.5	C
B3-4624-2M	B 3	5.8	4.9	38.1	0.46	7.0	0.23	0.228	0.192	1.500	0.018	0.276	1.3	14.3	B
082512	B 3	5.7	4.7	38.1	0.51	8.0	0.34	0.224	0.184	1.500	0.020	0.315	2.0	15.8	C
082612	B 3	5.7	4.6	38.1	0.56	9.2	0.49	0.224	0.180	1.500	0.022	0.361	2.8	16.4	C
082712	B 3	5.8	4.6	38.1	0.61	9.9	0.69	0.228	0.180	1.500	0.024	0.390	3.9	16.3	C
082812	B 3	5.9	4.5	38.1	0.71	11.9	1.23	0.232	0.176	1.500	0.028	0.469	7.0	16.8	C
082912	B 3	5.6	4.0	38.1	0.81	15.4	2.32	0.220	0.156	1.500	0.032	0.608	13.3	19.0	C
083012	B 3	5.7	3.9	38.1	0.91	18.3	3.51	0.224	0.152	1.500	0.036	0.720	20.0	20.0	C
083112	B 3	5.8	3.8	38.1	1.02	21.1	5.14	0.228	0.148	1.500	0.040	0.830	29.4	20.8	D
M124508	B 3	6.0	4.7	40.0	0.63	13.4	0.52	0.236	0.187	1.575	0.025	0.527	3.0	21.3	C
M124708	B 3	6.0	4.6	40.0	0.71	16.2	0.83	0.236	0.180	1.575	0.028	0.637	4.7	22.8	C
M124908	B 3	6.0	4.4	40.0	0.81	19.3	1.43	0.236	0.172	1.575	0.032	0.760	8.1	23.8	C
M125008	B 3	6.0	4.3	40.0	0.85	20.6	1.70	0.236	0.169	1.575	0.033	0.812	9.7	24.3	D
082514	B 3	5.7	4.7	44.5	0.51	9.3	0.29	0.224	0.184	1.750	0.020	0.365	1.7	18.3	C
082614	B 3	5.7	4.6	44.5	0.56	10.6	0.42	0.224	0.180	1.750	0.022	0.418	2.4	19.0	C
082714	B 3	5.8	4.6	44.5	0.61	11.4	0.59	0.228	0.180	1.750	0.024	0.450	3.3	18.8	C
082814	B 3	5.9	4.5	44.5	0.71	13.7	1.05	0.232	0.176	1.750	0.028	0.539	6.0	19.3	C
082914	B 3	5.6	4.0	44.5	0.81	17.9	1.97	0.220	0.156	1.750	0.032	0.704	11.3	22.0	C
083014	B 3	5.7	3.9	44.5	0.91	21.3	2.97	0.224	0.152	1.750	0.036	0.837	17.0	23.3	D
083114	B 3	5.8	3.8	44.5	1.02	24.4	4.38	0.228	0.148	1.750	0.040	0.960	25.0	24.0	D
M124510	B 3	6.0	4.7	50.0	0.63	16.5	0.42	0.236	0.187	1.969	0.025	0.651	2.4	26.3	D
M124710	B 3	6.0	4.6	50.0	0.71	20.1	0.65	0.236	0.180	1.969	0.028	0.791	3.7	28.3	D
M124910	B 3	6.0	4.4	50.0	0.81	24.0	1.13	0.236	0.172	1.969	0.032	0.944	6.4	29.5	D
M125010	B 3	6.0	4.3	50.0	0.85	25.7	1.34	0.236	0.169	1.969	0.033	1.012	7.7	30.3	D
082516	B 3	5.7	4.7	50.8	0.51	10.4	0.25	0.224	0.184	2.000	0.020	0.410	1.5	20.5	C
082616	B 3	5.7	4.6	50.8	0.56	11.9	0.37	0.224	0.180	2.000	0.022	0.469	2.1	21.3	C
082716	B 3	5.8	4.6	50.8	0.61	12.8	0.52	0.228	0.180	2.000	0.024	0.504	3.0	21.0	D
082816	B 3	5.9	4.5	50.8	0.71	15.5	0.92	0.232	0.176	2.000	0.028	0.609	5.2	21.8	D
082916	B 3	5.6	4.0	50.8	0.81	20.1	1.74	0.220	0.156	2.000	0.032	0.792	9.9	24.8	D
083016	B 3	5.7	3.9	50.8	0.91	24.0	2.60	0.224	0.152	2.000	0.036	0.945	14.9	26.3	D
083116	B 3	5.8	3.8	50.8	1.02	27.7	3.82	0.228	0.148	2.000	0.040	1.090	21.8	27.3	D
M124512	B 3	6.0	4.7	60.0	0.63	19.7	0.34	0.236	0.187	2.362	0.025	0.775	2.0	31.3	D
M124712	B 3	6.0	4.6	60.0	0.71	24.0	0.54	0.236	0.180	2.362	0.028	0.945	3.1	33.8	D
M124912	B 3	6.0	4.4	60.0	0.81	28.7	0.93	0.236	0.172	2.362	0.032	1.128	5.3	35.3	D
M125012	B 3	6.0	4.3	60.0	0.85	30.6	1.11	0.236	0.169	2.362	0.033	1.205	6.4	36.0	D
082520	B 3	5.7	4.7	63.5	0.51	12.8	0.20	0.224	0.184	2.500	0.020	0.505	1.2	25.3	D
082620	B 3	5.7	4.6	63.5	0.56	14.6	0.29	0.224	0.180	2.500	0.022	0.577	1.7	26.2	D
082720	B 3	5.8	4.6	63.5	0.61	15.9	0.41	0.228	0.180	2.500	0.024	0.624	2.3	26.0	D
082820	B 3	5.9	4.5	63.5	0.71	19.2	0.73	0.232	0.176	2.500	0.028	0.756	4.1	27.0	D
082920	B 3	5.6	4.0	63.5	0.81	25.2	1.36	0.220	0.156	2.500	0.032	0.992	7.8	31.0	D
083020	B 3	5.7	3.9	63.5	0.91	29.7	2.07	0.224	0.152	2.500	0.036	1.169	11.8	32.5	D

For Sales or Assistance - Tel 0117 967 3313

All characteristics are nominal

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	Inches	Inches	Inches	Inches	Inches	Lbs/in	approx	
083120	B 3	5.8	3.8	63.5	1.02	34.0	3.06	0.228	0.148	2.500	0.040	1.340	17.5	33.5	D
B4-1929-2M	B 4	6.5	5.4	8.0	0.56	2.4	2.01	0.256	0.212	0.315	0.022	0.095	11.5	4.3	C
B4-1931-2M	B 4	6.6	5.4	8.0	0.61	2.7	2.64	0.260	0.212	0.315	0.024	0.106	15.1	4.4	C
B4-1934-2M	B 4	6.7	5.3	8.0	0.71	3.3	4.47	0.264	0.208	0.315	0.028	0.130	25.5	4.6	C
B4-1937-2M	B 4	6.4	4.8	8.0	0.81	4.1	8.13	0.252	0.188	0.315	0.032	0.162	46.4	5.1	C
B4-2227-2M	B 4	6.5	5.5	9.5	0.51	2.3	1.19	0.256	0.216	0.375	0.020	0.091	6.8	4.6	B
B4-2229-2M	B 4	6.5	5.4	9.5	0.56	2.7	1.64	0.256	0.212	0.375	0.022	0.106	9.4	4.8	C
092703	B 4	6.6	5.4	9.5	0.61	2.9	2.32	0.260	0.212	0.375	0.024	0.114	13.3	4.8	C
092803	B 4	6.7	5.3	9.5	0.71	3.6	3.93	0.264	0.208	0.375	0.028	0.140	22.4	5.0	C
092903	B 4	6.4	4.8	9.5	0.81	4.3	7.64	0.252	0.188	0.375	0.032	0.168	43.6	5.3	C
093003	B 4	6.5	4.7	9.5	0.91	5.0	11.34	0.256	0.184	0.375	0.036	0.198	64.7	5.5	C
093103	B 4	6.6	4.6	9.5	1.02	5.6	17.33	0.260	0.180	0.375	0.040	0.220	99.0	5.5	C
B4-2727-2M	B 4	6.5	5.5	12.7	0.51	2.8	0.87	0.256	0.216	0.500	0.020	0.111	5.0	5.5	C
B4-2729-2M	B 4	6.5	5.4	12.7	0.56	3.3	1.19	0.256	0.212	0.500	0.022	0.129	6.8	5.9	C
092704	B 4	6.6	5.4	12.7	0.61	3.5	1.70	0.260	0.212	0.500	0.024	0.138	9.7	5.8	C
092804	B 4	6.7	5.3	12.7	0.71	4.3	2.95	0.264	0.208	0.500	0.028	0.168	16.8	6.0	C
092904	B 4	6.4	4.8	12.7	0.81	5.3	5.52	0.252	0.188	0.500	0.032	0.208	31.5	6.5	C
093004	B 4	6.5	4.7	12.7	0.91	6.2	8.36	0.256	0.184	0.500	0.036	0.243	47.7	6.8	C
093104	B 4	6.6	4.6	12.7	1.02	6.9	12.77	0.260	0.180	0.500	0.040	0.270	72.9	6.8	C
B4-3127-2M	B 4	6.5	5.5	15.9	0.51	3.3	0.68	0.256	0.216	0.625	0.020	0.130	3.9	6.5	C
B4-3129-2M	B 4	6.5	5.4	15.9	0.56	3.9	0.94	0.256	0.212	0.625	0.022	0.153	5.3	6.9	C
092705	B 4	6.6	5.4	15.9	0.61	4.3	1.28	0.260	0.212	0.625	0.024	0.168	7.3	7.0	C
092805	B 4	6.7	5.3	15.9	0.71	5.0	2.36	0.264	0.208	0.625	0.028	0.196	13.5	7.0	C
092905	B 4	6.4	4.8	15.9	0.81	6.3	4.32	0.252	0.188	0.625	0.032	0.248	24.7	7.8	C
093005	B 4	6.5	4.7	15.9	0.91	7.3	6.61	0.256	0.184	0.625	0.036	0.288	37.8	8.0	C
093105	B 4	6.6	4.6	15.9	1.02	8.4	9.71	0.260	0.180	0.625	0.040	0.330	55.4	8.3	C
B4-3427-2M	B 4	6.5	5.5	17.5	0.51	3.5	0.62	0.256	0.216	0.689	0.020	0.139	3.5	7.0	C
B4-3429-2M	B 4	6.5	5.4	17.5	0.56	4.2	0.84	0.256	0.212	0.689	0.022	0.164	4.8	7.5	C
B4-3431-2M	B 4	6.6	5.4	17.5	0.61	4.8	1.10	0.260	0.212	0.689	0.024	0.187	6.3	7.8	C
B4-3434-2M	B 4	6.7	5.3	17.5	0.71	6.0	1.83	0.264	0.208	0.689	0.028	0.236	10.4	8.4	C
B4-3437-2M	B 4	6.4	4.8	17.5	0.81	7.8	3.26	0.252	0.188	0.689	0.032	0.308	18.6	9.6	C
B4-3440-2M	B 4	6.5	4.7	17.5	0.91	9.0	5.04	0.256	0.184	0.689	0.036	0.355	28.8	9.9	C
B4-3443-2M	B 4	6.6	4.6	17.5	1.02	10.1	7.62	0.260	0.180	0.689	0.040	0.399	43.5	10.0	C
B4-3627-2M	B 4	6.5	5.5	19.1	0.51	3.8	0.56	0.256	0.216	0.750	0.020	0.149	3.2	7.4	C
B4-3629-2M	B 4	6.5	5.4	19.1	0.56	4.5	0.77	0.256	0.212	0.750	0.022	0.176	4.4	8.0	C
092706	B 4	6.6	5.4	19.1	0.61	4.9	1.06	0.260	0.212	0.750	0.024	0.192	6.1	8.0	C
092806	B 4	6.7	5.3	19.1	0.71	5.9	1.89	0.264	0.208	0.750	0.028	0.231	10.8	8.3	C
092906	B 4	6.4	4.8	19.1	0.81	7.3	3.55	0.252	0.188	0.750	0.032	0.288	20.3	9.0	C
093006	B 4	6.5	4.7	19.1	0.91	8.5	5.47	0.256	0.184	0.750	0.036	0.333	31.3	9.3	C
093106	B 4	6.6	4.6	19.1	1.02	9.7	8.09	0.260	0.180	0.750	0.040	0.380	46.2	9.5	C
B4-3827-2M	B 4	6.5	5.5	22.2	0.51	4.3	0.48	0.256	0.216	0.875	0.020	0.168	2.7	8.4	C
B4-3829-2M	B 4	6.5	5.4	22.2	0.56	5.1	0.65	0.256	0.212	0.875	0.022	0.199	3.7	9.1	C
092707	B 4	6.6	5.4	22.2	0.61	5.5	0.91	0.260	0.212	0.875	0.024	0.216	5.2	9.0	C
092807	B 4	6.7	5.3	22.2	0.71	6.6	1.63	0.264	0.208	0.875	0.028	0.259	9.3	9.3	C
092907	B 4	6.4	4.8	22.2	0.81	8.3	3.01	0.252	0.188	0.875	0.032	0.328	17.2	10.3	C
093007	B 4	6.5	4.7	22.2	0.91	9.6	4.67	0.256	0.184	0.875	0.036	0.378	26.7	10.5	C
093107	B 4	6.6	4.6	22.2	1.02	10.9	6.93	0.260	0.180	0.875	0.040	0.430	39.6	10.8	C
B4-4127-2M	B 4	6.5	5.5	25.4	0.51	4.8	0.42	0.256	0.216	1.000	0.020	0.187	2.4	9.4	C
B4-4129-2M	B 4	6.5	5.4	25.4	0.56	5.7	0.57	0.256	0.212	1.000	0.022	0.223	3.2	10.1	C
092708	B 4	6.6	5.4	25.4	0.61	6.1	0.80	0.260	0.212	1.000	0.024	0.240	4.6	10.0	C
092808	B 4	6.7	5.3	25.4	0.71	7.3	1.43	0.264	0.208	1.000	0.028	0.287	8.2	10.3	C

Choose from millions of sizes - www.flexosprings.com

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	Lbs/in	approx.	
092908	B 4	6.4	4.8	25.4	0.81	9.1	2.68	0.252	0.188	1.000	0.032	0.360	15.3	11.3	C
093008	B 4	6.5	4.7	25.4	0.91	10.7	4.07	0.256	0.184	1.000	0.036	0.423	23.2	11.8	C
093108	B 4	6.6	4.6	25.4	1.02	12.2	6.07	0.260	0.180	1.000	0.040	0.480	34.6	12.0	C
B4-4227-2M	B 4	6.5	5.5	27.5	0.51	5.1	0.38	0.256	0.216	1.083	0.020	0.200	2.2	10.0	C
B4-4229-2M	B 4	6.5	5.4	27.5	0.56	6.0	0.52	0.256	0.212	1.083	0.022	0.238	3.0	10.8	C
B4-4231-2M	B 4	6.6	5.4	27.5	0.61	6.9	0.68	0.260	0.212	1.083	0.024	0.273	3.9	11.4	C
B4-4234-2M	B 4	6.7	5.3	27.5	0.71	8.9	1.13	0.264	0.208	1.083	0.028	0.349	6.4	12.5	C
B4-4237-2M	B 4	6.4	4.8	27.5	0.81	11.7	2.00	0.252	0.188	1.083	0.032	0.461	11.4	14.4	C
B4-4240-2M	B 4	6.5	4.7	27.5	0.91	13.6	3.08	0.256	0.184	1.083	0.036	0.536	17.6	14.9	C
B4-4243-2M	B 4	6.6	4.6	27.5	1.02	15.4	4.63	0.260	0.180	1.083	0.040	0.605	26.4	15.1	C
B4-4427-2M	B 4	6.5	5.5	31.8	0.51	5.7	0.33	0.256	0.216	1.250	0.020	0.225	1.9	11.3	C
B4-4429-2M	B 4	6.5	5.4	31.8	0.56	6.8	0.45	0.256	0.212	1.250	0.022	0.269	2.6	12.2	C
092710	B 4	6.6	5.4	31.8	0.61	7.3	0.64	0.260	0.212	1.250	0.024	0.288	3.6	12.0	C
092810	B 4	6.7	5.3	31.8	0.71	8.7	1.15	0.264	0.208	1.250	0.028	0.343	6.6	12.3	C
092910	B 4	6.4	4.8	31.8	0.81	11.2	2.11	0.252	0.188	1.250	0.032	0.440	12.1	13.8	C
093010	B 4	6.5	4.7	31.8	0.91	13.0	3.24	0.256	0.184	1.250	0.036	0.513	18.5	14.3	C
093110	B 4	6.6	4.6	31.8	1.02	15.0	4.76	0.260	0.180	1.250	0.040	0.590	27.2	14.8	D
B4-4627-2M	B 4	6.5	5.5	38.1	0.51	6.7	0.27	0.256	0.216	1.500	0.020	0.264	1.6	13.2	C
B4-4629-2M	B 4	6.5	5.4	38.1	0.56	8.0	0.37	0.256	0.212	1.500	0.022	0.316	2.1	14.4	C
092712	B 4	6.6	5.4	38.1	0.61	8.5	0.53	0.260	0.212	1.500	0.024	0.336	3.0	14.0	C
092812	B 4	6.7	5.3	38.1	0.71	10.3	0.94	0.264	0.208	1.500	0.028	0.406	5.4	14.5	C
092912	B 4	6.4	4.8	38.1	0.81	13.0	1.77	0.252	0.188	1.500	0.032	0.512	10.1	16.0	C
093012	B 4	6.5	4.7	38.1	0.91	15.5	2.65	0.256	0.184	1.500	0.036	0.612	15.1	17.0	C
093112	B 4	6.6	4.6	38.1	1.02	17.8	3.91	0.260	0.180	1.500	0.040	0.700	22.3	17.5	D
092714	B 4	6.6	5.4	44.5	0.61	9.9	0.45	0.260	0.212	1.750	0.024	0.390	2.6	16.3	C
092814	B 4	6.7	5.3	44.5	0.71	11.7	0.81	0.264	0.208	1.750	0.028	0.462	4.6	16.5	C
092914	B 4	6.4	4.8	44.5	0.81	15.0	1.50	0.252	0.188	1.750	0.032	0.592	8.6	18.5	C
093014	B 4	6.5	4.7	44.5	0.91	17.8	2.27	0.256	0.184	1.750	0.036	0.702	12.9	19.5	D
093114	B 4	6.6	4.6	44.5	1.02	20.3	3.37	0.260	0.180	1.750	0.040	0.800	19.2	20.0	D
092716	B 4	6.6	5.4	50.8	0.61	11.1	0.39	0.260	0.212	2.000	0.024	0.438	2.2	18.3	D
092816	B 4	6.7	5.3	50.8	0.71	13.3	0.70	0.264	0.208	2.000	0.028	0.525	4.0	18.8	D
092916	B 4	6.4	4.8	50.8	0.81	17.1	1.31	0.252	0.188	2.000	0.032	0.672	7.5	21.0	D
093016	B 4	6.5	4.7	50.8	0.91	20.1	1.98	0.256	0.184	2.000	0.036	0.792	11.3	22.0	D
093116	B 4	6.6	4.6	50.8	1.02	22.9	2.96	0.260	0.180	2.000	0.040	0.900	16.9	22.5	D
092720	B 4	6.6	5.4	63.5	0.61	13.6	0.32	0.260	0.212	2.500	0.024	0.534	1.8	22.3	D
092820	B 4	6.7	5.3	63.5	0.71	16.4	0.56	0.264	0.208	2.500	0.028	0.644	3.2	23.0	D
092920	B 4	6.4	4.8	63.5	0.81	20.9	1.05	0.252	0.188	2.500	0.032	0.824	6.0	25.8	D
093020	B 4	6.5	4.7	63.5	0.91	24.9	1.57	0.256	0.184	2.500	0.036	0.981	9.0	27.3	D
093120	B 4	6.6	4.6	63.5	1.02	28.4	2.33	0.260	0.180	2.500	0.040	1.120	13.3	28.0	D
B5-2229-2M	B 5	7.2	6.1	9.5	0.56	2.4	1.43	0.283	0.239	0.375	0.022	0.095	8.2	4.3	C
B5-2231-2M	B 5	7.2	6.0	9.5	0.61	2.8	1.90	0.283	0.235	0.375	0.024	0.109	10.9	4.5	C
102803	B 5	7.4	6.0	9.5	0.71	3.4	3.08	0.291	0.235	0.375	0.028	0.133	17.6	4.8	C
102903	B 5	7.2	5.6	9.5	0.81	3.9	6.04	0.283	0.219	0.375	0.032	0.152	34.5	4.8	C
103003	B 5	7.3	5.5	9.5	0.91	4.3	9.66	0.287	0.215	0.375	0.036	0.171	55.2	4.8	C
103103	B 5	7.4	5.4	9.5	1.02	5.1	13.53	0.291	0.211	0.375	0.040	0.200	77.3	5.0	C
103203	B 5	7.2	4.8	9.5	1.22	6.4	31.48	0.283	0.187	0.375	0.048	0.252	179.7	5.3	C
B5-2331-2M	B 5	7.0	5.8	10.0	0.61	2.9	1.87	0.276	0.228	0.394	0.024	0.115	10.7	4.8	C
B5-2334-2M	B 5	7.0	5.6	10.0	0.71	3.7	3.20	0.276	0.220	0.394	0.028	0.145	18.3	5.2	C
B5-2337-2M	B 5	7.0	5.4	10.0	0.81	4.5	5.25	0.276	0.212	0.394	0.032	0.175	30.0	5.5	C
B5-2729-2M	B 5	7.2	6.1	12.7	0.56	2.9	1.04	0.283	0.239	0.500	0.022	0.114	5.9	5.2	C
B5-2731-2M	B 5	7.2	6.0	12.7	0.61	3.3	1.38	0.283	0.235	0.500	0.024	0.132	7.9	5.5	C

For Sales or Assistance - Tel 0117 967 3313

All characteristics are nominal

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	lbs/in	approx	
102804	B 5	7.4	6.0	12.7	0.71	4.0	2.35	0.291	0.235	0.500	0.028	0.157	13.4	5.6	C
102904	B 5	7.2	5.6	12.7	0.81	4.7	4.43	0.283	0.219	0.500	0.032	0.184	25.3	5.8	C
103004	B 5	7.3	5.5	12.7	0.91	5.5	6.64	0.287	0.215	0.500	0.036	0.216	37.9	6.0	C
103104	B 5	7.4	5.4	12.7	1.02	6.1	10.15	0.291	0.211	0.500	0.040	0.240	58.0	6.0	C
103204	B 5	7.2	4.8	12.7	1.22	7.9	22.73	0.283	0.187	0.500	0.048	0.312	129.8	6.5	C
B5-3031-2M	B 5	7.0	5.8	15.0	0.61	3.9	1.19	0.276	0.228	0.591	0.024	0.154	6.8	6.4	C
M144703	B 5	7.0	5.6	15.0	0.71	5.5	1.77	0.276	0.220	0.591	0.028	0.217	10.1	7.8	C
M144903	B 5	7.0	5.4	15.0	0.81	6.5	3.05	0.276	0.212	0.591	0.032	0.256	17.4	8.0	C
M145103	B 5	7.0	5.2	15.0	0.91	7.5	4.91	0.276	0.204	0.591	0.036	0.297	28.0	8.3	C
M145203	B 5	7.0	5.1	15.0	0.95	8.1	5.61	0.276	0.201	0.591	0.037	0.318	32.0	8.5	C
B5-3129-2M	B 5	7.2	6.1	15.9	0.56	3.4	0.81	0.283	0.239	0.625	0.022	0.133	4.7	6.1	C
B5-3131-2M	B 5	7.2	6.0	15.9	0.61	3.9	1.08	0.283	0.235	0.625	0.024	0.155	6.2	6.4	C
102805	B 5	7.4	6.0	15.9	0.71	4.8	1.80	0.291	0.235	0.625	0.028	0.188	10.3	6.7	C
102905	B 5	7.2	5.6	15.9	0.81	5.5	3.50	0.283	0.219	0.625	0.032	0.216	20.0	6.8	C
103005	B 5	7.3	5.5	15.9	0.91	6.4	5.31	0.287	0.215	0.625	0.036	0.252	30.3	7.0	C
103105	B 5	7.4	5.4	15.9	1.02	7.4	7.73	0.291	0.211	0.625	0.040	0.290	44.2	7.3	C
103205	B 5	7.2	4.8	15.9	1.22	9.4	17.79	0.283	0.187	0.625	0.048	0.372	101.6	7.8	C
B5-3429-2M	B 5	7.2	6.1	17.5	0.56	3.6	0.73	0.283	0.239	0.689	0.022	0.143	4.2	6.5	C
B5-3431-2M	B 5	7.2	6.0	17.5	0.61	4.2	0.97	0.283	0.235	0.689	0.024	0.167	5.6	6.9	C
B5-3434-2M	B 5	7.4	6.0	17.5	0.71	5.3	1.57	0.291	0.235	0.689	0.028	0.207	8.9	7.4	C
B5-3437-2M	B 5	7.2	5.6	17.5	0.81	6.8	2.64	0.283	0.219	0.689	0.032	0.266	15.1	8.3	C
B5-3440-2M	B 5	7.3	5.5	17.5	0.91	7.9	4.01	0.287	0.215	0.689	0.036	0.311	22.9	8.6	C
B5-3443-2M	B 5	7.4	5.4	17.5	1.02	9.0	5.95	0.291	0.211	0.689	0.040	0.353	33.9	8.8	C
B5-3447-2M	B 5	7.2	4.8	17.5	1.22	11.4	13.90	0.283	0.187	0.689	0.048	0.449	79.4	9.4	C
B5-3629-2M	B 5	7.2	6.1	19.1	0.56	3.9	0.67	0.283	0.239	0.750	0.022	0.152	3.8	6.9	C
B5-3631-2M	B 5	7.2	6.0	19.1	0.61	4.5	0.89	0.283	0.235	0.750	0.024	0.178	5.1	7.4	C
102806	B 5	7.4	6.0	19.1	0.71	5.3	1.54	0.291	0.235	0.750	0.028	0.210	8.8	7.5	C
102906	B 5	7.2	5.6	19.1	0.81	6.3	2.89	0.283	0.219	0.750	0.032	0.248	16.5	7.8	C
103006	B 5	7.3	5.5	19.1	0.91	7.5	4.25	0.287	0.215	0.750	0.036	0.297	24.3	8.3	C
103106	B 5	7.4	5.4	19.1	1.02	8.4	6.50	0.291	0.211	0.750	0.040	0.330	37.1	8.3	C
103206	B 5	7.2	4.8	19.1	1.22	11.0	14.61	0.283	0.187	0.750	0.048	0.432	83.4	9.0	C
B5-3731-2M	B 5	7.0	5.8	20.0	0.61	4.9	0.88	0.276	0.228	0.787	0.024	0.192	5.0	8.0	C
M144704	B 5	7.0	5.6	20.0	0.71	6.9	1.31	0.276	0.220	0.787	0.028	0.273	7.5	9.8	C
M144904	B 5	7.0	5.4	20.0	0.81	8.3	2.22	0.276	0.212	0.787	0.032	0.328	12.7	10.3	C
M145104	B 5	7.0	5.2	20.0	0.91	9.8	3.51	0.276	0.204	0.787	0.036	0.387	20.0	10.8	C
M145204	B 5	7.0	5.1	20.0	0.95	10.5	4.05	0.276	0.201	0.787	0.037	0.411	23.1	11.0	C
B5-3829-2M	B 5	7.2	6.1	22.2	0.56	4.4	0.57	0.283	0.239	0.875	0.022	0.172	3.3	7.8	C
B5-3831-2M	B 5	7.2	6.0	22.2	0.61	5.1	0.75	0.283	0.235	0.875	0.024	0.201	4.3	8.4	C
102807	B 5	7.4	6.0	22.2	0.71	6.0	1.30	0.291	0.235	0.875	0.028	0.238	7.4	8.5	C
102907	B 5	7.2	5.6	22.2	0.81	7.1	2.46	0.283	0.219	0.875	0.032	0.280	14.1	8.8	C
103007	B 5	7.3	5.5	22.2	0.91	8.5	3.66	0.287	0.215	0.875	0.036	0.333	20.9	9.3	C
103107	B 5	7.4	5.4	22.2	1.02	9.7	5.41	0.291	0.211	0.875	0.040	0.380	30.9	9.5	C
103207	B 5	7.2	4.8	22.2	1.22	12.5	12.40	0.283	0.187	0.875	0.048	0.492	70.8	10.3	D
B5-4031-2M	B 5	7.0	5.8	25.0	0.61	5.9	0.69	0.276	0.228	0.984	0.024	0.231	4.0	9.6	C
M144705	B 5	7.0	5.6	25.0	0.71	8.5	1.02	0.276	0.220	0.984	0.028	0.336	5.8	12.0	C
M144905	B 5	7.0	5.4	25.0	0.81	10.2	1.74	0.276	0.212	0.984	0.032	0.400	9.9	12.5	C
M145105	B 5	7.0	5.2	25.0	0.91	12.1	2.73	0.276	0.204	0.984	0.036	0.477	15.6	13.3	C
M145205	B 5	7.0	5.1	25.0	0.95	12.8	3.17	0.276	0.201	0.984	0.037	0.505	18.1	13.5	C
B5-4129-2M	B 5	7.2	6.1	25.4	0.56	4.8	0.50	0.283	0.239	1.000	0.022	0.191	2.8	8.7	C
B5-4131-2M	B 5	7.2	6.0	25.4	0.61	5.7	0.65	0.283	0.235	1.000	0.024	0.224	3.7	9.3	C
102808	B 5	7.4	6.0	25.4	0.71	6.8	1.13	0.291	0.235	1.000	0.028	0.266	6.4	9.5	C

Choose from millions of sizes - www.flexosprings.com

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No. of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	Lbs/in	approx	
102908	B 5	7.2	5.6	25.4	0.81	8.1	2.08	0.283	0.219	1.000	0.032	0.320	11.9	10.0	C
103008	B 5	7.3	5.5	25.4	0.91	9.4	3.22	0.287	0.215	1.000	0.036	0.369	18.4	10.3	C
103108	B 5	7.4	5.4	25.4	1.02	10.7	4.78	0.291	0.211	1.000	0.040	0.420	27.3	10.5	C
103208	B 5	7.2	4.8	25.4	1.22	14.0	10.77	0.283	0.187	1.000	0.048	0.552	61.5	11.5	D
B5-4229-2M	B 5	7.2	6.1	27.5	0.56	5.2	0.46	0.283	0.239	1.083	0.022	0.204	2.6	9.2	C
B5-4231-2M	B 5	7.2	6.0	27.5	0.61	6.1	0.60	0.283	0.235	1.083	0.024	0.239	3.4	10.0	C
B5-4234-2M	B 5	7.4	6.0	27.5	0.71	7.7	0.96	0.291	0.235	1.083	0.028	0.302	5.5	10.8	C
B5-4237-2M	B 5	7.2	5.6	27.5	0.81	10.0	1.62	0.283	0.219	1.083	0.032	0.393	9.2	12.3	C
B5-4240-2M	B 5	7.3	5.5	27.5	0.91	11.8	2.44	0.287	0.215	1.083	0.036	0.463	14.0	12.9	C
B5-4243-2M	B 5	7.4	5.4	27.5	1.02	13.5	3.61	0.291	0.211	1.083	0.040	0.530	20.6	13.2	C
B5-4247-2M	B 5	7.2	4.8	27.5	1.22	17.4	8.36	0.283	0.187	1.083	0.048	0.684	47.7	14.2	D
B5-4331-2M	B 5	7.0	5.8	30.0	0.61	6.8	0.57	0.276	0.228	1.181	0.024	0.269	3.3	11.2	C
M144706	B 5	7.0	5.6	30.0	0.71	10.0	0.85	0.276	0.220	1.181	0.028	0.392	4.8	14.0	C
M144906	B 5	7.0	5.4	30.0	0.81	12.0	1.43	0.276	0.212	1.181	0.032	0.472	8.2	14.8	C
M145106	B 5	7.0	5.2	30.0	0.91	14.4	2.23	0.276	0.204	1.181	0.036	0.567	12.7	15.8	C
M145206	B 5	7.0	5.1	30.0	0.95	15.2	2.60	0.276	0.201	1.181	0.037	0.598	14.9	16.0	C
B5-4429-2M	B 5	7.2	6.1	31.8	0.56	5.8	0.39	0.283	0.239	1.250	0.022	0.229	2.2	10.4	C
B5-4431-2M	B 5	7.2	6.0	31.8	0.61	6.9	0.52	0.283	0.235	1.250	0.024	0.270	3.0	11.3	C
102810	B 5	7.4	6.0	31.8	0.71	8.0	0.91	0.291	0.235	1.250	0.028	0.316	5.2	11.3	C
102910	B 5	7.2	5.6	31.8	0.81	9.8	1.66	0.283	0.219	1.250	0.032	0.384	9.5	12.0	C
103010	B 5	7.3	5.5	31.8	0.91	11.4	2.53	0.287	0.215	1.250	0.036	0.450	14.4	12.5	C
103110	B 5	7.4	5.4	31.8	1.02	12.7	3.87	0.291	0.211	1.250	0.040	0.500	22.1	12.5	D
103210	B 5	7.2	4.8	31.8	1.22	17.1	8.53	0.283	0.187	1.250	0.048	0.672	48.7	14.0	D
M144707	B 5	7.0	5.6	35.0	0.71	11.4	0.73	0.276	0.220	1.378	0.028	0.448	4.2	16.0	C
M144907	B 5	7.0	5.4	35.0	0.81	13.8	1.22	0.276	0.212	1.378	0.032	0.544	7.0	17.0	C
M145107	B 5	7.0	5.2	35.0	0.91	16.7	1.89	0.276	0.204	1.378	0.036	0.657	10.8	18.3	C
M145207	B 5	7.0	5.1	35.0	0.95	17.6	2.21	0.276	0.201	1.378	0.037	0.692	12.6	18.5	D
B5-4629-2M	B 5	7.2	6.1	38.1	0.56	6.8	0.33	0.283	0.239	1.500	0.022	0.268	1.9	12.2	C
B5-4631-2M	B 5	7.2	6.0	38.1	0.61	8.0	0.43	0.283	0.235	1.500	0.024	0.316	2.5	13.2	C
102812	B 5	7.4	6.0	38.1	0.71	9.3	0.76	0.291	0.235	1.500	0.028	0.367	4.4	13.1	C
102912	B 5	7.2	5.6	38.1	0.81	11.4	1.39	0.283	0.219	1.500	0.032	0.448	7.9	14.0	C
103012	B 5	7.3	5.5	38.1	0.91	13.3	2.13	0.287	0.215	1.500	0.036	0.522	12.1	14.5	C
103112	B 5	7.4	5.4	38.1	1.02	15.0	3.18	0.291	0.211	1.500	0.040	0.590	18.2	14.8	D
103212	B 5	7.2	4.8	38.1	1.22	19.8	7.18	0.283	0.187	1.500	0.048	0.780	41.0	16.3	D
M144708	B 5	7.0	5.6	40.0	0.71	13.0	0.63	0.276	0.220	1.575	0.028	0.511	3.6	18.3	C
M144908	B 5	7.0	5.4	40.0	0.81	15.9	1.04	0.276	0.212	1.575	0.032	0.624	6.0	19.5	C
M145108	B 5	7.0	5.2	40.0	0.91	18.7	1.66	0.276	0.204	1.575	0.036	0.738	9.5	20.5	D
M145208	B 5	7.0	5.1	40.0	0.95	20.0	1.92	0.276	0.201	1.575	0.037	0.785	11.0	21.0	D
102814	B 5	7.4	6.0	44.5	0.71	10.7	0.65	0.291	0.235	1.750	0.028	0.423	3.7	15.1	C
102914	B 5	7.2	5.6	44.5	0.81	13.0	1.19	0.283	0.219	1.750	0.032	0.512	6.8	16.0	C
103014	B 5	7.3	5.5	44.5	0.91	15.1	1.83	0.287	0.215	1.750	0.036	0.594	10.5	16.5	D
103114	B 5	7.4	5.4	44.5	1.02	17.3	2.71	0.291	0.211	1.750	0.040	0.680	15.5	17.0	D
103214	B 5	7.2	4.8	44.5	1.22	22.9	6.11	0.283	0.187	1.750	0.048	0.900	34.9	18.8	D
M144710	B 5	7.0	5.6	50.0	0.71	16.0	0.50	0.276	0.220	1.969	0.028	0.630	2.8	22.5	D
M144910	B 5	7.0	5.4	50.0	0.81	19.5	0.83	0.276	0.212	1.969	0.032	0.768	4.7	24.0	D
M145110	B 5	7.0	5.2	50.0	0.91	23.3	1.31	0.276	0.204	1.969	0.036	0.918	7.5	25.5	D
M145210	B 5	7.0	5.1	50.0	0.95	24.7	1.52	0.276	0.201	1.969	0.037	0.972	8.7	26.0	D
102816	B 5	7.4	6.0	50.8	0.71	12.0	0.57	0.291	0.235	2.000	0.028	0.473	3.2	16.9	D
102916	B 5	7.2	5.6	50.8	0.81	14.6	1.04	0.283	0.219	2.000	0.032	0.576	5.9	18.0	D
103016	B 5	7.3	5.5	50.8	0.91	17.1	1.59	0.287	0.215	2.000	0.036	0.675	9.1	18.8	D
103116	B 5	7.4	5.4	50.8	1.02	19.6	2.35	0.291	0.211	2.000	0.040	0.770	13.4	19.3	D

For Sales or Assistance - Tel 0117 967 3313

All characteristics are nominal

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	Lbs/in	approx	
103216	B 5	7.2	4.8	50.8	1.22	26.2	5.25	0.283	0.187	2.000	0.048	1.032	30.0	21.5	D
M144712	B 5	7.0	5.6	60.0	0.71	19.0	0.41	0.276	0.220	2.362	0.028	0.749	2.3	26.8	D
M144912	B 5	7.0	5.4	60.0	0.81	23.2	0.69	0.276	0.212	2.362	0.032	0.912	3.9	28.5	D
M145112	B 5	7.0	5.2	60.0	0.91	27.9	1.08	0.276	0.204	2.362	0.036	1.098	6.1	30.5	D
M145212	B 5	7.0	5.1	60.0	0.95	29.5	1.26	0.276	0.201	2.362	0.037	1.159	7.2	31.0	D
102820	B 5	7.4	6.0	63.5	0.71	14.9	0.45	0.291	0.235	2.500	0.028	0.588	2.5	21.0	D
102920	B 5	7.2	5.6	63.5	0.81	18.1	0.82	0.283	0.219	2.500	0.032	0.712	4.7	22.3	D
103020	B 5	7.3	5.5	63.5	0.91	21.0	1.26	0.287	0.215	2.500	0.036	0.828	7.2	23.0	D
103120	B 5	7.4	5.4	63.5	1.02	24.1	1.87	0.291	0.211	2.500	0.040	0.950	10.7	23.8	D
103220	B 5	7.2	4.8	63.5	1.22	32.0	4.22	0.283	0.187	2.500	0.048	1.260	24.1	26.3	E
B7-2334-2M	B 7	8.0	6.6	10.0	0.71	3.2	2.61	0.315	0.259	0.394	0.028	0.126	14.9	4.5	C
B7-2337-2M	B 7	8.0	6.4	10.0	0.81	3.9	4.20	0.315	0.251	0.394	0.032	0.153	24.0	4.8	C
B7-2340-2M	B 7	8.0	6.2	10.0	0.91	4.6	6.50	0.315	0.243	0.394	0.036	0.180	37.1	5.0	C
B7-2731-2M	B 7	8.1	6.9	12.7	0.61	2.9	1.18	0.319	0.271	0.500	0.024	0.115	6.7	4.8	C
112804	B 7	8.2	6.8	12.7	0.71	3.7	1.86	0.323	0.267	0.500	0.028	0.147	10.6	5.3	C
112904	B 7	8.0	6.4	12.7	0.81	4.3	3.59	0.315	0.251	0.500	0.032	0.168	20.5	5.3	C
113004	B 7	8.1	6.3	12.7	0.91	5.0	5.33	0.319	0.247	0.500	0.036	0.198	30.4	5.5	C
113104	B 7	8.2	6.2	12.7	1.02	5.6	8.14	0.323	0.243	0.500	0.040	0.220	46.5	5.5	C
113204	B 7	8.0	5.6	12.7	1.22	7.0	18.72	0.315	0.219	0.500	0.048	0.276	106.9	5.8	C
113304	B 7	8.2	5.4	12.7	1.42	8.9	30.63	0.323	0.211	0.500	0.056	0.350	174.9	6.3	D
B7-3034-2M	B 7	8.0	6.6	15.0	0.71	4.2	1.65	0.315	0.259	0.591	0.028	0.167	9.4	6.0	C
M164903	B 7	8.0	6.4	15.0	0.81	5.7	2.33	0.315	0.251	0.591	0.032	0.224	13.3	7.0	C
M165103	B 7	8.0	6.2	15.0	0.91	6.6	3.70	0.315	0.243	0.591	0.036	0.261	21.1	7.3	C
M165303	B 7	8.0	6.0	15.0	1.02	7.6	5.64	0.315	0.235	0.591	0.040	0.300	32.2	7.5	C
M165503	B 7	8.0	5.8	15.0	1.12	8.4	8.71	0.315	0.227	0.591	0.044	0.331	49.7	7.5	C
B7-3131-2M	B 7	8.1	6.9	15.9	0.61	3.4	0.92	0.319	0.271	0.625	0.024	0.133	5.3	5.5	C
112805	B 7	8.2	6.8	15.9	0.71	4.4	1.42	0.323	0.267	0.625	0.028	0.175	8.1	6.3	C
112905	B 7	8.0	6.4	15.9	0.81	5.1	2.74	0.315	0.251	0.625	0.032	0.200	15.7	6.3	C
113005	B 7	8.1	6.3	15.9	0.91	5.7	4.39	0.319	0.247	0.625	0.036	0.225	25.0	6.3	C
113105	B 7	8.2	6.2	15.9	1.02	6.6	6.33	0.323	0.243	0.625	0.040	0.260	36.1	6.5	C
113205	B 7	8.0	5.6	15.9	1.22	8.5	14.04	0.315	0.219	0.625	0.048	0.336	80.2	7.0	C
113305	B 7	8.2	5.4	15.9	1.42	10.3	24.79	0.323	0.211	0.625	0.056	0.406	141.6	7.3	D
B7-3431-2M	B 7	8.1	6.9	17.5	0.61	3.6	0.83	0.319	0.271	0.689	0.024	0.143	4.7	5.9	C
B7-3434-2M	B 7	8.2	6.8	17.5	0.71	4.6	1.35	0.323	0.267	0.689	0.028	0.181	7.7	6.5	C
B7-3437-2M	B 7	8.0	6.4	17.5	0.81	5.9	2.21	0.315	0.251	0.689	0.032	0.233	12.6	7.3	C
B7-3440-2M	B 7	8.1	6.3	17.5	0.91	7.0	3.32	0.319	0.247	0.689	0.036	0.274	18.9	7.6	C
B7-3443-2M	B 7	8.2	6.2	17.5	1.02	8.0	4.86	0.323	0.243	0.689	0.040	0.315	27.7	7.9	C
B7-3447-2M	B 7	8.0	5.6	17.5	1.22	10.3	10.82	0.315	0.219	0.689	0.048	0.407	61.8	8.5	C
B7-3631-2M	B 7	8.1	6.9	19.1	0.61	3.9	0.76	0.319	0.271	0.750	0.024	0.152	4.3	6.3	C
112806	B 7	8.2	6.8	19.1	0.71	5.0	1.21	0.323	0.267	0.750	0.028	0.196	6.9	7.0	C
112906	B 7	8.0	6.4	19.1	0.81	5.9	2.22	0.315	0.251	0.750	0.032	0.232	12.7	7.3	C
113006	B 7	8.1	6.3	19.1	0.91	6.6	3.55	0.319	0.247	0.750	0.036	0.261	20.3	7.3	C
113106	B 7	8.2	6.2	19.1	1.02	7.6	5.18	0.323	0.243	0.750	0.040	0.300	29.6	7.5	C
113206	B 7	8.0	5.6	19.1	1.22	9.8	11.70	0.315	0.219	0.750	0.048	0.384	66.8	8.0	C
113306	B 7	8.2	5.4	19.1	1.42	12.1	20.02	0.323	0.211	0.750	0.056	0.476	114.3	8.5	D
B7-3734-2M	B 7	8.0	6.6	20.0	0.71	5.3	1.21	0.315	0.259	0.787	0.028	0.208	6.9	7.4	C
M164904	B 7	8.0	6.4	20.0	0.81	7.1	1.73	0.315	0.251	0.787	0.032	0.280	9.9	8.8	C
M165104	B 7	8.0	6.2	20.0	0.91	8.5	2.68	0.315	0.243	0.787	0.036	0.333	15.3	9.3	C
M165304	B 7	8.0	6.0	20.0	1.02	9.7	4.13	0.315	0.235	0.787	0.040	0.380	23.6	9.5	C
M165504	B 7	8.0	5.8	20.0	1.12	10.9	6.18	0.315	0.227	0.787	0.044	0.430	35.3	9.8	C
B7-3831-2M	B 7	8.1	6.9	22.2	0.61	4.3	0.64	0.319	0.271	0.875	0.024	0.170	3.7	7.1	C

Choose from millions of sizes - www.flexosprings.com

Compression Springs




FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	lbs/in	approx	
112807	B 7	8.2	6.8	22.2	0.71	5.5	1.05	0.323	0.267	0.875	0.028	0.217	6.0	7.8	C
112907	B 7	8.0	6.4	22.2	0.81	6.5	1.94	0.315	0.251	0.875	0.032	0.256	11.1	8.0	C
113007	B 7	8.1	6.3	22.2	0.91	7.5	2.98	0.319	0.247	0.875	0.036	0.297	17.0	8.3	C
113107	B 7	8.2	6.2	22.2	1.02	8.6	4.38	0.323	0.243	0.875	0.040	0.340	25.0	8.5	C
113207	B 7	8.0	5.6	22.2	1.22	11.0	10.03	0.315	0.219	0.875	0.048	0.432	57.3	9.0	D
113307	B 7	8.2	5.4	22.2	1.42	13.9	16.79	0.323	0.211	0.875	0.056	0.546	95.9	9.8	D
B7-4034-2M	B 7	8.0	6.6	25.0	0.71	6.3	0.95	0.315	0.259	0.984	0.028	0.249	5.4	8.9	C
M164905	B 7	8.0	6.4	25.0	0.81	8.5	1.37	0.315	0.251	0.984	0.032	0.336	7.8	10.5	C
M165105	B 7	8.0	6.2	25.0	0.91	10.3	2.10	0.315	0.243	0.984	0.036	0.405	12.0	11.3	C
M165305	B 7	8.0	6.0	25.0	1.02	11.9	3.18	0.315	0.235	0.984	0.040	0.470	18.2	11.8	C
M165505	B 7	8.0	5.8	25.0	1.12	13.4	4.79	0.315	0.227	0.984	0.044	0.529	27.3	12.0	D
B7-4131-2M	B 7	8.1	6.9	25.4	0.61	4.8	0.56	0.319	0.271	1.000	0.024	0.188	3.2	7.8	C
112808	B 7	8.2	6.8	25.4	0.71	6.2	0.89	0.323	0.267	1.000	0.028	0.245	5.1	8.8	C
112908	B 7	8.0	6.4	25.4	0.81	7.1	1.73	0.315	0.251	1.000	0.032	0.280	9.9	8.8	C
113008	B 7	8.1	6.3	25.4	0.91	8.5	2.57	0.319	0.247	1.000	0.036	0.333	14.7	9.3	C
113108	B 7	8.2	6.2	25.4	1.02	9.7	3.80	0.323	0.243	1.000	0.040	0.380	21.7	9.5	C
113208	B 7	8.0	5.6	25.4	1.22	12.2	8.77	0.315	0.219	1.000	0.048	0.480	50.1	10.0	D
113308	B 7	8.2	5.4	25.4	1.42	15.3	14.88	0.323	0.211	1.000	0.056	0.602	84.9	10.8	D
B7-4231-2M	B 7	8.1	6.9	27.5	0.61	5.1	0.51	0.319	0.271	1.083	0.024	0.201	2.9	8.4	C
B7-4234-2M	B 7	8.2	6.8	27.5	0.71	6.6	0.83	0.323	0.267	1.083	0.028	0.259	4.7	9.3	C
B7-4237-2M	B 7	8.0	6.4	27.5	0.81	8.6	1.36	0.315	0.251	1.083	0.032	0.339	7.8	10.6	C
B7-4240-2M	B 7	8.1	6.3	27.5	0.91	10.2	2.03	0.319	0.247	1.083	0.036	0.403	11.6	11.2	C
B7-4243-2M	B 7	8.2	6.2	27.5	1.02	11.8	2.95	0.323	0.243	1.083	0.040	0.466	16.8	11.7	C
B7-4247-2M	B 7	8.0	5.6	27.5	1.22	15.6	6.50	0.315	0.219	1.083	0.048	0.614	37.1	12.8	D
B7-4251-2M	B 7	8.2	5.4	27.5	1.42	18.1	12.16	0.323	0.211	1.083	0.056	0.711	69.4	12.7	D
B7-4334-2M	B 7	8.0	6.6	30.0	0.71	7.3	0.78	0.315	0.259	1.181	0.028	0.289	4.5	10.3	C
M164906	B 7	8.0	6.4	30.0	0.81	10.2	1.11	0.315	0.251	1.181	0.032	0.400	6.3	12.5	C
M165106	B 7	8.0	6.2	30.0	0.91	12.1	1.73	0.315	0.243	1.181	0.036	0.477	9.9	13.3	C
M165306	B 7	8.0	6.0	30.0	1.02	14.2	2.58	0.315	0.235	1.181	0.040	0.560	14.8	14.0	D
M165506	B 7	8.0	5.8	30.0	1.12	16.0	3.91	0.315	0.227	1.181	0.044	0.628	22.3	14.3	D
B7-4431-2M	B 7	8.1	6.9	31.8	0.61	5.7	0.44	0.319	0.271	1.250	0.024	0.225	2.5	9.4	C
112810	B 7	8.2	6.8	31.8	0.71	7.5	0.71	0.323	0.267	1.250	0.028	0.294	4.1	10.5	C
112910	B 7	8.0	6.4	31.8	0.81	8.7	1.33	0.315	0.251	1.250	0.032	0.344	7.6	10.8	C
113010	B 7	8.1	6.3	31.8	0.91	10.1	2.07	0.319	0.247	1.250	0.036	0.396	11.8	11.0	C
113110	B 7	8.2	6.2	31.8	1.02	11.4	3.08	0.323	0.243	1.250	0.040	0.450	17.6	11.3	D
113210	B 7	8.0	5.6	31.8	1.22	14.9	6.85	0.315	0.219	1.250	0.048	0.588	39.1	12.3	D
113310	B 7	8.2	5.4	31.8	1.42	18.5	11.83	0.323	0.211	1.250	0.056	0.728	67.6	13.0	D
B7-4534-2M	B 7	8.0	6.6	35.0	0.71	8.4	0.67	0.315	0.259	1.378	0.028	0.330	3.8	11.8	C
B7-4537-2M	B 7	8.0	6.4	35.0	0.81	10.6	1.05	0.315	0.251	1.378	0.032	0.419	6.0	13.1	C
B7-4540-2M	B 7	8.0	6.2	35.0	0.91	12.9	1.60	0.315	0.243	1.378	0.036	0.509	9.1	14.1	C
B7-4543-2M	B 7	8.0	6.0	35.0	1.02	15.2	2.39	0.315	0.235	1.378	0.040	0.599	13.6	15.0	D
B7-4545-2M	B 7	8.0	5.8	35.0	1.12	17.5	3.51	0.315	0.227	1.378	0.044	0.689	20.1	15.6	D
B7-4631-2M	B 7	8.1	6.9	38.1	0.61	6.7	0.37	0.319	0.271	1.500	0.024	0.262	2.1	10.9	C
112812	B 7	8.2	6.8	38.1	0.71	8.7	0.59	0.323	0.267	1.500	0.028	0.343	3.4	12.3	C
112912	B 7	8.0	6.4	38.1	0.81	10.2	1.11	0.315	0.251	1.500	0.032	0.400	6.3	12.5	C
113012	B 7	8.1	6.3	38.1	0.91	11.7	1.73	0.319	0.247	1.500	0.036	0.459	9.9	12.8	C
113112	B 7	8.2	6.2	38.1	1.02	13.5	2.53	0.323	0.243	1.500	0.040	0.530	14.5	13.3	D
113212	B 7	8.0	5.6	38.1	1.22	17.4	5.73	0.315	0.219	1.500	0.048	0.684	32.7	14.3	D
113312	B 7	8.2	5.4	38.1	1.42	21.7	9.82	0.323	0.211	1.500	0.056	0.854	56.1	15.3	E
B7-4734-2M	B 7	8.0	6.6	40.0	0.71	9.4	0.58	0.315	0.259	1.575	0.028	0.371	3.3	13.3	C
M164908	B 7	8.0	6.4	40.0	0.81	13.0	0.83	0.315	0.251	1.575	0.032	0.512	4.8	16.0	C

For Sales or Assistance - Tel 0117 967 3313

All characteristics are nominal

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	Lbs/in	approx	
M165108	B 7	8.0	6.2	40.0	0.91	15.8	1.27	0.315	0.243	1.575	0.036	0.621	7.3	17.3	D
M165308	B 7	8.0	6.0	40.0	1.02	18.5	1.91	0.315	0.235	1.575	0.040	0.730	10.9	18.3	D
M165508	B 7	8.0	5.8	40.0	1.12	21.0	2.86	0.315	0.227	1.575	0.044	0.827	16.3	18.8	D
112814	B 7	8.2	6.8	44.5	0.71	9.8	0.51	0.323	0.267	1.750	0.028	0.385	2.9	13.8	C
112914	B 7	8.0	6.4	44.5	0.81	11.6	0.95	0.315	0.251	1.750	0.032	0.456	5.4	14.3	C
113014	B 7	8.1	6.3	44.5	0.91	13.5	1.46	0.319	0.247	1.750	0.036	0.531	8.3	14.8	D
113114	B 7	8.2	6.2	44.5	1.02	15.5	2.15	0.323	0.243	1.750	0.040	0.610	12.3	15.3	D
113214	B 7	8.0	5.6	44.5	1.22	20.1	4.84	0.315	0.219	1.750	0.048	0.792	27.6	16.5	D
113314	B 7	8.2	5.4	44.5	1.42	25.2	8.26	0.323	0.211	1.750	0.056	0.994	47.2	17.8	E
B7-5034-2M	B 7	8.0	6.6	50.0	0.71	11.5	0.46	0.315	0.259	1.969	0.028	0.453	2.6	16.2	D
M164910	B 7	8.0	6.4	50.0	0.81	16.1	0.66	0.315	0.251	1.969	0.032	0.632	3.8	19.8	D
M165110	B 7	8.0	6.2	50.0	0.91	19.4	1.01	0.315	0.243	1.969	0.036	0.765	5.8	21.3	D
M165310	B 7	8.0	6.0	50.0	1.02	22.9	1.51	0.315	0.235	1.969	0.040	0.900	8.6	22.5	D
M165510	B 7	8.0	5.8	50.0	1.12	26.0	2.25	0.315	0.227	1.969	0.044	1.025	12.9	23.3	D
112816	B 7	8.2	6.8	50.8	0.71	11.0	0.45	0.323	0.267	2.000	0.028	0.434	2.6	15.5	D
112916	B 7	8.0	6.4	50.8	0.81	13.0	0.83	0.315	0.251	2.000	0.032	0.512	4.8	16.0	D
113016	B 7	8.1	6.3	50.8	0.91	15.1	1.29	0.319	0.247	2.000	0.036	0.594	7.3	16.5	D
113116	B 7	8.2	6.2	50.8	1.02	17.3	1.90	0.323	0.243	2.000	0.040	0.680	10.8	17.0	D
113216	B 7	8.0	5.6	50.8	1.22	22.6	4.25	0.315	0.219	2.000	0.048	0.888	24.3	18.5	D
113316	B 7	8.2	5.4	50.8	1.42	28.4	7.23	0.323	0.211	2.000	0.056	1.120	41.3	20.0	E
M164912	B 7	8.0	6.4	60.0	0.81	19.1	0.54	0.315	0.251	2.362	0.032	0.752	3.1	23.5	D
M165112	B 7	8.0	6.2	60.0	0.91	23.1	0.84	0.315	0.243	2.362	0.036	0.909	4.8	25.3	D
M165312	B 7	8.0	6.0	60.0	1.02	27.2	1.25	0.315	0.235	2.362	0.040	1.070	7.2	26.8	D
M165512	B 7	8.0	5.8	60.0	1.12	31.1	1.86	0.315	0.227	2.362	0.044	1.224	10.6	27.8	E
112820	B 7	8.2	6.8	63.5	0.71	13.5	0.35	0.323	0.267	2.500	0.028	0.532	2.0	19.0	D
112920	B 7	8.0	6.4	63.5	0.81	15.9	0.67	0.315	0.251	2.500	0.032	0.624	3.8	19.5	D
113020	B 7	8.1	6.3	63.5	0.91	18.5	1.02	0.319	0.247	2.500	0.036	0.729	5.8	20.3	D
113120	B 7	8.2	6.2	63.5	1.02	21.3	1.50	0.323	0.243	2.500	0.040	0.840	8.6	21.0	D
113220	B 7	8.0	5.6	63.5	1.22	27.7	3.38	0.315	0.219	2.500	0.048	1.092	19.3	22.8	E
113320	B 7	8.2	5.4	63.5	1.42	34.8	5.78	0.323	0.211	2.500	0.056	1.372	33.0	24.5	E
M164914	B 7	8.0	6.4	70.0	0.81	22.0	0.47	0.315	0.251	2.756	0.032	0.864	2.7	27.0	D
M165114	B 7	8.0	6.2	70.0	0.91	26.7	0.71	0.315	0.243	2.756	0.036	1.053	4.1	29.3	D
M165314	B 7	8.0	6.0	70.0	1.02	31.5	1.07	0.315	0.235	2.756	0.040	1.240	6.1	31.0	E
M165514	B 7	8.0	5.8	70.0	1.12	36.1	1.58	0.315	0.227	2.756	0.044	1.422	9.0	32.3	E
112824	B 7	8.2	6.8	76.2	0.71	16.0	0.29	0.323	0.267	3.000	0.028	0.630	1.7	22.5	D
112924	B 7	8.0	6.4	76.2	0.81	18.7	0.56	0.315	0.251	3.000	0.032	0.736	3.2	23.0	D
113024	B 7	8.1	6.3	76.2	0.91	21.9	0.85	0.319	0.247	3.000	0.036	0.864	4.8	24.0	D
113124	B 7	8.2	6.2	76.2	1.02	25.1	1.25	0.323	0.243	3.000	0.040	0.990	7.2	24.8	E
113224	B 7	8.0	5.6	76.2	1.22	32.9	2.81	0.315	0.219	3.000	0.048	1.296	16.0	27.0	E
113324	B 7	8.2	5.4	76.2	1.42	41.6	4.78	0.323	0.211	3.000	0.056	1.638	27.3	29.3	F
B9-2734-2M	B 9	8.8	7.4	12.7	0.71	3.4	1.74	0.346	0.290	0.500	0.028	0.133	9.9	4.8	C
122904	B 9	8.7	7.1	12.7	0.81	4.1	2.85	0.343	0.279	0.500	0.032	0.163	16.3	5.1	C
123004	B 9	8.8	7.0	12.7	0.91	4.7	4.55	0.346	0.274	0.500	0.036	0.184	26.0	5.1	C
123104	B 9	8.9	6.9	12.7	1.02	5.4	6.53	0.350	0.270	0.500	0.040	0.212	37.3	5.3	C
123204	B 9	8.8	6.4	12.7	1.22	6.4	15.46	0.346	0.250	0.500	0.048	0.252	88.3	5.3	C
123304	B 9	9.0	6.2	12.7	1.42	7.8	26.61	0.354	0.242	0.500	0.056	0.308	151.9	5.5	D
123404	B 9	8.8	5.5	12.7	1.63	9.3	50.04	0.346	0.218	0.500	0.064	0.368	285.7	5.8	D
B9-3037-2M	B 9	9.0	7.4	15.0	0.81	4.5	2.20	0.354	0.290	0.591	0.032	0.179	12.5	5.6	C
B9-3040-2M	B 9	9.0	7.2	15.0	0.91	5.4	3.31	0.354	0.282	0.591	0.036	0.214	18.9	6.0	C
B9-3043-2M	B 9	9.0	7.0	15.0	1.02	6.3	4.89	0.354	0.274	0.591	0.040	0.250	27.9	6.2	C
B9-3045-2M	B 9	9.0	6.8	15.0	1.12	7.3	7.13	0.354	0.266	0.591	0.044	0.285	40.7	6.5	C

Choose from millions of sizes - www.flexosprings.com

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	Lbs/in		
B9-3134-2M	B 9	8.8	7.4	15.9	0.71	3.9	1.36	0.346	0.290	0.625	0.028	0.155	7.7	5.5	C
122905	B 9	8.7	7.1	15.9	0.81	4.8	2.26	0.343	0.279	0.625	0.032	0.189	12.9	5.9	C
123005	B 9	8.8	7.0	15.9	0.91	5.4	3.62	0.346	0.274	0.625	0.036	0.212	20.7	5.9	C
123105	B 9	8.9	6.9	15.9	1.02	6.2	5.26	0.350	0.270	0.625	0.040	0.244	30.0	6.1	C
123205	B 9	8.8	6.4	15.9	1.22	7.6	11.82	0.346	0.250	0.625	0.048	0.300	67.5	6.3	C
123305	B 9	9.0	6.2	15.9	1.42	9.2	20.70	0.354	0.242	0.625	0.056	0.364	118.2	6.5	D
123405	B 9	8.8	5.5	15.9	1.63	11.0	39.51	0.346	0.218	0.625	0.064	0.432	225.6	6.8	D
B9-3434-2M	B 9	8.8	7.4	17.5	0.71	4.2	1.22	0.346	0.290	0.689	0.028	0.166	7.0	5.9	C
B9-3437-2M	B 9	8.7	7.1	17.5	0.81	5.3	1.95	0.343	0.279	0.689	0.032	0.209	11.1	6.5	C
B9-3440-2M	B 9	8.8	7.0	17.5	0.91	6.3	2.89	0.346	0.274	0.689	0.036	0.248	16.5	6.9	C
B9-3443-2M	B 9	8.9	6.9	17.5	1.02	7.3	4.18	0.350	0.270	0.689	0.040	0.286	23.9	7.2	C
B9-3447-2M	B 9	8.8	6.4	17.5	1.22	9.4	8.78	0.346	0.250	0.689	0.048	0.371	50.1	7.7	C
B9-3634-2M	B 9	8.8	7.4	19.1	0.71	4.5	1.11	0.346	0.290	0.750	0.028	0.176	6.4	6.3	C
122906	B 9	8.7	7.1	19.1	0.81	5.4	1.88	0.343	0.279	0.750	0.032	0.214	10.7	6.7	C
123006	B 9	8.8	7.0	19.1	0.91	6.4	2.82	0.346	0.274	0.750	0.036	0.252	16.1	7.0	C
123106	B 9	8.9	6.9	19.1	1.02	7.0	4.40	0.350	0.270	0.750	0.040	0.276	25.1	6.9	C
123206	B 9	8.8	6.4	19.1	1.22	8.8	9.57	0.346	0.250	0.750	0.048	0.348	54.6	7.3	C
123306	B 9	9.0	6.2	19.1	1.42	10.7	16.93	0.354	0.242	0.750	0.056	0.420	96.7	7.5	D
123406	B 9	8.8	5.5	19.1	1.63	12.6	32.64	0.346	0.218	0.750	0.064	0.496	186.4	7.8	D
B9-3737-2M	B 9	9.0	7.4	20.0	0.81	5.6	1.60	0.354	0.290	0.787	0.032	0.222	9.1	6.9	C
M185104	B 9	9.0	7.2	20.0	0.91	7.3	2.18	0.354	0.282	0.787	0.036	0.288	12.5	8.0	C
M185304	B 9	9.0	7.0	20.0	1.02	8.6	3.19	0.354	0.274	0.787	0.040	0.340	18.2	8.5	C
M185504	B 9	9.0	6.8	20.0	1.12	9.8	4.72	0.354	0.266	0.787	0.044	0.386	27.0	8.8	C
M185704	B 9	9.0	6.6	20.0	1.22	10.4	7.15	0.354	0.258	0.787	0.048	0.408	40.8	8.5	D
B9-3834-2M	B 9	8.8	7.4	22.2	0.71	5.0	0.94	0.346	0.290	0.875	0.028	0.198	5.4	7.1	C
B9-3837-2M	B 9	8.7	7.1	22.2	0.81	6.4	1.50	0.343	0.279	0.875	0.032	0.253	8.6	7.9	C
B9-3840-2M	B 9	8.8	7.0	22.2	0.91	7.6	2.22	0.346	0.274	0.875	0.036	0.301	12.7	8.4	C
B9-3843-2M	B 9	8.9	6.9	22.2	1.02	8.9	3.20	0.350	0.270	0.875	0.040	0.349	18.3	8.7	C
B9-3847-2M	B 9	8.8	6.4	22.2	1.22	11.6	6.68	0.346	0.250	0.875	0.048	0.457	38.2	9.5	D
B9-3851-2M	B 9	9.0	6.2	22.2	1.42	13.6	12.29	0.354	0.242	0.875	0.056	0.536	70.2	9.6	D
B9-3854-2M	B 9	8.8	5.5	22.2	1.63	15.9	24.18	0.346	0.218	0.875	0.064	0.625	138.1	9.8	E
B9-4037-2M	B 9	9.0	7.4	25.0	0.81	6.7	1.26	0.354	0.290	0.984	0.032	0.265	7.2	8.3	C
M185105	B 9	9.0	7.2	25.0	0.91	8.9	1.69	0.354	0.282	0.984	0.036	0.351	9.6	9.8	C
M185305	B 9	9.0	7.0	25.0	1.02	10.4	2.52	0.354	0.274	0.984	0.040	0.410	14.4	10.3	C
M185505	B 9	9.0	6.8	25.0	1.12	11.8	3.75	0.354	0.266	0.984	0.044	0.463	21.4	10.5	D
M185705	B 9	9.0	6.6	25.0	1.22	12.6	5.60	0.354	0.258	0.984	0.048	0.494	32.0	10.3	D
B9-4134-2M	B 9	8.8	7.4	25.4	0.71	5.6	0.82	0.346	0.290	1.000	0.028	0.220	4.7	7.8	C
122908	B 9	8.7	7.1	25.4	0.81	6.9	1.36	0.343	0.279	1.000	0.032	0.272	7.8	8.5	C
123008	B 9	8.8	7.0	25.4	0.91	7.8	2.17	0.346	0.274	1.000	0.036	0.306	12.4	8.5	C
123108	B 9	8.9	6.9	25.4	1.02	8.8	3.22	0.350	0.270	1.000	0.040	0.348	18.4	8.7	C
123208	B 9	8.8	6.4	25.4	1.22	11.0	7.18	0.346	0.250	1.000	0.048	0.432	41.0	9.0	D
123308	B 9	9.0	6.2	25.4	1.42	13.5	12.42	0.354	0.242	1.000	0.056	0.532	70.9	9.5	D
123408	B 9	8.8	5.5	25.4	1.63	16.3	23.46	0.346	0.218	1.000	0.064	0.640	133.9	10.0	E
B9-4234-2M	B 9	8.8	7.4	27.5	0.71	5.9	0.75	0.346	0.290	1.083	0.028	0.234	4.3	8.4	C
B9-4237-2M	B 9	8.7	7.1	27.5	0.81	7.6	1.19	0.343	0.279	1.083	0.032	0.301	6.8	9.4	C
B9-4240-2M	B 9	8.8	7.0	27.5	0.91	9.1	1.76	0.346	0.274	1.083	0.036	0.360	10.1	10.0	C
B9-4243-2M	B 9	8.9	6.9	27.5	1.02	10.7	2.54	0.350	0.270	1.083	0.040	0.419	14.5	10.5	C
B9-4247-2M	B 9	8.8	6.4	27.5	1.22	14.0	5.28	0.346	0.250	1.083	0.048	0.553	30.1	11.5	D
B9-4251-2M	B 9	9.0	6.2	27.5	1.42	16.5	9.66	0.354	0.242	1.083	0.056	0.652	55.2	11.6	D
B9-4254-2M	B 9	8.8	5.5	27.5	1.63	19.4	18.93	0.346	0.218	1.083	0.064	0.763	108.1	11.9	E
B9-4337-2M	B 9	9.0	7.4	30.0	0.81	7.8	1.03	0.354	0.290	1.181	0.032	0.308	5.9	9.6	C

For Sales or Assistance - Tel 0117 967 3313

All characteristics are nominal

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	lbs/in		
M185106	B 9	9.0	7.2	30.0	0.91	10.3	1.41	0.354	0.282	1.181	0.036	0.405	8.1	11.3	C
M185306	B 9	9.0	7.0	30.0	1.02	12.2	2.08	0.354	0.274	1.181	0.040	0.480	11.9	12.0	D
M185506	B 9	9.0	6.8	30.0	1.12	14.0	3.04	0.354	0.266	1.181	0.044	0.551	17.3	12.5	D
M185706	B 9	9.0	6.6	30.0	1.22	14.9	4.56	0.354	0.258	1.181	0.048	0.586	26.0	12.2	D
B9-4434-2M	B 9	8.8	7.4	31.8	0.71	6.7	0.65	0.346	0.290	1.250	0.028	0.263	3.7	9.4	C
122910	B 9	8.7	7.1	31.8	0.81	8.1	1.10	0.343	0.279	1.250	0.032	0.320	6.3	10.0	C
123010	B 9	8.8	7.0	31.8	0.91	9.3	1.72	0.346	0.274	1.250	0.036	0.367	9.8	10.2	C
123110	B 9	8.9	6.9	31.8	1.02	10.8	2.51	0.350	0.270	1.250	0.040	0.424	14.3	10.6	D
123210	B 9	8.8	6.4	31.8	1.22	13.4	5.58	0.346	0.250	1.250	0.048	0.528	31.9	11.0	D
123310	B 9	9.0	6.2	31.8	1.42	16.4	9.80	0.354	0.242	1.250	0.056	0.644	56.0	11.5	D
123410	B 9	8.8	5.5	31.8	1.63	19.9	18.31	0.346	0.218	1.250	0.064	0.784	104.5	12.3	E
B9-4537-2M	B 9	9.0	7.4	35.0	0.81	8.9	0.88	0.354	0.290	1.378	0.032	0.351	5.0	11.0	C
B9-4540-2M	B 9	9.0	7.2	35.0	0.91	10.9	1.31	0.354	0.282	1.378	0.036	0.430	7.5	12.0	C
B9-4543-2M	B 9	9.0	7.0	35.0	1.02	13.0	1.92	0.354	0.274	1.378	0.040	0.511	11.0	12.8	D
B9-4545-2M	B 9	9.0	6.8	35.0	1.12	15.1	2.78	0.354	0.266	1.378	0.044	0.595	15.8	13.5	D
B9-4547-2M	B 9	9.0	6.6	35.0	1.22	17.0	3.88	0.354	0.258	1.378	0.048	0.671	22.1	14.0	D
B9-4634-2M	B 9	8.8	7.4	38.1	0.71	7.8	0.53	0.346	0.290	1.500	0.028	0.306	3.1	10.9	C
122912	B 9	8.7	7.1	38.1	0.81	9.3	0.93	0.343	0.279	1.500	0.032	0.368	5.3	11.5	C
123012	B 9	8.8	7.0	38.1	0.91	10.8	1.44	0.346	0.274	1.500	0.036	0.425	8.2	11.8	C
123112	B 9	8.9	6.9	38.1	1.02	12.6	2.07	0.350	0.270	1.500	0.040	0.496	11.8	12.4	D
123212	B 9	8.8	6.4	38.1	1.22	15.5	4.67	0.346	0.250	1.500	0.048	0.612	26.7	12.8	D
123312	B 9	9.0	6.2	38.1	1.42	19.2	8.10	0.354	0.242	1.500	0.056	0.756	46.2	13.5	E
123412	B 9	8.8	5.5	38.1	1.63	23.2	15.32	0.346	0.218	1.500	0.064	0.912	87.5	14.3	E
B9-4737-2M	B 9	9.0	7.4	40.0	0.81	10.0	0.77	0.354	0.290	1.575	0.032	0.394	4.4	12.3	C
M185108	B 9	9.0	7.2	40.0	0.91	13.5	1.03	0.354	0.282	1.575	0.036	0.531	5.9	14.8	D
M185308	B 9	9.0	7.0	40.0	1.02	15.7	1.54	0.354	0.274	1.575	0.040	0.620	8.8	15.5	D
M185508	B 9	9.0	6.8	40.0	1.12	18.2	2.24	0.354	0.266	1.575	0.044	0.717	12.8	16.3	D
M185708	B 9	9.0	6.6	40.0	1.22	19.4	3.34	0.354	0.258	1.575	0.048	0.763	19.1	15.9	D
B9-4834-2M	B 9	8.8	7.4	44.5	0.71	8.9	0.46	0.346	0.290	1.750	0.028	0.350	2.6	12.5	C
122914	B 9	8.7	7.1	44.5	0.81	10.6	0.80	0.343	0.279	1.750	0.032	0.416	4.6	13.0	C
123014	B 9	8.8	7.0	44.5	0.91	12.3	1.23	0.346	0.274	1.750	0.036	0.486	7.0	13.5	D
123114	B 9	8.9	6.9	44.5	1.02	14.3	1.78	0.350	0.270	1.750	0.040	0.564	10.2	14.1	D
123214	B 9	8.8	6.4	44.5	1.22	17.7	4.02	0.346	0.250	1.750	0.048	0.696	22.9	14.5	D
123314	B 9	9.0	6.2	44.5	1.42	22.0	6.90	0.354	0.242	1.750	0.056	0.868	39.4	15.5	E
123414	B 9	8.8	5.5	44.5	1.63	26.8	12.94	0.346	0.218	1.750	0.064	1.056	73.9	16.5	E
B9-5037-2M	B 9	9.0	7.4	50.0	0.81	12.2	0.61	0.354	0.290	1.969	0.032	0.480	3.5	15.0	D
M185110	B 9	9.0	7.2	50.0	0.91	16.5	0.82	0.354	0.282	1.969	0.036	0.648	4.7	18.0	D
M185310	B 9	9.0	7.0	50.0	1.02	19.6	1.20	0.354	0.274	1.969	0.040	0.770	6.9	19.3	D
M185510	B 9	9.0	6.8	50.0	1.12	22.7	1.75	0.354	0.266	1.969	0.044	0.893	10.0	20.3	D
M185710	B 9	9.0	6.6	50.0	1.22	23.9	2.64	0.354	0.258	1.969	0.048	0.941	15.1	19.6	E
B9-5134-2M	B 9	8.8	7.4	50.8	0.71	10.0	0.40	0.346	0.290	2.000	0.028	0.393	2.3	14.0	D
122916	B 9	8.7	7.1	50.8	0.81	12.0	0.69	0.343	0.279	2.000	0.032	0.474	3.9	14.8	D
123016	B 9	8.8	7.0	50.8	0.91	13.8	1.08	0.346	0.274	2.000	0.036	0.543	6.1	15.1	D
123116	B 9	8.9	6.9	50.8	1.02	16.2	1.55	0.350	0.270	2.000	0.040	0.636	8.9	15.9	D
123216	B 9	8.8	6.4	50.8	1.22	19.8	3.53	0.346	0.250	2.000	0.048	0.780	20.1	16.3	D
123316	B 9	9.0	6.2	50.8	1.42	24.9	6.01	0.354	0.242	2.000	0.056	0.980	34.3	17.5	E
123416	B 9	8.8	5.5	50.8	1.63	30.1	11.37	0.346	0.218	2.000	0.064	1.184	64.9	18.5	E
M185112	B 9	9.0	7.2	60.0	0.91	19.7	0.67	0.354	0.282	2.362	0.036	0.774	3.8	21.5	D
M185312	B 9	9.0	7.0	60.0	1.02	23.1	1.00	0.354	0.274	2.362	0.040	0.910	5.7	22.8	D
M185512	B 9	9.0	6.8	60.0	1.12	26.9	1.45	0.354	0.266	2.362	0.044	1.058	8.3	24.0	E
M185712	B 9	9.0	6.6	60.0	1.22	28.3	2.19	0.354	0.258	2.362	0.048	1.113	12.5	23.2	E

Choose from millions of sizes - www.flexosprings.com

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	lbs/in		
122920	B 9	8.7	7.1	63.5	0.81	14.6	0.56	0.343	0.279	2.500	0.032	0.573	3.2	17.9	D
123020	B 9	8.8	7.0	63.5	0.91	16.8	0.86	0.346	0.274	2.500	0.036	0.662	4.9	18.4	D
123120	B 9	8.9	6.9	63.5	1.02	19.6	1.25	0.350	0.270	2.500	0.040	0.772	7.1	19.3	D
123220	B 9	8.8	6.4	63.5	1.22	24.4	2.79	0.346	0.250	2.500	0.048	0.960	15.9	20.0	E
123320	B 9	9.0	6.2	63.5	1.42	30.6	4.78	0.354	0.242	2.500	0.056	1.204	27.3	21.5	E
123420	B 9	8.8	5.5	63.5	1.63	37.0	9.04	0.346	0.218	2.500	0.064	1.456	51.6	22.8	F
M185114	B 9	9.0	7.2	70.0	0.91	22.6	0.58	0.354	0.282	2.756	0.036	0.891	3.3	24.8	D
M185314	B 9	9.0	7.0	70.0	1.02	26.7	0.86	0.354	0.274	2.756	0.040	1.050	4.9	26.3	E
M185514	B 9	9.0	6.8	70.0	1.12	31.1	1.24	0.354	0.266	2.756	0.044	1.224	7.1	27.8	E
M185714	B 9	9.0	6.6	70.0	1.22	32.8	1.87	0.354	0.258	2.756	0.048	1.291	10.7	26.9	E
122924	B 9	8.7	7.1	76.2	0.81	17.3	0.46	0.343	0.279	3.000	0.032	0.682	2.6	21.3	D
123024	B 9	8.8	7.0	76.2	0.91	20.1	0.71	0.346	0.274	3.000	0.036	0.792	4.0	22.0	D
123124	B 9	8.9	6.9	76.2	1.02	23.2	1.04	0.350	0.270	3.000	0.040	0.912	5.9	22.8	E
123224	B 9	8.8	6.4	76.2	1.22	29.0	2.31	0.346	0.250	3.000	0.048	1.140	13.2	23.8	E
123324	B 9	9.0	6.2	76.2	1.42	36.3	3.96	0.354	0.242	3.000	0.056	1.428	22.6	25.5	F
123424	B 9	8.8	5.5	76.2	1.63	43.9	7.51	0.346	0.218	3.000	0.064	1.728	42.9	27.0	F
M185116	B 9	9.0	7.2	80.0	0.91	25.6	0.50	0.354	0.282	3.150	0.036	1.008	2.9	28.0	E
M185316	B 9	9.0	7.0	80.0	1.02	30.2	0.75	0.354	0.274	3.150	0.040	1.190	4.3	29.8	E
M185516	B 9	9.0	6.8	80.0	1.12	35.3	1.08	0.354	0.266	3.150	0.044	1.389	6.2	31.5	E
M185716	B 9	9.0	6.6	80.0	1.22	37.3	1.62	0.354	0.258	3.150	0.048	1.469	9.3	30.6	E
122928	B 9	8.7	7.1	88.9	0.81	19.8	0.40	0.343	0.279	3.500	0.032	0.778	2.3	24.3	D
123028	B 9	8.8	7.0	88.9	0.91	23.1	0.61	0.346	0.274	3.500	0.036	0.910	3.5	25.3	E
123128	B 9	8.9	6.9	88.9	1.02	26.8	0.88	0.350	0.270	3.500	0.040	1.056	5.0	26.4	E
123228	B 9	8.8	6.4	88.9	1.22	33.5	1.97	0.346	0.250	3.500	0.048	1.320	11.2	27.5	E
123328	B 9	9.0	6.2	88.9	1.42	41.9	3.39	0.354	0.242	3.500	0.056	1.652	19.3	29.5	F
123428	B 9	8.8	5.5	88.9	1.63	50.8	6.42	0.346	0.218	3.500	0.064	2.000	36.6	31.3	F
C1-2734-2M	C 1	9.6	8.2	12.7	0.71	3.1	1.55	0.378	0.322	0.500	0.028	0.121	8.8	4.3	C
132904	C 1	9.5	7.9	12.7	0.81	3.9	2.36	0.374	0.310	0.500	0.032	0.154	13.5	4.8	C
133004	C 1	9.6	7.8	12.7	0.91	4.4	3.77	0.378	0.306	0.500	0.036	0.173	21.5	4.8	C
133104	C 1	9.7	7.7	12.7	1.02	4.9	5.76	0.382	0.302	0.500	0.040	0.192	32.9	4.8	C
133204	C 1	9.6	7.2	12.7	1.22	6.1	12.39	0.378	0.282	0.500	0.048	0.240	70.8	5.0	C
133304	C 1	9.8	7.0	12.7	1.42	7.5	21.21	0.386	0.274	0.500	0.056	0.294	121.1	5.3	D
133404	C 1	9.6	6.3	12.7	1.63	8.5	42.05	0.378	0.250	0.500	0.064	0.336	240.1	5.3	D
C1-3134-2M	C 1	9.6	8.2	15.9	0.71	3.5	1.21	0.378	0.322	0.625	0.028	0.140	6.9	5.0	C
132905	C 1	9.5	7.9	15.9	0.81	4.5	1.89	0.374	0.310	0.625	0.032	0.176	10.8	5.5	C
133005	C 1	9.6	7.8	15.9	0.91	5.1	2.93	0.378	0.306	0.625	0.036	0.202	16.7	5.6	C
133105	C 1	9.7	7.7	15.9	1.02	5.7	4.48	0.382	0.302	0.625	0.040	0.224	25.6	5.6	C
133205	C 1	9.6	7.2	15.9	1.22	7.0	9.91	0.378	0.282	0.625	0.048	0.276	56.6	5.8	C
133305	C 1	9.8	7.0	15.9	1.42	8.5	17.23	0.386	0.274	0.625	0.056	0.336	98.4	6.0	D
133405	C 1	9.6	6.3	15.9	1.63	10.2	32.15	0.378	0.250	0.625	0.064	0.400	183.6	6.3	D
C1-3434-2M	C 1	9.6	8.2	17.5	0.71	3.8	1.09	0.378	0.322	0.689	0.028	0.149	6.2	5.3	C
C1-3437-2M	C 1	9.5	7.9	17.5	0.81	4.8	1.71	0.374	0.310	0.689	0.032	0.188	9.8	5.9	C
C1-3440-2M	C 1	9.6	7.8	17.5	0.91	5.7	2.52	0.378	0.306	0.689	0.036	0.223	14.4	6.2	C
C1-3443-2M	C 1	9.7	7.7	17.5	1.02	6.6	3.61	0.382	0.302	0.689	0.040	0.259	20.6	6.5	C
C1-3447-2M	C 1	9.6	7.2	17.5	1.22	8.6	7.37	0.378	0.282	0.689	0.048	0.338	42.1	7.0	C
C1-3634-2M	C 1	9.6	8.2	19.1	0.71	4.0	0.99	0.378	0.322	0.750	0.028	0.158	5.7	5.6	C
132906	C 1	9.5	7.9	19.1	0.81	5.1	1.55	0.374	0.310	0.750	0.032	0.200	8.9	6.3	C
133006	C 1	9.6	7.8	19.1	0.91	5.8	2.40	0.378	0.306	0.750	0.036	0.230	13.7	6.4	C
133106	C 1	9.7	7.7	19.1	1.02	6.5	3.67	0.382	0.302	0.750	0.040	0.256	20.9	6.4	C
133206	C 1	9.6	7.2	19.1	1.22	7.9	8.26	0.378	0.282	0.750	0.048	0.312	47.2	6.5	C
133306	C 1	9.8	7.0	19.1	1.42	9.6	14.51	0.386	0.274	0.750	0.056	0.378	82.9	6.8	D

For Sales or Assistance - Tel 0117 967 3313

All characteristics are nominal


Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No. of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	lbs/in		
133406	C 1	9.6	6.3	19.1	1.63	11.8	26.03	0.378	0.250	0.750	0.064	0.464	148.6	7.3	D
C1-3834-2M	C 1	9.6	8.2	22.2	0.71	4.5	0.84	0.378	0.322	0.875	0.028	0.176	4.8	6.3	C
C1-3837-2M	C 1	9.5	7.9	22.2	0.81	5.7	1.32	0.374	0.310	0.875	0.032	0.224	7.5	7.0	C
C1-3840-2M	C 1	9.6	7.8	22.2	0.91	6.8	1.93	0.378	0.306	0.875	0.036	0.269	11.0	7.5	C
C1-3843-2M	C 1	9.7	7.7	22.2	1.02	8.0	2.77	0.382	0.302	0.875	0.040	0.313	15.8	7.8	C
C1-3847-2M	C 1	9.6	7.2	22.2	1.22	10.5	5.61	0.378	0.282	0.875	0.048	0.414	32.0	8.6	D
C1-3851-2M	C 1	9.8	7.0	22.2	1.42	12.5	10.12	0.386	0.274	0.875	0.056	0.493	57.8	8.8	D
C1-3854-2M	C 1	9.6	6.3	22.2	1.63	14.8	19.24	0.378	0.250	0.875	0.064	0.583	109.9	9.1	E
C1-4134-2M	C 1	9.6	8.2	25.4	0.71	4.9	0.73	0.378	0.322	1.000	0.028	0.195	4.2	6.9	C
132908	C 1	9.5	7.9	25.4	0.81	6.2	1.18	0.374	0.310	1.000	0.032	0.243	6.7	7.6	C
133008	C 1	9.6	7.8	25.4	0.91	7.2	1.79	0.378	0.306	1.000	0.036	0.284	10.2	7.9	C
133108	C 1	9.7	7.7	25.4	1.02	8.0	2.73	0.382	0.302	1.000	0.040	0.316	15.6	7.9	C
133208	C 1	9.6	7.2	25.4	1.22	10.1	5.95	0.378	0.282	1.000	0.048	0.396	34.0	8.3	D
133308	C 1	9.8	7.0	25.4	1.42	12.4	10.21	0.386	0.274	1.000	0.056	0.490	58.3	8.8	D
133408	C 1	9.6	6.3	25.4	1.63	15.0	18.85	0.378	0.250	1.000	0.064	0.592	107.6	9.3	E
C1-4234-2M	C 1	9.6	8.2	27.5	0.71	5.2	0.67	0.378	0.322	1.083	0.028	0.207	3.8	7.4	C
C1-4237-2M	C 1	9.5	7.9	27.5	0.81	6.7	1.05	0.374	0.310	1.083	0.032	0.265	6.0	8.3	C
C1-4240-2M	C 1	9.6	7.8	27.5	0.91	8.1	1.54	0.378	0.306	1.083	0.036	0.319	8.8	8.9	C
C1-4243-2M	C 1	9.7	7.7	27.5	1.02	9.5	2.19	0.382	0.302	1.083	0.040	0.374	12.5	9.4	C
C1-4247-2M	C 1	9.6	7.2	27.5	1.22	12.7	4.43	0.378	0.282	1.083	0.048	0.499	25.3	10.4	D
C1-4251-2M	C 1	9.8	7.0	27.5	1.42	15.2	7.96	0.386	0.274	1.083	0.056	0.597	45.4	10.7	D
C1-4254-2M	C 1	9.6	6.3	27.5	1.63	18.0	15.06	0.378	0.250	1.083	0.064	0.709	86.0	11.1	E
C1-4434-2M	C 1	9.6	8.2	31.8	0.71	5.9	0.58	0.378	0.322	1.250	0.028	0.231	3.3	8.3	C
132910	C 1	9.5	7.9	31.8	0.81	7.4	0.93	0.374	0.310	1.250	0.032	0.291	5.3	9.1	C
133010	C 1	9.6	7.8	31.8	0.91	8.5	1.45	0.378	0.306	1.250	0.036	0.335	8.3	9.3	C
133110	C 1	9.7	7.7	31.8	1.02	9.6	2.18	0.382	0.302	1.250	0.040	0.376	12.4	9.4	D
133210	C 1	9.6	7.2	31.8	1.22	12.2	4.65	0.378	0.282	1.250	0.048	0.480	26.5	10.0	D
133310	C 1	9.8	7.0	31.8	1.42	14.9	8.11	0.386	0.274	1.250	0.056	0.588	46.3	10.5	D
133410	C 1	9.6	6.3	31.8	1.63	18.3	14.77	0.378	0.250	1.250	0.064	0.720	84.4	11.3	E
C1-4634-2M	C 1	9.6	8.2	38.1	0.71	6.8	0.48	0.378	0.322	1.500	0.028	0.268	2.7	9.6	C
132912	C 1	9.5	7.9	38.1	0.81	8.7	0.76	0.374	0.310	1.500	0.032	0.342	4.3	10.7	C
133012	C 1	9.6	7.8	38.1	0.91	9.9	1.20	0.378	0.306	1.500	0.036	0.389	6.8	10.8	C
133112	C 1	9.7	7.7	38.1	1.02	11.1	1.81	0.382	0.302	1.500	0.040	0.436	10.3	10.9	D
133212	C 1	9.6	7.2	38.1	1.22	14.0	3.91	0.378	0.282	1.500	0.048	0.552	22.3	11.5	D
133312	C 1	9.8	7.0	38.1	1.42	17.4	6.72	0.386	0.274	1.500	0.056	0.686	38.4	12.3	E
133412	C 1	9.6	6.3	38.1	1.63	21.1	12.42	0.378	0.250	1.500	0.064	0.832	70.9	13.0	E
132914	C 1	9.5	7.9	44.5	0.81	9.8	0.66	0.374	0.310	1.750	0.032	0.384	3.8	12.0	C
133014	C 1	9.6	7.8	44.5	0.91	11.3	1.02	0.378	0.306	1.750	0.036	0.446	5.8	12.4	D
133114	C 1	9.7	7.7	44.5	1.02	13.0	1.49	0.382	0.302	1.750	0.040	0.512	8.5	12.8	D
133214	C 1	9.6	7.2	44.5	1.22	16.2	3.30	0.378	0.282	1.750	0.048	0.636	18.9	13.3	D
133314	C 1	9.8	7.0	44.5	1.42	19.9	5.74	0.386	0.274	1.750	0.056	0.784	32.8	14.0	E
133414	C 1	9.6	6.3	44.5	1.63	24.4	10.51	0.378	0.250	1.750	0.064	0.960	60.0	15.0	E
132916	C 1	9.5	7.9	50.8	0.81	11.0	0.57	0.374	0.310	2.000	0.032	0.432	3.3	13.5	D
133016	C 1	9.6	7.8	50.8	0.91	12.6	0.89	0.378	0.306	2.000	0.036	0.497	5.1	13.8	D
133116	C 1	9.7	7.7	50.8	1.02	14.2	1.34	0.382	0.302	2.000	0.040	0.560	7.7	14.0	D
133216	C 1	9.6	7.2	50.8	1.22	18.0	2.92	0.378	0.282	2.000	0.048	0.708	16.7	14.8	D
133316	C 1	9.8	7.0	50.8	1.42	22.4	5.01	0.386	0.274	2.000	0.056	0.882	28.6	15.8	E
133416	C 1	9.6	6.3	50.8	1.63	27.2	9.26	0.378	0.250	2.000	0.064	1.072	52.9	16.8	E
132920	C 1	9.5	7.9	63.5	0.81	13.5	0.45	0.374	0.310	2.500	0.032	0.531	2.6	16.6	D
133020	C 1	9.6	7.8	63.5	0.91	15.2	0.72	0.378	0.306	2.500	0.036	0.597	4.1	16.6	D
133120	C 1	9.7	7.7	63.5	1.02	17.6	1.05	0.382	0.302	2.500	0.040	0.692	6.0	17.3	D

Choose from millions of sizes - www.flexosprings.com

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	lbs/in		
133220	C 1	9.6	7.2	63.5	1.22	22.2	2.29	0.378	0.282	2.500	0.048	0.876	13.1	18.3	E
133320	C 1	9.8	7.0	63.5	1.42	27.4	4.00	0.386	0.274	2.500	0.056	1.078	22.8	19.3	E
133420	C 1	9.6	6.3	63.5	1.63	33.7	7.29	0.378	0.250	2.500	0.064	1.328	41.6	20.8	F
132924	C 1	9.5	7.9	76.2	0.81	15.9	0.38	0.374	0.310	3.000	0.032	0.624	2.2	19.5	D
133024	C 1	9.6	7.8	76.2	0.91	18.0	0.60	0.378	0.306	3.000	0.036	0.709	3.4	19.7	D
133124	C 1	9.7	7.7	76.2	1.02	20.7	0.88	0.382	0.302	3.000	0.040	0.816	5.0	20.4	E
133224	C 1	9.6	7.2	76.2	1.22	26.2	1.91	0.378	0.282	3.000	0.048	1.032	10.9	21.5	E
133324	C 1	9.8	7.0	76.2	1.42	32.4	3.32	0.386	0.274	3.000	0.056	1.274	19.0	22.8	F
133424	C 1	9.6	6.3	76.2	1.63	39.8	6.07	0.378	0.250	3.000	0.064	1.568	34.7	24.5	F
132928	C 1	9.5	7.9	88.9	0.81	18.1	0.33	0.374	0.310	3.500	0.032	0.714	1.9	22.3	D
133028	C 1	9.6	7.8	88.9	0.91	20.8	0.51	0.378	0.306	3.500	0.036	0.820	2.9	22.8	E
133128	C 1	9.7	7.7	88.9	1.02	23.9	0.75	0.382	0.302	3.500	0.040	0.940	4.3	23.5	E
133228	C 1	9.6	7.2	88.9	1.22	30.2	1.63	0.378	0.282	3.500	0.048	1.188	9.3	24.8	E
133328	C 1	9.8	7.0	88.9	1.42	37.3	2.84	0.386	0.274	3.500	0.056	1.470	16.2	26.3	F
133428	C 1	9.6	6.3	88.9	1.63	46.3	5.16	0.378	0.250	3.500	0.064	1.824	29.4	28.5	F
C2-2737-2M	C 2	10.4	8.8	12.7	0.81	3.5	2.16	0.409	0.345	0.500	0.032	0.137	12.4	4.3	C
143004	C 2	10.4	8.6	12.7	0.91	4.1	3.24	0.409	0.337	0.500	0.036	0.162	18.5	4.5	C
143104	C 2	10.5	8.5	12.7	1.02	4.7	4.76	0.413	0.333	0.500	0.040	0.184	27.2	4.6	C
143204	C 2	10.3	7.9	12.7	1.22	5.9	10.44	0.406	0.310	0.500	0.048	0.230	59.6	4.8	C
143304	C 2	10.5	7.7	12.7	1.42	6.8	19.35	0.413	0.301	0.500	0.056	0.269	110.5	4.8	D
143404	C 2	10.3	7.0	12.7	1.63	8.3	34.25	0.406	0.277	0.500	0.064	0.326	195.6	5.1	D
143504	C 2	10.2	6.5	12.7	1.83	9.6	58.19	0.402	0.258	0.500	0.072	0.378	332.2	5.3	E
C2-3040-2M	C 2	10.0	8.2	15.0	0.91	4.8	2.81	0.394	0.322	0.591	0.036	0.190	16.1	5.3	C
C2-3043-2M	C 2	10.0	8.0	15.0	1.02	5.6	4.10	0.394	0.314	0.591	0.040	0.222	23.4	5.6	C
C2-3045-2M	C 2	10.0	7.8	15.0	1.12	6.5	5.88	0.394	0.306	0.591	0.044	0.255	33.6	5.8	C
C2-3137-2M	C 2	10.4	8.8	15.9	0.81	4.0	1.68	0.409	0.345	0.625	0.032	0.158	9.6	4.9	C
143005	C 2	10.4	8.6	15.9	0.91	4.8	2.49	0.409	0.337	0.625	0.036	0.189	14.2	5.3	C
143105	C 2	10.5	8.5	15.9	1.02	5.5	3.64	0.413	0.333	0.625	0.040	0.216	20.8	5.4	C
143205	C 2	10.3	7.9	15.9	1.22	6.8	8.12	0.406	0.310	0.625	0.048	0.269	46.4	5.6	C
143305	C 2	10.5	7.7	15.9	1.42	8.2	14.26	0.413	0.301	0.625	0.056	0.325	81.4	5.8	D
143405	C 2	10.3	7.0	15.9	1.63	9.6	27.22	0.406	0.277	0.625	0.064	0.378	155.4	5.9	D
143505	C 2	10.2	6.5	15.9	1.83	11.4	44.50	0.402	0.258	0.625	0.072	0.450	254.1	6.3	E
C2-3437-2M	C 2	10.4	8.8	17.5	0.81	4.3	1.51	0.409	0.345	0.689	0.032	0.168	8.6	5.3	C
C2-3440-2M	C 2	10.4	8.6	17.5	0.91	5.1	2.23	0.409	0.337	0.689	0.036	0.203	12.7	5.6	C
C2-3443-2M	C 2	10.5	8.5	17.5	1.02	6.0	3.18	0.413	0.333	0.689	0.040	0.236	18.2	5.9	C
C2-3447-2M	C 2	10.3	7.9	17.5	1.22	8.0	6.45	0.406	0.310	0.689	0.048	0.314	36.8	6.5	C
C2-3637-2M	C 2	10.4	8.8	19.1	0.81	4.5	1.38	0.409	0.345	0.750	0.032	0.178	7.9	5.6	C
143006	C 2	10.4	8.6	19.1	0.91	5.3	2.13	0.409	0.337	0.750	0.036	0.209	12.2	5.8	C
143106	C 2	10.5	8.5	19.1	1.02	6.2	3.02	0.413	0.333	0.750	0.040	0.244	17.2	6.1	C
143206	C 2	10.3	7.9	19.1	1.22	7.8	6.64	0.406	0.310	0.750	0.048	0.307	37.9	6.4	C
143306	C 2	10.5	7.7	19.1	1.42	9.4	11.78	0.413	0.301	0.750	0.056	0.369	67.2	6.6	D
143406	C 2	10.3	7.0	19.1	1.63	11.2	21.67	0.406	0.277	0.750	0.064	0.442	123.7	6.9	D
143506	C 2	10.2	6.5	19.1	1.83	13.3	36.02	0.402	0.258	0.750	0.072	0.522	205.7	7.3	E
C2-3740-2M	C 2	10.0	8.2	20.0	0.91	6.0	2.04	0.394	0.322	0.787	0.036	0.235	11.6	6.5	C
M205304	C 2	10.0	8.0	20.0	1.02	7.6	2.65	0.394	0.314	0.787	0.040	0.300	15.1	7.5	C
M205504	C 2	10.0	7.8	20.0	1.12	8.7	3.87	0.394	0.306	0.787	0.044	0.342	22.1	7.8	C
M205704	C 2	10.0	7.6	20.0	1.22	9.3	5.77	0.394	0.298	0.787	0.048	0.365	33.0	7.6	D
M205904	C 2	10.0	7.2	20.0	1.42	11.4	10.70	0.394	0.282	0.787	0.056	0.448	61.1	8.0	D
C2-3837-2M	C 2	10.4	8.8	22.2	0.81	5.1	1.16	0.409	0.345	0.875	0.032	0.199	6.6	6.2	C
C2-3840-2M	C 2	10.4	8.6	22.2	0.91	6.1	1.71	0.409	0.337	0.875	0.036	0.242	9.8	6.7	C
C2-3843-2M	C 2	10.5	8.5	22.2	1.02	7.2	2.44	0.413	0.333	0.875	0.040	0.283	13.9	7.1	C

For Sales or Assistance - Tel 0117 967 3313

All characteristics are nominal

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	Lbs/in		
C2-3847-2M	C 2	10.3	7.9	22.2	1.22	9.7	4.91	0.406	0.310	0.875	0.048	0.382	28.0	8.0	D
C2-3851-2M	C 2	10.5	7.7	22.2	1.42	11.7	8.73	0.413	0.301	0.875	0.056	0.459	49.9	8.2	D
C2-3854-2M	C 2	10.3	7.0	22.2	1.63	13.9	16.19	0.406	0.277	0.875	0.064	0.548	92.4	8.6	E
C2-4040-2M	C 2	10.0	8.2	25.0	0.91	7.1	1.60	0.394	0.322	0.984	0.036	0.279	9.1	7.8	C
M205305	C 2	10.0	8.0	25.0	1.02	9.1	2.08	0.394	0.314	0.984	0.040	0.360	11.9	9.0	C
M205505	C 2	10.0	7.8	25.0	1.12	10.4	3.07	0.394	0.306	0.984	0.044	0.408	17.5	9.3	D
M205705	C 2	10.0	7.6	25.0	1.22	11.1	4.55	0.394	0.298	0.984	0.048	0.437	26.0	9.1	D
M205905	C 2	10.0	7.2	25.0	1.42	13.9	8.29	0.394	0.282	0.984	0.056	0.546	47.3	9.8	D
C2-4137-2M	C 2	10.4	8.8	25.4	0.81	5.6	1.01	0.409	0.345	1.000	0.032	0.220	5.8	6.9	C
143008	C 2	10.4	8.6	25.4	0.91	6.8	1.50	0.409	0.337	1.000	0.036	0.266	8.6	7.4	C
143108	C 2	10.5	8.5	25.4	1.02	7.5	2.29	0.413	0.333	1.000	0.040	0.296	13.1	7.4	C
143208	C 2	10.3	7.9	25.4	1.22	9.4	5.13	0.406	0.310	1.000	0.048	0.370	29.3	7.7	D
143308	C 2	10.5	7.7	25.4	1.42	11.7	8.74	0.413	0.301	1.000	0.056	0.459	49.9	8.2	D
143408	C 2	10.3	7.0	25.4	1.63	14.1	15.85	0.406	0.277	1.000	0.064	0.557	90.5	8.7	E
143508	C 2	10.2	6.5	25.4	1.83	16.5	27.02	0.402	0.258	1.000	0.072	0.648	154.3	9.0	E
C2-4237-2M	C 2	10.4	8.8	27.5	0.81	5.9	0.93	0.409	0.345	1.083	0.032	0.234	5.3	7.3	C
C2-4240-2M	C 2	10.4	8.6	27.5	0.91	7.3	1.36	0.409	0.337	1.083	0.036	0.286	7.8	7.9	C
C2-4243-2M	C 2	10.5	8.5	27.5	1.02	8.5	1.93	0.413	0.333	1.083	0.040	0.336	11.0	8.4	C
C2-4247-2M	C 2	10.3	7.9	27.5	1.22	11.6	3.88	0.406	0.310	1.083	0.048	0.458	22.1	9.5	D
C2-4251-2M	C 2	10.5	7.7	27.5	1.42	14.1	6.87	0.413	0.301	1.083	0.056	0.554	39.2	9.9	D
C2-4254-2M	C 2	10.3	7.0	27.5	1.63	16.9	12.67	0.406	0.277	1.083	0.064	0.664	72.4	10.4	E
C2-4340-2M	C 2	10.0	8.2	30.0	0.91	8.2	1.32	0.394	0.322	1.181	0.036	0.324	7.5	9.0	C
M205306	C 2	10.0	8.0	30.0	1.02	10.7	1.71	0.394	0.314	1.181	0.040	0.420	9.8	10.5	D
M205506	C 2	10.0	7.8	30.0	1.12	12.3	2.47	0.394	0.306	1.181	0.044	0.485	14.1	11.0	D
M205706	C 2	10.0	7.6	30.0	1.22	13.0	3.72	0.394	0.298	1.181	0.048	0.514	21.2	10.7	D
M205906	C 2	10.0	7.2	30.0	1.42	16.7	6.59	0.394	0.282	1.181	0.056	0.658	37.6	11.8	E
C2-4437-2M	C 2	10.4	8.8	31.8	0.81	6.6	0.80	0.409	0.345	1.250	0.032	0.262	4.5	8.2	C
143010	C 2	10.4	8.6	31.8	0.91	8.0	1.21	0.409	0.337	1.250	0.036	0.313	6.9	8.7	C
143110	C 2	10.5	8.5	31.8	1.02	9.0	1.79	0.413	0.333	1.250	0.040	0.356	10.2	8.9	D
143210	C 2	10.3	7.9	31.8	1.22	11.6	3.90	0.406	0.310	1.250	0.048	0.456	22.3	9.5	D
143310	C 2	10.5	7.7	31.8	1.42	13.8	7.04	0.413	0.301	1.250	0.056	0.543	40.2	9.7	D
143410	C 2	10.3	7.0	31.8	1.63	17.1	12.49	0.406	0.277	1.250	0.064	0.672	71.3	10.5	E
143510	C 2	10.2	6.5	31.8	1.83	20.1	21.01	0.402	0.258	1.250	0.072	0.792	120.0	11.0	E
C2-4540-2M	C 2	10.0	8.2	35.0	0.91	9.4	1.12	0.394	0.322	1.378	0.036	0.369	6.4	10.3	C
C2-4543-2M	C 2	10.0	8.0	35.0	1.02	11.2	1.61	0.394	0.314	1.378	0.040	0.441	9.2	11.0	D
C2-4545-2M	C 2	10.0	7.8	35.0	1.12	13.1	2.29	0.394	0.306	1.378	0.044	0.517	13.1	11.7	D
C2-4547-2M	C 2	10.0	7.6	35.0	1.22	14.9	3.15	0.394	0.298	1.378	0.048	0.588	18.0	12.3	D
C2-4551-2M	C 2	10.0	7.2	35.0	1.42	18.5	5.84	0.394	0.282	1.378	0.056	0.728	33.3	13.0	E
C2-4637-2M	C 2	10.4	8.8	38.1	0.81	7.7	0.66	0.409	0.345	1.500	0.032	0.303	3.8	9.5	C
143012	C 2	10.4	8.6	38.1	0.91	9.0	1.03	0.409	0.337	1.500	0.036	0.356	5.9	9.9	C
143112	C 2	10.5	8.5	38.1	1.02	10.4	1.51	0.413	0.333	1.500	0.040	0.408	8.6	10.2	D
143212	C 2	10.3	7.9	38.1	1.22	13.2	3.32	0.406	0.310	1.500	0.048	0.518	19.0	10.8	D
143312	C 2	10.5	7.7	38.1	1.42	16.4	5.70	0.413	0.301	1.500	0.056	0.644	32.6	11.5	E
143412	C 2	10.3	7.0	38.1	1.63	20.2	10.21	0.406	0.277	1.500	0.064	0.794	58.3	12.4	E
143512	C 2	10.2	6.5	38.1	1.83	23.3	17.59	0.402	0.258	1.500	0.072	0.918	100.4	12.8	E
C2-4740-2M	C 2	10.0	8.2	40.0	0.91	10.5	0.97	0.394	0.322	1.575	0.036	0.414	5.5	11.5	D
M205308	C 2	10.0	8.0	40.0	1.02	13.7	1.27	0.394	0.314	1.575	0.040	0.540	7.2	13.5	D
M205508	C 2	10.0	7.8	40.0	1.12	16.0	1.82	0.394	0.306	1.575	0.044	0.628	10.4	14.3	D
M205708	C 2	10.0	7.6	40.0	1.22	16.9	2.72	0.394	0.298	1.575	0.048	0.667	15.5	13.9	D
M205908	C 2	10.0	7.2	40.0	1.42	21.7	4.85	0.394	0.282	1.575	0.056	0.854	27.7	15.3	E
143014	C 2	10.4	8.6	44.5	0.91	10.4	0.86	0.409	0.337	1.750	0.036	0.410	4.9	11.4	D

Choose from millions of sizes - www.flexosprings.com

Compression Springs




FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	lbs/in	approx	
143114	C 2	10.5	8.5	44.5	1.02	11.9	1.28	0.413	0.333	1.750	0.040	0.468	7.3	11.7	D
143214	C 2	10.3	7.9	44.5	1.22	15.0	2.84	0.406	0.310	1.750	0.048	0.590	16.2	12.3	D
143314	C 2	10.5	7.7	44.5	1.42	18.5	4.93	0.413	0.301	1.750	0.056	0.728	28.1	13.0	E
143414	C 2	10.3	7.0	44.5	1.63	22.6	8.92	0.406	0.277	1.750	0.064	0.890	50.9	13.9	E
143514	C 2	10.2	6.5	44.5	1.83	27.0	14.83	0.402	0.258	1.750	0.072	1.062	84.7	14.8	E
M205310	C 2	10.0	8.0	50.0	1.02	16.8	1.00	0.394	0.314	1.969	0.040	0.660	5.7	16.5	D
M205510	C 2	10.0	7.8	50.0	1.12	19.6	1.44	0.394	0.306	1.969	0.044	0.772	8.2	17.5	D
M205710	C 2	10.0	7.6	50.0	1.22	20.7	2.16	0.394	0.298	1.969	0.048	0.816	12.3	17.0	E
M205910	C 2	10.0	7.2	50.0	1.42	27.0	3.78	0.394	0.282	1.969	0.056	1.064	21.6	19.0	E
143016	C 2	10.4	8.6	50.8	0.91	11.6	0.76	0.409	0.337	2.000	0.036	0.457	4.3	12.7	D
143116	C 2	10.5	8.5	50.8	1.02	13.2	1.13	0.413	0.333	2.000	0.040	0.520	6.4	13.0	D
143216	C 2	10.3	7.9	50.8	1.22	16.8	2.48	0.406	0.310	2.000	0.048	0.662	14.1	13.8	D
143316	C 2	10.5	7.7	50.8	1.42	21.0	4.23	0.413	0.301	2.000	0.056	0.829	24.2	14.8	E
143416	C 2	10.3	7.0	50.8	1.63	25.5	7.75	0.406	0.277	2.000	0.064	1.005	44.3	15.7	E
143516	C 2	10.2	6.5	50.8	1.83	30.2	13.04	0.402	0.258	2.000	0.072	1.188	74.5	16.5	F
M205312	C 2	10.0	8.0	60.0	1.02	19.8	0.83	0.394	0.314	2.362	0.040	0.780	4.8	19.5	D
M205512	C 2	10.0	7.8	60.0	1.12	23.2	1.19	0.394	0.306	2.362	0.044	0.915	6.8	20.8	E
M205712	C 2	10.0	7.6	60.0	1.22	24.6	1.78	0.394	0.298	2.362	0.048	0.969	10.1	20.2	E
M205912	C 2	10.0	7.2	60.0	1.42	32.0	3.13	0.394	0.282	2.362	0.056	1.260	17.9	22.5	E
143020	C 2	10.4	8.6	63.5	0.91	14.2	0.60	0.409	0.337	2.500	0.036	0.558	3.4	15.5	D
143120	C 2	10.5	8.5	63.5	1.02	16.1	0.90	0.413	0.333	2.500	0.040	0.632	5.1	15.8	D
143220	C 2	10.3	7.9	63.5	1.22	20.5	1.97	0.406	0.310	2.500	0.048	0.806	11.3	16.8	E
143320	C 2	10.5	7.7	63.5	1.42	25.3	3.43	0.413	0.301	2.500	0.056	0.997	19.6	17.8	E
143420	C 2	10.3	7.0	63.5	1.63	31.2	6.17	0.406	0.277	2.500	0.064	1.229	35.2	19.2	F
143520	C 2	10.2	6.5	63.5	1.83	37.0	10.36	0.402	0.258	2.500	0.072	1.458	59.2	20.3	F
M205314	C 2	10.0	8.0	70.0	1.02	22.9	0.71	0.394	0.314	2.756	0.040	0.900	4.1	22.5	E
M205514	C 2	10.0	7.8	70.0	1.12	26.9	1.01	0.394	0.306	2.756	0.044	1.058	5.8	24.0	E
M205714	C 2	10.0	7.6	70.0	1.22	28.5	1.51	0.394	0.298	2.756	0.048	1.123	8.6	23.4	E
M205914	C 2	10.0	7.2	70.0	1.42	37.3	2.65	0.394	0.282	2.756	0.056	1.470	15.1	26.3	F
143024	C 2	10.4	8.6	76.2	0.91	16.5	0.51	0.409	0.337	3.000	0.036	0.648	2.9	18.0	D
143124	C 2	10.5	8.5	76.2	1.02	19.1	0.74	0.413	0.333	3.000	0.040	0.752	4.2	18.8	E
143224	C 2	10.3	7.9	76.2	1.22	24.3	1.63	0.406	0.310	3.000	0.048	0.955	9.3	19.9	E
143324	C 2	10.5	7.7	76.2	1.42	30.0	2.84	0.413	0.301	3.000	0.056	1.181	16.2	21.1	F
143424	C 2	10.3	7.0	76.2	1.63	36.9	5.13	0.406	0.277	3.000	0.064	1.453	29.3	22.7	F
143524	C 2	10.2	6.5	76.2	1.83	44.4	8.50	0.402	0.258	3.000	0.072	1.746	48.5	24.3	F
M205316	C 2	10.0	8.0	80.0	1.02	25.9	0.62	0.394	0.314	3.150	0.040	1.020	3.5	25.5	E
M205516	C 2	10.0	7.8	80.0	1.12	30.5	0.88	0.394	0.306	3.150	0.044	1.202	5.0	27.3	E
M205716	C 2	10.0	7.6	80.0	1.22	32.3	1.32	0.394	0.298	3.150	0.048	1.272	7.5	26.5	E
M205916	C 2	10.0	7.2	80.0	1.42	42.3	2.31	0.394	0.282	3.150	0.056	1.666	13.2	29.8	F
143028	C 2	10.4	8.6	88.9	0.91	19.1	0.43	0.409	0.337	3.500	0.036	0.752	2.4	20.9	E
143128	C 2	10.5	8.5	88.9	1.02	21.9	0.63	0.413	0.333	3.500	0.040	0.864	3.6	21.6	E
143228	C 2	10.3	7.9	88.9	1.22	28.0	1.39	0.406	0.310	3.500	0.048	1.104	7.9	23.0	E
143328	C 2	10.5	7.7	88.9	1.42	34.7	2.42	0.413	0.301	3.500	0.056	1.366	13.8	24.4	F
143428	C 2	10.3	7.0	88.9	1.63	42.8	4.37	0.406	0.277	3.500	0.064	1.684	24.9	26.3	F
143528	C 2	10.2	6.5	88.9	1.83	51.2	7.27	0.402	0.258	3.500	0.072	2.016	41.5	28.0	G
C3-3043-2M	C 3	11.0	9.0	15.0	1.02	5.1	3.53	0.433	0.353	0.591	0.040	0.200	20.2	5.0	C
C3-3045-2M	C 3	11.0	8.8	15.0	1.12	5.9	5.01	0.433	0.345	0.591	0.044	0.231	28.6	5.2	C
C3-3047-2M	C 3	11.0	8.6	15.0	1.22	6.6	6.87	0.433	0.337	0.591	0.048	0.259	39.3	5.4	C
153005	C 3	11.2	9.4	15.9	0.91	4.4	2.27	0.441	0.369	0.625	0.036	0.173	13.0	4.8	C
153105	C 3	11.3	9.3	15.9	1.02	5.1	3.24	0.445	0.365	0.625	0.040	0.200	18.5	5.0	C
153205	C 3	11.1	8.7	15.9	1.22	6.5	6.88	0.437	0.341	0.625	0.048	0.254	39.3	5.3	C

For Sales or Assistance - Tel 0117 967 3313

All characteristics are nominal


Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	Lbs/in	approx	
153305	C 3	11.3	8.5	15.9	1.42	7.5	12.94	0.445	0.333	0.625	0.056	0.294	73.9	5.3	D
153405	C 3	11.2	7.9	15.9	1.63	8.9	22.56	0.441	0.313	0.625	0.064	0.352	128.8	5.5	D
153505	C 3	11.0	7.3	15.9	1.83	10.5	38.35	0.433	0.289	0.625	0.072	0.414	219.0	5.8	E
C3-3440-2M	C 3	11.2	9.4	17.5	0.91	4.7	2.01	0.441	0.369	0.689	0.036	0.186	11.5	5.2	C
C3-3443-2M	C 3	11.3	9.3	17.5	1.02	5.5	2.85	0.445	0.365	0.689	0.040	0.217	16.2	5.4	C
C3-3447-2M	C 3	11.1	8.7	17.5	1.22	7.3	5.64	0.437	0.341	0.689	0.048	0.289	32.2	6.0	C
C3-3451-2M	C 3	11.1	8.3	17.5	1.42	9.0	10.32	0.437	0.325	0.689	0.056	0.354	58.9	6.3	D
153006	C 3	11.2	9.4	19.1	0.91	5.0	1.82	0.441	0.369	0.750	0.036	0.198	10.4	5.5	C
153106	C 3	11.3	9.3	19.1	1.02	5.9	2.56	0.445	0.365	0.750	0.040	0.232	14.6	5.8	C
153206	C 3	11.1	8.7	19.1	1.22	7.1	5.97	0.437	0.341	0.750	0.048	0.278	34.1	5.8	C
153306	C 3	11.3	8.5	19.1	1.42	8.7	10.26	0.445	0.333	0.750	0.056	0.342	58.6	6.1	D
153406	C 3	11.2	7.9	19.1	1.63	10.2	18.58	0.441	0.313	0.750	0.064	0.400	106.1	6.3	D
153506	C 3	11.0	7.3	19.1	1.83	12.3	30.28	0.433	0.289	0.750	0.072	0.486	172.9	6.8	E
C3-3743-2M	C 3	11.0	9.0	20.0	1.02	6.3	2.55	0.433	0.353	0.787	0.040	0.246	14.6	6.2	C
C3-3745-2M	C 3	11.0	8.8	20.0	1.12	7.3	3.60	0.433	0.345	0.787	0.044	0.286	20.5	6.5	C
C3-3747-2M	C 3	11.0	8.6	20.0	1.22	8.2	4.92	0.433	0.337	0.787	0.048	0.324	28.1	6.8	D
C3-3840-2M	C 3	11.2	9.4	22.2	0.91	5.6	1.54	0.441	0.369	0.875	0.036	0.220	8.8	6.1	C
C3-3843-2M	C 3	11.3	9.3	22.2	1.02	6.6	2.18	0.445	0.365	0.875	0.040	0.258	12.4	6.5	C
C3-3847-2M	C 3	11.1	8.7	22.2	1.22	8.9	4.30	0.437	0.341	0.875	0.048	0.349	24.5	7.3	D
C3-3851-2M	C 3	11.3	8.5	22.2	1.42	10.8	7.54	0.445	0.333	0.875	0.056	0.424	43.0	7.6	D
C3-3854-2M	C 3	11.2	7.9	22.2	1.63	12.9	13.35	0.441	0.313	0.875	0.064	0.507	76.2	7.9	E
C3-3857-2M	C 3	11.0	7.3	22.2	1.83	14.8	23.55	0.433	0.289	0.875	0.072	0.584	134.4	8.1	E
C3-4043-2M	C 3	11.0	9.0	25.0	1.02	7.4	1.99	0.433	0.353	0.984	0.040	0.293	11.4	7.3	C
M225505	C 3	11.0	8.8	25.0	1.12	9.2	2.59	0.433	0.345	0.984	0.044	0.364	14.8	8.3	D
M225705	C 3	11.0	8.6	25.0	1.22	9.9	3.83	0.433	0.337	0.984	0.048	0.389	21.9	8.1	D
M225905	C 3	11.0	8.2	25.0	1.42	12.8	6.59	0.433	0.321	0.984	0.056	0.504	37.6	9.0	D
M226005	C 3	11.0	8.0	25.0	1.50	13.5	8.36	0.433	0.315	0.984	0.059	0.531	47.7	9.0	D
153008	C 3	11.2	9.4	25.4	0.91	6.2	1.32	0.441	0.369	1.000	0.036	0.245	7.6	6.8	C
153108	C 3	11.3	9.3	25.4	1.02	7.0	1.98	0.445	0.365	1.000	0.040	0.276	11.3	6.9	C
153208	C 3	11.1	8.7	25.4	1.22	8.9	4.28	0.437	0.341	1.000	0.048	0.350	24.4	7.3	D
153308	C 3	11.3	8.5	25.4	1.42	10.5	7.79	0.445	0.333	1.000	0.056	0.414	44.5	7.4	D
153408	C 3	11.2	7.9	25.4	1.63	12.6	13.73	0.441	0.313	1.000	0.064	0.496	78.4	7.8	E
153508	C 3	11.0	7.3	25.4	1.83	15.1	23.01	0.433	0.289	1.000	0.072	0.594	131.4	8.3	E
C3-4240-2M	C 3	11.2	9.4	27.5	0.91	6.6	1.23	0.441	0.369	1.083	0.036	0.258	7.0	7.2	C
C3-4243-2M	C 3	11.3	9.3	27.5	1.02	7.7	1.73	0.445	0.365	1.083	0.040	0.305	9.9	7.6	C
C3-4247-2M	C 3	11.1	8.7	27.5	1.22	10.6	3.39	0.437	0.341	1.083	0.048	0.417	19.4	8.7	D
C3-4251-2M	C 3	11.3	8.5	27.5	1.42	12.9	5.92	0.445	0.333	1.083	0.056	0.509	33.8	9.1	D
C3-4254-2M	C 3	11.2	7.9	27.5	1.63	15.5	10.45	0.441	0.313	1.083	0.064	0.612	59.7	9.6	E
C3-4257-2M	C 3	11.0	7.3	27.5	1.83	18.0	18.34	0.433	0.289	1.083	0.072	0.709	104.7	9.8	E
C3-4343-2M	C 3	11.0	9.0	30.0	1.02	8.6	1.64	0.433	0.353	1.181	0.040	0.339	9.4	8.5	D
M225506	C 3	11.0	8.8	30.0	1.12	10.9	2.09	0.433	0.345	1.181	0.044	0.430	11.9	9.8	D
M225706	C 3	11.0	8.6	30.0	1.22	11.6	3.12	0.433	0.337	1.181	0.048	0.456	17.8	9.5	D
M225906	C 3	11.0	8.2	30.0	1.42	14.9	5.43	0.433	0.321	1.181	0.056	0.588	31.0	10.5	E
M226006	C 3	11.0	8.0	30.0	1.50	16.1	6.69	0.433	0.315	1.181	0.059	0.635	38.2	10.8	E
153010	C 3	11.2	9.4	31.8	0.91	7.3	1.06	0.441	0.369	1.250	0.036	0.288	6.0	8.0	C
153110	C 3	11.3	9.3	31.8	1.02	8.5	1.52	0.445	0.365	1.250	0.040	0.336	8.7	8.4	D
153210	C 3	11.1	8.7	31.8	1.22	10.5	3.44	0.437	0.341	1.250	0.048	0.413	19.6	8.6	D
153310	C 3	11.3	8.5	31.8	1.42	12.7	6.09	0.445	0.333	1.250	0.056	0.498	34.8	8.9	D
153410	C 3	11.2	7.9	31.8	1.63	15.4	10.53	0.441	0.313	1.250	0.064	0.608	60.1	9.5	E
153510	C 3	11.0	7.3	31.8	1.83	18.7	17.43	0.433	0.289	1.250	0.072	0.738	99.5	10.3	E
C3-4543-2M	C 3	11.0	9.0	35.0	1.02	9.8	1.39	0.433	0.353	1.378	0.040	0.385	7.9	9.6	D

Choose from millions of sizes - www.flexosprings.com

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	lbs/in	approx	
C3-4545-2M	C 3	11.0	8.8	35.0	1.12	11.5	1.95	0.433	0.345	1.378	0.044	0.454	11.1	10.3	D
C3-4547-2M	C 3	11.0	8.6	35.0	1.22	13.2	2.65	0.433	0.337	1.378	0.048	0.519	15.1	10.8	D
C3-4551-2M	C 3	11.0	8.2	35.0	1.42	16.5	4.79	0.433	0.321	1.378	0.056	0.651	27.4	11.6	E
C3-4552-2M	C 3	11.0	8.0	35.0	1.50	17.8	5.92	0.433	0.315	1.378	0.059	0.702	33.8	11.9	E
153012	C 3	11.2	9.4	38.1	0.91	8.5	0.87	0.441	0.369	1.500	0.036	0.335	5.0	9.3	C
153112	C 3	11.3	9.3	38.1	1.02	9.9	1.26	0.445	0.365	1.500	0.040	0.388	7.2	9.7	D
153212	C 3	11.1	8.7	38.1	1.22	12.1	2.87	0.437	0.341	1.500	0.048	0.475	16.4	9.9	D
153312	C 3	11.3	8.5	38.1	1.42	14.9	4.95	0.445	0.333	1.500	0.056	0.588	28.2	10.5	E
153412	C 3	11.2	7.9	38.1	1.63	17.9	8.77	0.441	0.313	1.500	0.064	0.704	50.1	11.0	E
153512	C 3	11.0	7.3	38.1	1.83	21.5	14.75	0.433	0.289	1.500	0.072	0.846	84.2	11.8	E
M225508	C 3	11.0	8.8	40.0	1.12	14.0	1.54	0.433	0.345	1.575	0.044	0.551	8.8	12.5	D
M225708	C 3	11.0	8.6	40.0	1.22	14.9	2.29	0.433	0.337	1.575	0.048	0.586	13.1	12.2	D
M225908	C 3	11.0	8.2	40.0	1.42	19.6	3.93	0.433	0.321	1.575	0.056	0.770	22.4	13.8	E
M226008	C 3	11.0	8.0	40.0	1.50	21.0	4.88	0.433	0.315	1.575	0.059	0.827	27.9	14.0	E
153014	C 3	11.2	9.4	44.5	0.91	9.7	0.74	0.441	0.369	1.750	0.036	0.381	4.2	10.6	D
153114	C 3	11.3	9.3	44.5	1.02	11.1	1.09	0.445	0.365	1.750	0.040	0.436	6.2	10.9	D
153214	C 3	11.1	8.7	44.5	1.22	14.0	2.39	0.437	0.341	1.750	0.048	0.552	13.6	11.5	D
153314	C 3	11.3	8.5	44.5	1.42	17.1	4.21	0.445	0.333	1.750	0.056	0.672	24.0	12.0	E
153414	C 3	11.2	7.9	44.5	1.63	20.3	7.52	0.441	0.313	1.750	0.064	0.800	42.9	12.5	E
153514	C 3	11.0	7.3	44.5	1.83	24.7	12.51	0.433	0.289	1.750	0.072	0.972	71.4	13.5	E
M225510	C 3	11.0	8.8	50.0	1.12	17.1	1.22	0.433	0.345	1.969	0.044	0.672	7.0	15.3	D
M225710	C 3	11.0	8.6	50.0	1.22	18.2	1.81	0.433	0.337	1.969	0.048	0.715	10.4	14.9	E
M225910	C 3	11.0	8.2	50.0	1.42	24.2	3.08	0.433	0.321	1.969	0.056	0.952	17.6	17.0	E
M226010	C 3	11.0	8.0	50.0	1.50	25.9	3.84	0.433	0.315	1.969	0.059	1.019	21.9	17.3	E
153016	C 3	11.2	9.4	50.8	0.91	10.9	0.64	0.441	0.369	2.000	0.036	0.428	3.7	11.9	D
153116	C 3	11.3	9.3	50.8	1.02	12.4	0.95	0.445	0.365	2.000	0.040	0.488	5.4	12.2	D
153216	C 3	11.1	8.7	50.8	1.22	15.5	2.12	0.437	0.341	2.000	0.048	0.610	12.1	12.7	D
153316	C 3	11.3	8.5	50.8	1.42	18.9	3.72	0.445	0.333	2.000	0.056	0.745	21.2	13.3	E
153416	C 3	11.2	7.9	50.8	1.63	23.2	6.45	0.441	0.313	2.000	0.064	0.912	36.8	14.3	E
153516	C 3	11.0	7.3	50.8	1.83	27.9	10.85	0.433	0.289	2.000	0.072	1.098	62.0	15.3	F
M225512	C 3	11.0	8.8	60.0	1.12	20.2	1.01	0.433	0.345	2.362	0.044	0.794	5.8	18.0	E
M225712	C 3	11.0	8.6	60.0	1.22	21.5	1.50	0.433	0.337	2.362	0.048	0.845	8.6	17.6	E
M225912	C 3	11.0	8.2	60.0	1.42	28.4	2.56	0.433	0.321	2.362	0.056	1.120	14.6	20.0	E
M226012	C 3	11.0	8.0	60.0	1.50	30.8	3.16	0.433	0.315	2.362	0.059	1.211	18.1	20.5	E
153020	C 3	11.2	9.4	63.5	0.91	13.2	0.51	0.441	0.369	2.500	0.036	0.518	2.9	14.4	D
153120	C 3	11.3	9.3	63.5	1.02	14.9	0.76	0.445	0.365	2.500	0.040	0.588	4.4	14.7	D
153220	C 3	11.1	8.7	63.5	1.22	18.9	1.68	0.437	0.341	2.500	0.048	0.744	9.6	15.5	E
153320	C 3	11.3	8.5	63.5	1.42	23.3	2.92	0.445	0.333	2.500	0.056	0.918	16.7	16.4	E
153420	C 3	11.2	7.9	63.5	1.63	28.0	5.18	0.441	0.313	2.500	0.064	1.104	29.6	17.3	F
153520	C 3	11.0	7.3	63.5	1.83	34.3	8.59	0.433	0.289	2.500	0.072	1.350	49.0	18.8	F
M225514	C 3	11.0	8.8	70.0	1.12	23.5	0.85	0.433	0.345	2.756	0.044	0.926	4.9	21.0	E
M225714	C 3	11.0	8.6	70.0	1.22	24.9	1.27	0.433	0.337	2.756	0.048	0.979	7.3	20.4	E
M225914	C 3	11.0	8.2	70.0	1.42	33.1	2.17	0.433	0.321	2.756	0.056	1.302	12.4	23.3	F
M226014	C 3	11.0	8.0	70.0	1.50	35.6	2.69	0.433	0.315	2.756	0.059	1.403	15.4	23.8	F
153024	C 3	11.2	9.4	76.2	0.91	15.4	0.43	0.441	0.369	3.000	0.036	0.608	2.4	16.9	D
153124	C 3	11.3	9.3	76.2	1.02	17.8	0.63	0.445	0.365	3.000	0.040	0.700	3.6	17.5	E
153224	C 3	11.1	8.7	76.2	1.22	21.8	1.43	0.437	0.341	3.000	0.048	0.859	8.1	17.9	E
153324	C 3	11.3	8.5	76.2	1.42	27.7	2.40	0.445	0.333	3.000	0.056	1.092	13.7	19.5	F
153424	C 3	11.2	7.9	76.2	1.63	33.3	4.27	0.441	0.313	3.000	0.064	1.312	24.4	20.5	F
153524	C 3	11.0	7.3	76.2	1.83	40.7	7.10	0.433	0.289	3.000	0.072	1.602	40.6	22.3	F
M225516	C 3	11.0	8.8	80.0	1.12	26.6	0.74	0.433	0.345	3.150	0.044	1.047	4.2	23.8	E

For Sales or Assistance - Tel 0117 967 3313

All characteristics are nominal



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No. of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	lbs/in		
M225716	C 3	11.0	8.6	80.0	1.22	28.2	1.11	0.433	0.337	3.150	0.048	1.109	6.3	23.1	E
M225916	C 3	11.0	8.2	80.0	1.42	37.7	1.88	0.433	0.321	3.150	0.056	1.484	10.8	26.5	F
M226016	C 3	11.0	8.0	80.0	1.50	40.5	2.34	0.433	0.315	3.150	0.059	1.594	13.4	27.0	F
153028	C 3	11.2	9.4	88.9	0.91	17.8	0.36	0.441	0.369	3.500	0.036	0.702	2.1	19.5	E
153128	C 3	11.3	9.3	88.9	1.02	20.4	0.54	0.445	0.365	3.500	0.040	0.804	3.1	20.1	E
153228	C 3	11.1	8.7	88.9	1.22	25.4	1.21	0.437	0.341	3.500	0.048	0.998	6.9	20.8	E
153328	C 3	11.3	8.5	88.9	1.42	32.1	2.04	0.445	0.333	3.500	0.056	1.265	11.7	22.6	F
153428	C 3	11.2	7.9	88.9	1.63	38.6	3.63	0.441	0.313	3.500	0.064	1.520	20.7	23.8	F
153528	C 3	11.0	7.3	88.9	1.83	47.1	6.06	0.433	0.289	3.500	0.072	1.854	34.6	25.8	G
M225520	C 3	11.0	8.8	100.0	1.12	32.8	0.59	0.433	0.345	3.937	0.044	1.290	3.4	29.3	F
M225720	C 3	11.0	8.6	100.0	1.22	34.7	0.88	0.433	0.337	3.937	0.048	1.368	5.0	28.5	F
M225920	C 3	11.0	8.2	100.0	1.42	46.6	1.50	0.433	0.321	3.937	0.056	1.833	8.6	32.8	F
M226020	C 3	11.0	8.0	100.0	1.50	50.3	1.86	0.433	0.315	3.937	0.059	1.978	10.6	33.5	F
153032	C 3	11.2	9.4	101.6	0.91	20.1	0.32	0.441	0.369	4.000	0.036	0.792	1.8	22.0	F
153132	C 3	11.3	9.3	101.6	1.02	22.9	0.47	0.445	0.365	4.000	0.040	0.900	2.7	22.5	F
153232	C 3	11.1	8.7	101.6	1.22	28.8	1.05	0.437	0.341	4.000	0.048	1.133	6.0	23.6	F
153332	C 3	11.3	8.5	101.6	1.42	35.8	1.81	0.445	0.333	4.000	0.056	1.411	10.3	25.2	F
153432	C 3	11.2	7.9	101.6	1.63	43.5	3.19	0.441	0.313	4.000	0.064	1.712	18.2	26.8	G
153532	C 3	11.0	7.3	101.6	1.83	53.5	5.28	0.433	0.289	4.000	0.072	2.106	30.1	29.3	G
163105	C 4	12.1	10.1	15.9	1.02	4.8	2.82	0.476	0.396	0.625	0.040	0.190	16.1	4.8	C
163205	C 4	11.9	9.5	15.9	1.22	5.9	6.42	0.469	0.373	0.625	0.048	0.230	36.6	4.8	C
163305	C 4	12.1	9.3	15.9	1.42	7.3	10.74	0.476	0.364	0.625	0.056	0.286	61.3	5.1	D
163405	C 4	12.0	8.7	15.9	1.63	8.5	19.10	0.472	0.344	0.625	0.064	0.336	109.0	5.3	D
163505	C 4	11.7	8.0	15.9	1.83	10.2	32.04	0.461	0.317	0.625	0.072	0.403	182.9	5.6	E
163605	C 4	11.6	7.5	15.9	2.03	11.7	51.45	0.457	0.297	0.625	0.080	0.460	293.8	5.8	E
C4-3443-2M	C 4	12.1	10.1	17.5	1.02	5.1	2.58	0.476	0.396	0.689	0.040	0.200	14.7	5.0	C
C4-3447-2M	C 4	11.9	9.5	17.5	1.22	6.8	5.02	0.469	0.373	0.689	0.048	0.268	28.7	5.6	C
C4-3451-2M	C 4	12.1	9.3	17.5	1.42	8.2	8.76	0.476	0.364	0.689	0.056	0.325	50.0	5.8	D
C4-3454-2M	C 4	11.9	8.6	17.5	1.63	9.9	15.60	0.469	0.340	0.689	0.064	0.390	89.1	6.1	D
163106	C 4	12.1	10.1	19.1	1.02	5.4	2.35	0.476	0.396	0.750	0.040	0.212	13.4	5.3	C
163206	C 4	11.9	9.5	19.1	1.22	6.8	4.99	0.469	0.373	0.750	0.048	0.269	28.5	5.6	C
163306	C 4	12.1	9.3	19.1	1.42	8.2	8.76	0.476	0.364	0.750	0.056	0.325	50.0	5.8	D
163406	C 4	12.0	8.7	19.1	1.63	9.8	15.52	0.472	0.344	0.750	0.064	0.384	88.6	6.0	D
163506	C 4	11.7	8.0	19.1	1.83	11.7	26.21	0.461	0.317	0.750	0.072	0.461	149.7	6.4	E
163606	C 4	11.6	7.5	19.1	2.03	13.2	42.87	0.457	0.297	0.750	0.080	0.520	244.8	6.5	E
C4-3745-2M	C 4	12.0	9.8	20.0	1.12	6.6	3.14	0.472	0.384	0.787	0.044	0.258	17.9	5.9	C
C4-3747-2M	C 4	12.0	9.6	20.0	1.22	7.5	4.25	0.472	0.376	0.787	0.048	0.293	24.2	6.1	D
C4-3751-2M	C 4	12.0	9.2	20.0	1.42	9.3	7.60	0.472	0.360	0.787	0.056	0.364	43.4	6.5	D
C4-3843-2M	C 4	12.1	10.1	22.2	1.02	6.0	1.97	0.476	0.396	0.875	0.040	0.237	11.3	5.9	C
C4-3847-2M	C 4	11.9	9.5	22.2	1.22	8.2	3.82	0.469	0.373	0.875	0.048	0.322	21.8	6.7	D
C4-3851-2M	C 4	12.1	9.3	22.2	1.42	10.0	6.62	0.476	0.364	0.875	0.056	0.393	37.8	7.0	D
C4-3854-2M	C 4	12.0	8.7	22.2	1.63	12.0	11.51	0.472	0.344	0.875	0.064	0.473	65.7	7.4	E
C4-3857-2M	C 4	11.7	8.0	22.2	1.83	14.1	20.25	0.461	0.317	0.875	0.072	0.554	115.7	7.7	E
C4-4045-2M	C 4	12.0	9.8	25.0	1.12	7.8	2.45	0.472	0.384	0.984	0.044	0.306	14.0	6.9	D
M245705	C 4	12.0	9.6	25.0	1.22	8.9	3.30	0.472	0.376	0.984	0.048	0.350	18.8	7.3	D
M245905	C 4	12.0	9.2	25.0	1.42	11.4	5.71	0.472	0.360	0.984	0.056	0.448	32.6	8.0	D
M246105	C 4	12.0	8.7	25.0	1.63	13.4	9.93	0.472	0.344	0.984	0.064	0.528	56.7	8.3	E
M246205	C 4	12.0	8.6	25.0	1.70	14.5	11.66	0.472	0.339	0.984	0.067	0.569	66.6	8.5	E
163108	C 4	12.1	10.1	25.4	1.02	6.6	1.72	0.476	0.396	1.000	0.040	0.260	9.8	6.5	C
163208	C 4	11.9	9.5	25.4	1.22	8.3	3.74	0.469	0.373	1.000	0.048	0.326	21.4	6.8	D
163308	C 4	12.1	9.3	25.4	1.42	10.1	6.53	0.476	0.364	1.000	0.056	0.397	37.3	7.1	D

Choose from millions of sizes - www.flexosprings.com

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No. of Coils approx	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	Lbs/in		
163408	C 4	12.0	8.7	25.4	1.63	11.8	11.82	0.472	0.344	1.000	0.064	0.464	67.5	7.3	E
163508	C 4	11.7	8.0	25.4	1.83	14.4	19.55	0.461	0.317	1.000	0.072	0.569	111.6	7.9	E
163608	C 4	11.6	7.5	25.4	2.03	16.8	30.87	0.457	0.297	1.000	0.080	0.660	176.3	8.3	E
C4-4243-2M	C 4	12.1	10.1	27.5	1.02	7.1	1.57	0.476	0.396	1.083	0.040	0.278	8.9	7.0	C
C4-4247-2M	C 4	11.9	9.5	27.5	1.22	9.7	3.02	0.469	0.373	1.083	0.048	0.382	17.2	8.0	D
C4-4251-2M	C 4	12.1	9.3	27.5	1.42	11.9	5.21	0.476	0.364	1.083	0.056	0.470	29.7	8.4	D
C4-4254-2M	C 4	12.0	8.7	27.5	1.63	14.5	9.01	0.472	0.344	1.083	0.064	0.569	51.4	8.9	E
C4-4257-2M	C 4	11.7	8.0	27.5	1.83	17.0	15.78	0.461	0.317	1.083	0.072	0.670	90.1	9.3	E
C4-4345-2M	C 4	12.0	9.8	30.0	1.12	9.0	2.01	0.472	0.384	1.181	0.044	0.354	11.5	8.0	D
M245706	C 4	12.0	9.6	30.0	1.22	10.4	2.69	0.472	0.376	1.181	0.048	0.408	15.3	8.5	D
M245906	C 4	12.0	9.2	30.0	1.42	13.5	4.57	0.472	0.360	1.181	0.056	0.532	26.1	9.5	E
M246106	C 4	12.0	8.7	30.0	1.63	15.9	8.01	0.472	0.344	1.181	0.064	0.624	45.7	9.8	E
M246206	C 4	12.0	8.6	30.0	1.70	17.0	9.47	0.472	0.339	1.181	0.067	0.669	54.1	10.0	E
163110	C 4	12.1	10.1	31.8	1.02	7.9	1.34	0.476	0.396	1.250	0.040	0.312	7.6	7.8	D
163210	C 4	11.9	9.5	31.8	1.22	9.9	2.94	0.469	0.373	1.250	0.048	0.389	16.8	8.1	D
163310	C 4	12.1	9.3	31.8	1.42	11.9	5.20	0.476	0.364	1.250	0.056	0.470	29.7	8.4	D
163410	C 4	12.0	8.7	31.8	1.63	14.2	9.19	0.472	0.344	1.250	0.064	0.560	52.5	8.8	E
163510	C 4	11.7	8.0	31.8	1.83	17.2	15.59	0.461	0.317	1.250	0.072	0.677	89.0	9.4	E
163610	C 4	11.6	7.5	31.8	2.03	20.3	24.12	0.457	0.297	1.250	0.080	0.800	137.7	10.0	E
C4-4545-2M	C 4	12.0	9.8	35.0	1.12	10.2	1.70	0.472	0.384	1.378	0.044	0.402	9.7	9.1	D
C4-4547-2M	C 4	12.0	9.6	35.0	1.22	11.7	2.29	0.472	0.376	1.378	0.048	0.462	13.1	9.6	D
C4-4551-2M	C 4	12.0	9.2	35.0	1.42	14.9	4.05	0.472	0.360	1.378	0.056	0.585	23.1	10.4	E
C4-4554-2M	C 4	12.0	8.7	35.0	1.63	17.9	6.88	0.472	0.344	1.378	0.064	0.705	39.3	11.0	E
C4-4555-2M	C 4	12.0	8.6	35.0	1.70	19.0	8.26	0.472	0.339	1.378	0.067	0.748	47.2	11.2	E
163112	C 4	12.1	10.1	38.1	1.02	9.1	1.11	0.476	0.396	1.500	0.040	0.360	6.3	9.0	D
163212	C 4	11.9	9.5	38.1	1.22	11.5	2.43	0.469	0.373	1.500	0.048	0.451	13.9	9.4	D
163312	C 4	12.1	9.3	38.1	1.42	14.1	4.21	0.476	0.364	1.500	0.056	0.554	24.1	9.9	E
163412	C 4	12.0	8.7	38.1	1.63	16.7	7.52	0.472	0.344	1.500	0.064	0.656	43.0	10.3	E
163512	C 4	11.7	8.0	38.1	1.83	19.9	12.96	0.461	0.317	1.500	0.072	0.785	74.0	10.9	E
163612	C 4	11.6	7.5	38.1	2.03	23.9	19.79	0.457	0.297	1.500	0.080	0.940	113.0	11.8	F
C4-4745-2M	C 4	12.0	9.8	40.0	1.12	11.4	1.48	0.472	0.384	1.575	0.044	0.450	8.4	10.2	D
M245708	C 4	12.0	9.6	40.0	1.22	13.2	1.98	0.472	0.376	1.575	0.048	0.518	11.3	10.8	D
M245908	C 4	12.0	9.2	40.0	1.42	17.4	3.34	0.472	0.360	1.575	0.056	0.686	19.1	12.3	E
M246108	C 4	12.0	8.7	40.0	1.63	20.7	5.77	0.472	0.344	1.575	0.064	0.816	33.0	12.8	E
M246208	C 4	12.0	8.6	40.0	1.70	22.1	6.89	0.472	0.339	1.575	0.067	0.870	39.3	13.0	E
163114	C 4	12.1	10.1	44.5	1.02	10.5	0.93	0.476	0.396	1.750	0.040	0.412	5.3	10.3	D
163214	C 4	11.9	9.5	44.5	1.22	13.0	2.06	0.469	0.373	1.750	0.048	0.514	11.8	10.7	D
163314	C 4	12.1	9.3	44.5	1.42	16.1	3.58	0.476	0.364	1.750	0.056	0.633	20.4	11.3	E
163414	C 4	12.0	8.7	44.5	1.63	19.1	6.37	0.472	0.344	1.750	0.064	0.752	36.3	11.8	E
163514	C 4	11.7	8.0	44.5	1.83	23.2	10.78	0.461	0.317	1.750	0.072	0.915	61.5	12.7	E
163614	C 4	11.6	7.5	44.5	2.03	26.9	17.15	0.457	0.297	1.750	0.080	1.060	97.9	13.3	F
C4-5045-2M	C 4	12.0	9.8	50.0	1.12	13.9	1.17	0.472	0.384	1.969	0.044	0.546	6.7	12.4	D
M245710	C 4	12.0	9.6	50.0	1.22	16.1	1.56	0.472	0.376	1.969	0.048	0.633	8.9	13.2	E
M245910	C 4	12.0	9.2	50.0	1.42	21.7	2.58	0.472	0.360	1.969	0.056	0.854	14.8	15.3	E
M246110	C 4	12.0	8.7	50.0	1.63	25.6	4.51	0.472	0.344	1.969	0.064	1.008	25.8	15.8	E
M246210	C 4	12.0	8.6	50.0	1.70	27.2	5.41	0.472	0.339	1.969	0.067	1.071	30.9	16.0	F
163116	C 4	12.1	10.1	50.8	1.02	11.5	0.83	0.476	0.396	2.000	0.040	0.452	4.8	11.3	D
163216	C 4	11.9	9.5	50.8	1.22	14.5	1.81	0.469	0.373	2.000	0.048	0.571	10.4	11.9	D
163316	C 4	12.1	9.3	50.8	1.42	17.8	3.17	0.476	0.364	2.000	0.056	0.700	18.1	12.5	E
163416	C 4	12.0	8.7	50.8	1.63	21.1	5.64	0.472	0.344	2.000	0.064	0.832	32.2	13.0	E
163516	C 4	11.7	8.0	50.8	1.83	26.0	9.45	0.461	0.317	2.000	0.072	1.023	54.0	14.2	F

For Sales or Assistance - Tel 0117 967 3313

All characteristics are nominal

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	lbs/in	approx	
163616	C 4	11.6	7.5	50.8	2.03	30.5	14.84	0.457	0.297	2.000	0.080	1.200	84.7	15.0	F
M245712	C 4	12.0	9.6	60.0	1.22	18.9	1.29	0.472	0.376	2.362	0.048	0.744	7.4	15.5	E
M245912	C 4	12.0	9.2	60.0	1.42	25.6	2.14	0.472	0.360	2.362	0.056	1.008	12.2	18.0	E
M246112	C 4	12.0	8.7	60.0	1.63	30.5	3.71	0.472	0.344	2.362	0.064	1.200	21.2	18.8	F
M246212	C 4	12.0	8.6	60.0	1.70	32.3	4.46	0.472	0.339	2.362	0.067	1.272	25.4	19.0	F
163120	C 4	12.1	10.1	63.5	1.02	13.7	0.67	0.476	0.396	2.500	0.040	0.540	3.9	13.5	D
163220	C 4	11.9	9.5	63.5	1.22	17.7	1.44	0.469	0.373	2.500	0.048	0.696	8.2	14.5	E
163320	C 4	12.1	9.3	63.5	1.42	21.3	2.56	0.476	0.364	2.500	0.056	0.840	14.6	15.0	E
163420	C 4	12.0	8.7	63.5	1.63	26.0	4.43	0.472	0.344	2.500	0.064	1.024	25.3	16.0	F
163520	C 4	11.7	8.0	63.5	1.83	31.6	7.54	0.461	0.317	2.500	0.072	1.246	43.0	17.3	F
163620	C 4	11.6	7.5	63.5	2.03	37.6	11.69	0.457	0.297	2.500	0.080	1.480	66.8	18.5	F
M245714	C 4	12.0	9.6	70.0	1.22	21.8	1.10	0.472	0.376	2.756	0.048	0.859	6.3	17.9	E
M245914	C 4	12.0	9.2	70.0	1.42	29.5	1.83	0.472	0.360	2.756	0.056	1.162	10.4	20.8	F
M246114	C 4	12.0	8.7	70.0	1.63	35.4	3.14	0.472	0.344	2.756	0.064	1.392	17.9	21.8	F
M246214	C 4	12.0	8.6	70.0	1.70	37.8	3.74	0.472	0.339	2.756	0.067	1.489	21.4	22.3	F
163124	C 4	12.1	10.1	76.2	1.02	16.3	0.55	0.476	0.396	3.000	0.040	0.640	3.2	16.0	E
163224	C 4	11.9	9.5	76.2	1.22	20.7	1.20	0.469	0.373	3.000	0.048	0.816	6.8	17.0	E
163324	C 4	12.1	9.3	76.2	1.42	25.5	2.09	0.476	0.364	3.000	0.056	1.002	12.0	17.9	F
163424	C 4	12.0	8.7	76.2	1.63	30.5	3.71	0.472	0.344	3.000	0.064	1.200	21.2	18.8	F
163524	C 4	11.7	8.0	76.2	1.83	37.3	6.27	0.461	0.317	3.000	0.072	1.469	35.8	20.4	F
163624	C 4	11.6	7.5	76.2	2.03	44.2	9.77	0.457	0.297	3.000	0.080	1.740	55.8	21.8	G
M245716	C 4	12.0	9.6	80.0	1.22	24.6	0.96	0.472	0.376	3.150	0.048	0.969	5.5	20.2	E
M245916	C 4	12.0	9.2	80.0	1.42	33.4	1.59	0.472	0.360	3.150	0.056	1.316	9.1	23.5	F
M246116	C 4	12.0	8.7	80.0	1.63	40.2	2.73	0.472	0.344	3.150	0.064	1.584	15.6	24.8	F
M246216	C 4	12.0	8.6	80.0	1.70	42.9	3.26	0.472	0.339	3.150	0.067	1.690	18.6	25.3	F
163128	C 4	12.1	10.1	88.9	1.02	18.8	0.47	0.476	0.396	3.500	0.040	0.740	2.7	18.5	E
163228	C 4	11.9	9.5	88.9	1.22	23.8	1.03	0.469	0.373	3.500	0.048	0.936	5.9	19.5	E
163328	C 4	12.1	9.3	88.9	1.42	29.3	1.79	0.476	0.364	3.500	0.056	1.153	10.2	20.6	F
163428	C 4	12.0	8.7	88.9	1.63	35.4	3.14	0.472	0.344	3.500	0.064	1.392	17.9	21.8	F
163528	C 4	11.7	8.0	88.9	1.83	43.3	5.31	0.461	0.317	3.500	0.072	1.707	30.3	23.7	G
163628	C 4	11.6	7.5	88.9	2.03	51.3	8.30	0.457	0.297	3.500	0.080	2.020	47.4	25.3	G
M245720	C 4	12.0	9.6	100.0	1.22	30.4	0.76	0.472	0.376	3.937	0.048	1.195	4.4	24.9	F
M245920	C 4	12.0	9.2	100.0	1.42	41.6	1.26	0.472	0.360	3.937	0.056	1.638	7.2	29.3	F
M246120	C 4	12.0	8.7	100.0	1.63	50.0	2.16	0.472	0.344	3.937	0.064	1.968	12.3	30.8	G
M246220	C 4	12.0	8.6	100.0	1.70	53.1	2.59	0.472	0.339	3.937	0.067	2.092	14.8	31.3	G
163132	C 4	12.1	10.1	101.6	1.02	21.1	0.41	0.476	0.396	4.000	0.040	0.832	2.4	20.8	F
163232	C 4	11.9	9.5	101.6	1.22	26.8	0.90	0.469	0.373	4.000	0.048	1.056	5.1	22.0	F
163332	C 4	12.1	9.3	101.6	1.42	32.7	1.59	0.476	0.364	4.000	0.056	1.288	9.1	23.0	F
163432	C 4	12.0	8.7	101.6	1.63	39.8	2.76	0.472	0.344	4.000	0.064	1.568	15.7	24.5	G
163532	C 4	11.7	8.0	101.6	1.83	49.0	4.65	0.461	0.317	4.000	0.072	1.930	26.6	26.8	G
163632	C 4	11.6	7.5	101.6	2.03	57.9	7.28	0.457	0.297	4.000	0.080	2.280	41.6	28.5	H
C5-3443-2M	C 5	12.7	10.7	17.5	1.02	4.8	2.41	0.500	0.420	0.689	0.040	0.190	13.8	4.7	C
C5-3447-2M	C 5	12.7	10.3	17.5	1.22	6.3	4.52	0.500	0.404	0.689	0.048	0.249	25.8	5.2	C
C5-3451-2M	C 5	12.7	9.9	17.5	1.42	7.9	8.02	0.500	0.388	0.689	0.056	0.309	45.8	5.5	D
C5-3454-2M	C 5	12.7	9.4	17.5	1.63	9.3	13.65	0.500	0.372	0.689	0.064	0.367	78.0	5.7	D
C5-3643-2M	C 5	12.7	10.7	19.1	1.02	5.1	2.19	0.500	0.420	0.750	0.040	0.201	12.5	5.0	C
173206	C 5	12.7	10.3	19.1	1.22	6.2	4.67	0.500	0.404	0.750	0.048	0.245	26.6	5.1	C
173306	C 5	12.9	10.1	19.1	1.42	8.0	7.45	0.508	0.396	0.750	0.056	0.314	42.5	5.6	D
173406	C 5	12.7	9.4	19.1	1.63	9.4	13.43	0.500	0.372	0.750	0.064	0.371	76.7	5.8	D
173506	C 5	12.6	8.9	19.1	1.83	10.5	23.67	0.496	0.352	0.750	0.072	0.414	135.2	5.8	E
173606	C 5	12.4	8.3	19.1	2.03	12.7	35.68	0.488	0.328	0.750	0.080	0.500	203.7	6.3	E

Choose from millions of sizes - www.flexosprings.com

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	Lbs/in	approx	
C5-3745-2M	C 5	13.0	10.8	20.0	1.12	6.0	2.78	0.512	0.424	0.787	0.044	0.235	15.9	5.3	C
C5-3747-2M	C 5	13.0	10.6	20.0	1.22	6.8	3.74	0.512	0.416	0.787	0.048	0.268	21.4	5.6	D
C5-3749-2M	C 5	13.0	10.4	20.0	1.32	7.6	4.98	0.512	0.408	0.787	0.052	0.301	28.4	5.8	D
C5-3843-2M	C 5	12.7	10.7	22.2	1.02	5.7	1.84	0.500	0.420	0.875	0.040	0.224	10.5	5.6	C
C5-3847-2M	C 5	12.7	10.3	22.2	1.22	7.6	3.44	0.500	0.404	0.875	0.048	0.298	19.7	6.2	D
C5-3851-2M	C 5	12.9	10.1	22.2	1.42	9.3	5.90	0.508	0.396	0.875	0.056	0.366	33.7	6.5	D
C5-3854-2M	C 5	12.7	9.4	22.2	1.63	11.3	10.25	0.500	0.372	0.875	0.064	0.447	58.5	7.0	E
C5-3857-2M	C 5	12.6	8.9	22.2	1.83	13.2	17.07	0.496	0.352	0.875	0.072	0.518	97.5	7.2	E
C5-3860-2M	C 5	12.4	8.3	22.2	2.03	14.9	28.46	0.488	0.328	0.875	0.080	0.586	162.5	7.3	E
C5-4045-2M	C 5	13.0	10.8	25.0	1.12	7.0	2.17	0.512	0.424	0.984	0.044	0.277	12.4	6.3	D
C5-4047-2M	C 5	13.0	10.6	25.0	1.22	8.0	2.91	0.512	0.416	0.984	0.048	0.317	16.6	6.6	D
C5-4049-2M	C 5	13.0	10.4	25.0	1.32	9.1	3.87	0.512	0.408	0.984	0.052	0.358	22.1	6.9	D
C5-4143-2M	C 5	12.7	10.7	25.4	1.02	6.3	1.59	0.500	0.420	1.000	0.040	0.246	9.1	6.2	C
173208	C 5	12.7	10.3	25.4	1.22	7.7	3.36	0.500	0.404	1.000	0.048	0.302	19.2	6.3	D
173308	C 5	12.9	10.1	25.4	1.42	9.8	5.47	0.508	0.396	1.000	0.056	0.386	31.2	6.9	D
173408	C 5	12.7	9.4	25.4	1.63	11.5	10.00	0.500	0.372	1.000	0.064	0.455	57.1	7.1	E
173508	C 5	12.6	8.9	25.4	1.83	13.3	16.91	0.496	0.352	1.000	0.072	0.522	96.5	7.3	E
173608	C 5	12.4	8.3	25.4	2.03	15.7	26.37	0.488	0.328	1.000	0.080	0.620	150.6	7.8	E
C5-4243-2M	C 5	12.7	10.7	27.5	1.02	6.6	1.46	0.500	0.420	1.083	0.040	0.261	8.4	6.5	C
C5-4247-2M	C 5	12.7	10.3	27.5	1.22	8.9	2.72	0.500	0.404	1.083	0.048	0.351	15.5	7.3	D
C5-4251-2M	C 5	12.9	10.1	27.5	1.42	11.1	4.64	0.508	0.396	1.083	0.056	0.435	26.5	7.8	D
C5-4254-2M	C 5	12.7	9.4	27.5	1.63	13.6	8.02	0.500	0.372	1.083	0.064	0.535	45.8	8.4	E
C5-4257-2M	C 5	12.6	8.9	27.5	1.83	15.9	13.30	0.496	0.352	1.083	0.072	0.625	75.9	8.7	E
C5-4260-2M	C 5	12.4	8.3	27.5	2.03	18.0	22.06	0.488	0.328	1.083	0.080	0.710	126.0	8.9	E
C5-4345-2M	C 5	13.0	10.8	30.0	1.12	8.1	1.78	0.512	0.424	1.181	0.044	0.318	10.2	7.2	D
C5-4347-2M	C 5	13.0	10.6	30.0	1.22	9.3	2.38	0.512	0.416	1.181	0.048	0.365	13.6	7.6	D
M265806	C 5	13.0	10.4	30.0	1.32	11.2	2.91	0.512	0.408	1.181	0.052	0.442	16.6	8.5	D
M265906	C 5	13.0	10.2	30.0	1.42	12.4	3.87	0.512	0.400	1.181	0.056	0.490	22.1	8.8	E
M266106	C 5	13.0	9.7	30.0	1.63	14.6	6.73	0.512	0.384	1.181	0.064	0.576	38.4	9.0	E
M266306	C 5	13.0	9.3	30.0	1.83	16.9	10.98	0.512	0.368	1.181	0.072	0.666	62.7	9.3	E
C5-4443-2M	C 5	12.7	10.7	31.8	1.02	7.4	1.25	0.500	0.420	1.250	0.040	0.291	7.2	7.3	D
173210	C 5	12.7	10.3	31.8	1.22	9.3	2.58	0.500	0.404	1.250	0.048	0.365	14.7	7.6	D
173310	C 5	12.9	10.1	31.8	1.42	11.2	4.54	0.508	0.396	1.250	0.056	0.442	25.9	7.9	D
173410	C 5	12.7	9.4	31.8	1.63	13.7	7.97	0.500	0.372	1.250	0.064	0.538	45.5	8.4	E
173510	C 5	12.6	8.9	31.8	1.83	16.0	13.15	0.496	0.352	1.250	0.072	0.630	75.1	8.8	E
173610	C 5	12.4	8.3	31.8	2.03	18.8	20.91	0.488	0.328	1.250	0.080	0.740	119.4	9.3	E
C5-4547-2M	C 5	13.0	10.6	35.0	1.22	10.5	2.02	0.512	0.416	1.378	0.048	0.414	11.5	8.6	D
C5-4549-2M	C 5	13.0	10.4	35.0	1.32	12.0	2.67	0.512	0.408	1.378	0.052	0.471	15.2	9.1	D
C5-4551-2M	C 5	13.0	10.2	35.0	1.42	13.4	3.51	0.512	0.400	1.378	0.056	0.528	20.0	9.4	E
C5-4554-2M	C 5	13.0	9.7	35.0	1.63	16.3	5.85	0.512	0.384	1.378	0.064	0.643	33.4	10.0	E
C5-4557-2M	C 5	13.0	9.3	35.0	1.83	19.1	9.44	0.512	0.368	1.378	0.072	0.751	53.9	10.4	E
C5-4643-2M	C 5	12.7	10.7	38.1	1.02	8.5	1.03	0.500	0.420	1.500	0.040	0.336	5.9	8.4	D
173212	C 5	12.7	10.3	38.1	1.22	10.8	2.10	0.500	0.404	1.500	0.048	0.427	12.0	8.9	D
173312	C 5	12.9	10.1	38.1	1.42	13.1	3.72	0.508	0.396	1.500	0.056	0.515	21.3	9.2	E
173412	C 5	12.7	9.4	38.1	1.63	16.1	6.46	0.500	0.372	1.500	0.064	0.634	36.9	9.9	E
173512	C 5	12.6	8.9	38.1	1.83	18.3	11.10	0.496	0.352	1.500	0.072	0.720	63.4	10.0	E
173612	C 5	12.4	8.3	38.1	2.03	21.8	17.33	0.488	0.328	1.500	0.080	0.860	99.0	10.8	F
C5-4747-2M	C 5	13.0	10.6	40.0	1.22	11.8	1.75	0.512	0.416	1.575	0.048	0.463	10.0	9.7	D
M265808	C 5	13.0	10.4	40.0	1.32	14.2	2.16	0.512	0.408	1.575	0.052	0.559	12.3	10.8	E
M265908	C 5	13.0	10.2	40.0	1.42	16.0	2.82	0.512	0.400	1.575	0.056	0.630	16.1	11.3	E
M266108	C 5	13.0	9.7	40.0	1.63	19.1	4.83	0.512	0.384	1.575	0.064	0.752	27.6	11.8	E

For Sales or Assistance - Tel 0117 967 3313

All characteristics are nominal


Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	lbs/in		
M266308	C 5	13.0	9.3	40.0	1.83	21.9	7.96	0.512	0.368	1.575	0.072	0.864	45.4	12.0	E
173214	C 5	12.7	10.3	44.5	1.22	12.4	1.76	0.500	0.404	1.750	0.048	0.490	10.1	10.2	D
173314	C 5	12.9	10.1	44.5	1.42	14.8	3.19	0.508	0.396	1.750	0.056	0.582	18.2	10.4	E
173414	C 5	12.7	9.4	44.5	1.63	18.4	5.49	0.500	0.372	1.750	0.064	0.723	31.3	11.3	E
173514	C 5	12.6	8.9	44.5	1.83	20.6	9.60	0.496	0.352	1.750	0.072	0.810	54.8	11.3	E
173614	C 5	12.4	8.3	44.5	2.03	24.9	14.79	0.488	0.328	1.750	0.080	0.980	84.5	12.3	F
M265810	C 5	13.0	10.4	50.0	1.32	17.5	1.68	0.512	0.408	1.969	0.052	0.689	9.6	13.3	E
M265910	C 5	13.0	10.2	50.0	1.42	19.6	2.22	0.512	0.400	1.969	0.056	0.770	12.7	13.8	E
M266110	C 5	13.0	9.7	50.0	1.63	23.6	3.77	0.512	0.384	1.969	0.064	0.928	21.5	14.5	E
M266310	C 5	13.0	9.3	50.0	1.83	27.4	6.12	0.512	0.368	1.969	0.072	1.080	35.0	15.0	F
173216	C 5	12.7	10.3	50.8	1.22	13.9	1.54	0.500	0.404	2.000	0.048	0.547	8.8	11.4	D
173316	C 5	12.9	10.1	50.8	1.42	16.8	2.73	0.508	0.396	2.000	0.056	0.661	15.6	11.8	E
173416	C 5	12.7	9.4	50.8	1.63	20.8	4.72	0.500	0.372	2.000	0.064	0.819	27.0	12.8	E
173516	C 5	12.6	8.9	50.8	1.83	23.3	8.26	0.496	0.352	2.000	0.072	0.918	47.2	12.8	F
173616	C 5	12.4	8.3	50.8	2.03	27.9	12.90	0.488	0.328	2.000	0.080	1.100	73.7	13.8	F
M265812	C 5	13.0	10.4	60.0	1.32	20.5	1.40	0.512	0.408	2.362	0.052	0.806	8.0	15.5	E
M265912	C 5	13.0	10.2	60.0	1.42	22.8	1.87	0.512	0.400	2.362	0.056	0.896	10.7	16.0	E
M266112	C 5	13.0	9.7	60.0	1.63	27.6	3.14	0.512	0.384	2.362	0.064	1.088	17.9	17.0	F
M266312	C 5	13.0	9.3	60.0	1.83	32.5	5.05	0.512	0.368	2.362	0.072	1.278	28.8	17.8	F
173220	C 5	12.7	10.3	63.5	1.22	16.8	1.23	0.500	0.404	2.500	0.048	0.662	7.0	13.8	E
173320	C 5	12.9	10.1	63.5	1.42	20.3	2.18	0.508	0.396	2.500	0.056	0.801	12.4	14.3	E
173420	C 5	12.7	9.4	63.5	1.63	25.0	3.81	0.500	0.372	2.500	0.064	0.986	21.7	15.4	F
173520	C 5	12.6	8.9	63.5	1.83	28.8	6.46	0.496	0.352	2.500	0.072	1.134	36.9	15.8	F
173620	C 5	12.4	8.3	63.5	2.03	34.0	10.28	0.488	0.328	2.500	0.080	1.340	58.7	16.8	F
M265814	C 5	13.0	10.4	70.0	1.32	23.8	1.18	0.512	0.408	2.756	0.052	0.935	6.7	18.0	E
M265914	C 5	13.0	10.2	70.0	1.42	26.3	1.58	0.512	0.400	2.756	0.056	1.036	9.0	18.5	F
M266114	C 5	13.0	9.7	70.0	1.63	32.1	2.65	0.512	0.384	2.756	0.064	1.264	15.1	19.8	F
M266314	C 5	13.0	9.3	70.0	1.83	37.5	4.30	0.512	0.368	2.756	0.072	1.476	24.6	20.5	F
173224	C 5	12.7	10.3	76.2	1.22	19.4	1.04	0.500	0.404	3.000	0.048	0.763	5.9	15.9	E
173324	C 5	12.9	10.1	76.2	1.42	23.6	1.84	0.508	0.396	3.000	0.056	0.929	10.5	16.6	F
173424	C 5	12.7	9.4	76.2	1.63	29.3	3.19	0.500	0.372	3.000	0.064	1.152	18.2	18.0	F
173524	C 5	12.6	8.9	76.2	1.83	32.9	5.55	0.496	0.352	3.000	0.072	1.296	31.7	18.0	F
173624	C 5	12.4	8.3	76.2	2.03	40.1	8.54	0.488	0.328	3.000	0.080	1.580	48.8	19.8	G
M265816	C 5	13.0	10.4	80.0	1.32	26.7	1.03	0.512	0.408	3.150	0.052	1.052	5.9	20.3	F
M265916	C 5	13.0	10.2	80.0	1.42	29.9	1.37	0.512	0.400	3.150	0.056	1.176	7.8	21.0	F
M266116	C 5	13.0	9.7	80.0	1.63	36.6	2.30	0.512	0.384	3.150	0.064	1.440	13.1	22.5	F
M266316	C 5	13.0	9.3	80.0	1.83	43.0	3.70	0.512	0.368	3.150	0.072	1.692	21.1	23.5	G
173228	C 5	12.7	10.3	88.9	1.22	22.3	0.89	0.500	0.404	3.500	0.048	0.878	5.1	18.3	E
173328	C 5	12.9	10.1	88.9	1.42	27.0	1.58	0.508	0.396	3.500	0.056	1.064	9.0	19.0	F
173428	C 5	12.7	9.4	88.9	1.63	34.0	2.70	0.500	0.372	3.500	0.064	1.338	15.4	20.9	F
173528	C 5	12.6	8.9	88.9	1.83	39.3	4.55	0.496	0.352	3.500	0.072	1.548	26.0	21.5	G
173628	C 5	12.4	8.3	88.9	2.03	46.2	7.31	0.488	0.328	3.500	0.080	1.820	41.7	22.8	G
M265820	C 5	13.0	10.4	100.0	1.32	33.0	0.82	0.512	0.408	3.937	0.052	1.299	4.7	25.0	F
M265920	C 5	13.0	10.2	100.0	1.42	37.0	1.09	0.512	0.400	3.937	0.056	1.456	6.2	26.0	F
M266120	C 5	13.0	9.7	100.0	1.63	45.5	1.81	0.512	0.384	3.937	0.064	1.792	10.3	28.0	G
M266320	C 5	13.0	9.3	100.0	1.83	53.5	2.92	0.512	0.368	3.937	0.072	2.106	16.7	29.3	G
173232	C 5	12.7	10.3	101.6	1.22	25.4	0.77	0.500	0.404	4.000	0.048	0.998	4.4	20.8	F
173332	C 5	12.9	10.1	101.6	1.42	30.7	1.37	0.508	0.396	4.000	0.056	1.209	7.8	21.6	F
173432	C 5	12.7	9.4	101.6	1.63	38.0	2.38	0.500	0.372	4.000	0.064	1.498	13.6	23.4	G
173532	C 5	12.6	8.9	101.6	1.83	44.4	3.99	0.496	0.352	4.000	0.072	1.746	22.8	24.3	G
173632	C 5	12.4	8.3	101.6	2.03	52.3	6.38	0.488	0.328	4.000	0.080	2.060	36.5	25.8	H

Choose from millions of sizes - www.flexosprings.com

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	lbs/in	approx	
M265824	C 5	13.0	10.4	120.0	1.32	39.3	0.68	0.512	0.408	4.724	0.052	1.546	3.9	29.8	G
M265924	C 5	13.0	10.2	120.0	1.42	44.1	0.90	0.512	0.400	4.724	0.056	1.736	5.1	31.0	G
M266124	C 5	13.0	9.7	120.0	1.63	54.1	1.51	0.512	0.384	4.724	0.064	2.129	8.6	33.3	H
M266324	C 5	13.0	9.3	120.0	1.83	63.6	2.43	0.512	0.368	4.724	0.072	2.502	13.9	34.8	H
173240	C 5	12.7	10.3	127.0	1.22	31.0	0.62	0.500	0.404	5.000	0.048	1.219	3.5	25.4	G
173340	C 5	12.9	10.1	127.0	1.42	37.7	1.09	0.508	0.396	5.000	0.056	1.484	6.2	26.5	G
173440	C 5	12.7	9.4	127.0	1.63	47.0	1.90	0.500	0.372	5.000	0.064	1.850	10.8	28.9	H
173540	C 5	12.6	8.9	127.0	1.83	54.4	3.20	0.496	0.352	5.000	0.072	2.142	18.3	29.8	H
173640	C 5	12.4	8.3	127.0	2.03	65.0	5.05	0.488	0.328	5.000	0.080	2.560	28.9	32.0	J
C6-3447-2M	C 6	13.5	11.1	17.5	1.22	5.9	4.12	0.531	0.436	0.689	0.048	0.234	23.5	4.9	C
C6-3451-2M	C 6	13.7	10.9	17.5	1.42	7.3	7.04	0.539	0.427	0.689	0.056	0.286	40.2	5.1	D
C6-3454-2M	C 6	13.5	10.2	17.5	1.63	8.8	12.13	0.531	0.403	0.689	0.064	0.347	69.2	5.4	D
C6-3457-2M	C 6	13.3	9.6	17.5	1.83	10.3	20.36	0.524	0.380	0.689	0.072	0.404	116.3	5.6	E
183206	C 6	13.5	11.1	19.1	1.22	6.2	3.81	0.531	0.436	0.750	0.048	0.245	21.8	5.1	C
183306	C 6	13.7	10.9	19.1	1.42	7.5	6.64	0.539	0.427	0.750	0.056	0.297	37.9	5.3	D
183406	C 6	13.5	10.2	19.1	1.63	8.6	12.54	0.531	0.403	0.750	0.064	0.339	71.6	5.3	D
183506	C 6	13.3	9.6	19.1	1.83	10.2	20.41	0.524	0.380	0.750	0.072	0.403	116.6	5.6	E
183606	C 6	13.1	9.0	19.1	2.03	11.8	32.80	0.516	0.356	0.750	0.080	0.464	187.3	5.8	E
183706	C 6	13.4	8.7	19.1	2.34	13.6	57.47	0.528	0.344	0.750	0.092	0.534	328.1	5.8	E
C6-3847-2M	C 6	13.5	11.1	22.2	1.22	7.0	3.13	0.531	0.436	0.875	0.048	0.277	17.9	5.8	D
C6-3851-2M	C 6	13.7	10.9	22.2	1.42	8.7	5.33	0.539	0.427	0.875	0.056	0.342	30.4	6.1	D
C6-3854-2M	C 6	13.5	10.2	22.2	1.63	10.6	9.10	0.531	0.403	0.875	0.064	0.419	52.0	6.5	E
C6-3857-2M	C 6	13.3	9.6	22.2	1.83	12.5	15.18	0.524	0.380	0.875	0.072	0.493	86.6	6.8	E
C6-3860-2M	C 6	13.1	9.0	22.2	2.03	14.2	24.91	0.516	0.356	0.875	0.080	0.560	142.2	7.0	E
C6-3863-2M	C 6	13.4	8.7	22.2	2.34	16.0	45.19	0.528	0.344	0.875	0.092	0.629	258.1	6.8	F
183208	C 6	13.5	11.1	25.4	1.22	7.7	2.75	0.531	0.436	1.000	0.048	0.302	15.7	6.3	D
183308	C 6	13.7	10.9	25.4	1.42	9.1	4.98	0.539	0.427	1.000	0.056	0.358	28.4	6.4	D
183408	C 6	13.5	10.2	25.4	1.63	11.2	8.45	0.531	0.403	1.000	0.064	0.442	48.2	6.9	E
183508	C 6	13.3	9.6	25.4	1.83	13.0	14.41	0.524	0.380	1.000	0.072	0.511	82.3	7.1	E
183608	C 6	13.1	9.0	25.4	2.03	14.8	23.52	0.516	0.356	1.000	0.080	0.584	134.3	7.3	E
183708	C 6	13.4	8.7	25.4	2.34	17.1	41.20	0.528	0.344	1.000	0.092	0.672	235.3	7.3	F
C6-4247-2M	C 6	13.5	11.1	27.5	1.22	8.3	2.48	0.531	0.436	1.083	0.048	0.325	14.1	6.8	D
C6-4251-2M	C 6	13.7	10.9	27.5	1.42	10.3	4.19	0.539	0.427	1.083	0.056	0.405	23.9	7.2	D
C6-4254-2M	C 6	13.5	10.2	27.5	1.63	12.7	7.13	0.531	0.403	1.083	0.064	0.500	40.7	7.8	E
C6-4257-2M	C 6	13.3	9.6	27.5	1.83	15.0	11.82	0.524	0.380	1.083	0.072	0.592	67.5	8.2	E
C6-4260-2M	C 6	13.1	9.0	27.5	2.03	17.2	19.31	0.516	0.356	1.083	0.080	0.677	110.2	8.5	E
C6-4263-2M	C 6	13.4	8.7	27.5	2.34	19.4	34.76	0.528	0.344	1.083	0.092	0.762	198.5	8.3	F
183210	C 6	13.5	11.1	31.8	1.22	9.0	2.19	0.531	0.436	1.250	0.048	0.355	12.5	7.4	D
183310	C 6	13.7	10.9	31.8	1.42	10.9	3.84	0.539	0.427	1.250	0.056	0.431	21.9	7.7	D
183410	C 6	13.5	10.2	31.8	1.63	12.8	7.01	0.531	0.403	1.250	0.064	0.506	40.1	7.9	E
183510	C 6	13.3	9.6	31.8	1.83	15.4	11.48	0.524	0.380	1.250	0.072	0.605	65.6	8.4	E
183610	C 6	13.1	9.0	31.8	2.03	18.1	18.06	0.516	0.356	1.250	0.080	0.712	103.1	8.9	E
183710	C 6	13.4	8.7	31.8	2.34	20.8	31.65	0.528	0.344	1.250	0.092	0.819	180.7	8.9	F
183212	C 6	13.5	11.1	38.1	1.22	10.2	1.85	0.531	0.436	1.500	0.048	0.403	10.5	8.4	D
183312	C 6	13.7	10.9	38.1	1.42	12.4	3.27	0.539	0.427	1.500	0.056	0.487	18.7	8.7	E
183412	C 6	13.5	10.2	38.1	1.63	15.0	5.75	0.531	0.403	1.500	0.064	0.589	32.8	9.2	E
183512	C 6	13.3	9.6	38.1	1.83	17.7	9.54	0.524	0.380	1.500	0.072	0.698	54.5	9.7	E
183612	C 6	13.1	9.0	38.1	2.03	20.7	15.20	0.516	0.356	1.500	0.080	0.816	86.8	10.2	F
183712	C 6	13.4	8.7	38.1	2.34	24.3	26.00	0.528	0.344	1.500	0.092	0.957	148.4	10.4	F
183214	C 6	13.5	11.1	44.5	1.22	11.6	1.58	0.531	0.436	1.750	0.048	0.456	9.0	9.5	D
183314	C 6	13.7	10.9	44.5	1.42	14.1	2.77	0.539	0.427	1.750	0.056	0.554	15.8	9.9	E

For Sales or Assistance - Tel 0117 967 3313

All characteristics are nominal

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	lbs/in	approx	
183414	C 6	13.5	10.2	44.5	1.63	17.1	4.87	0.531	0.403	1.750	0.064	0.672	27.8	10.5	E
183514	C 6	13.3	9.6	44.5	1.83	19.9	8.26	0.524	0.380	1.750	0.072	0.785	47.1	10.9	E
183614	C 6	13.1	9.0	44.5	2.03	23.8	12.85	0.516	0.356	1.750	0.080	0.936	73.4	11.7	F
183714	C 6	13.4	8.7	44.5	2.34	27.8	22.06	0.528	0.344	1.750	0.092	1.095	126.0	11.9	F
183216	C 6	13.5	11.1	50.8	1.22	12.8	1.39	0.531	0.436	2.000	0.048	0.504	7.9	10.5	D
183316	C 6	13.7	10.9	50.8	1.42	15.6	2.43	0.539	0.427	2.000	0.056	0.616	13.9	11.0	E
183416	C 6	13.5	10.2	50.8	1.63	19.0	4.27	0.531	0.403	2.000	0.064	0.749	24.4	11.7	E
183516	C 6	13.3	9.6	50.8	1.83	22.3	7.21	0.524	0.380	2.000	0.072	0.878	41.1	12.2	F
183616	C 6	13.1	9.0	50.8	2.03	26.2	11.44	0.516	0.356	2.000	0.080	1.032	65.3	12.9	F
183716	C 6	13.4	8.7	50.8	2.34	31.3	19.16	0.528	0.344	2.000	0.092	1.233	109.4	13.4	G
183220	C 6	13.5	11.1	63.5	1.22	15.6	1.09	0.531	0.436	2.500	0.048	0.614	6.2	12.8	E
183320	C 6	13.7	10.9	63.5	1.42	18.9	1.94	0.539	0.427	2.500	0.056	0.745	11.1	13.3	E
183420	C 6	13.5	10.2	63.5	1.63	23.3	3.36	0.531	0.403	2.500	0.064	0.915	19.2	14.3	F
183520	C 6	13.3	9.6	63.5	1.83	27.1	5.74	0.524	0.380	2.500	0.072	1.066	32.8	14.8	F
183620	C 6	13.1	9.0	63.5	2.03	32.5	8.90	0.516	0.356	2.500	0.080	1.280	50.8	16.0	F
183720	C 6	13.4	8.7	63.5	2.34	38.6	15.06	0.528	0.344	2.500	0.092	1.518	86.0	16.5	G
183224	C 6	13.5	11.1	76.2	1.22	18.0	0.92	0.531	0.436	3.000	0.048	0.710	5.3	14.8	E
183324	C 6	13.7	10.9	76.2	1.42	22.0	1.62	0.539	0.427	3.000	0.056	0.868	9.3	15.5	F
183424	C 6	13.5	10.2	76.2	1.63	27.3	2.80	0.531	0.403	3.000	0.064	1.075	16.0	16.8	F
183524	C 6	13.3	9.6	76.2	1.83	32.2	4.71	0.524	0.380	3.000	0.072	1.267	26.9	17.6	F
183624	C 6	13.1	9.0	76.2	2.03	38.4	7.38	0.516	0.356	3.000	0.080	1.512	42.1	18.9	G
183724	C 6	13.4	8.7	76.2	2.34	45.6	12.48	0.528	0.344	3.000	0.092	1.794	71.3	19.5	H
183228	C 6	13.5	11.1	88.9	1.22	20.7	0.79	0.531	0.436	3.500	0.048	0.816	4.5	17.0	E
183328	C 6	13.7	10.9	88.9	1.42	25.3	1.39	0.539	0.427	3.500	0.056	0.997	7.9	17.8	F
183428	C 6	13.5	10.2	88.9	1.63	31.5	2.38	0.531	0.403	3.500	0.064	1.242	13.6	19.4	F
183528	C 6	13.3	9.6	88.9	1.83	36.8	4.06	0.524	0.380	3.500	0.072	1.447	23.2	20.1	G
183628	C 6	13.1	9.0	88.9	2.03	44.5	6.26	0.516	0.356	3.500	0.080	1.752	35.8	21.9	G
183728	C 6	13.4	8.7	88.9	2.34	52.3	10.70	0.528	0.344	3.500	0.092	2.061	61.1	22.4	H
183232	C 6	13.5	11.1	101.6	1.22	23.6	0.68	0.531	0.436	4.000	0.048	0.931	3.9	19.4	F
183332	C 6	13.7	10.9	101.6	1.42	28.4	1.22	0.539	0.427	4.000	0.056	1.120	6.9	20.0	F
183432	C 6	13.5	10.2	101.6	1.63	35.4	2.09	0.531	0.403	4.000	0.064	1.396	11.9	21.8	G
183532	C 6	13.3	9.6	101.6	1.83	41.9	3.52	0.524	0.380	4.000	0.072	1.649	20.1	22.9	G
183632	C 6	13.1	9.0	101.6	2.03	50.0	5.52	0.516	0.356	4.000	0.080	1.968	31.5	24.6	H
183732	C 6	13.4	8.7	101.6	2.34	59.4	9.33	0.528	0.344	4.000	0.092	2.337	53.3	25.4	J
183240	C 6	13.5	11.1	127.0	1.22	28.9	0.54	0.531	0.436	5.000	0.048	1.137	3.1	23.7	G
183340	C 6	13.7	10.9	127.0	1.42	34.8	0.97	0.539	0.427	5.000	0.056	1.372	5.6	24.5	G
183440	C 6	13.5	10.2	127.0	1.63	43.3	1.68	0.531	0.403	5.000	0.064	1.703	9.6	26.6	H
183540	C 6	13.3	9.6	127.0	1.83	51.6	2.81	0.524	0.380	5.000	0.072	2.031	16.0	28.2	H
183640	C 6	13.1	9.0	127.0	2.03	61.2	4.44	0.516	0.356	5.000	0.080	2.408	25.3	30.1	J
183740	C 6	13.4	8.7	127.0	2.34	73.6	7.40	0.528	0.344	5.000	0.092	2.898	42.3	31.5	K
193206	C 7	14.3	11.9	19.1	1.22	6.1	3.26	0.563	0.467	0.750	0.048	0.240	18.6	5.0	C
193306	C 7	14.5	11.7	19.1	1.42	7.1	6.04	0.571	0.459	0.750	0.056	0.280	34.5	5.0	D
193406	C 7	14.3	11.0	19.1	1.63	8.6	10.31	0.563	0.435	0.750	0.064	0.339	58.9	5.3	E
193506	C 7	14.1	10.4	19.1	1.83	9.7	18.19	0.555	0.411	0.750	0.072	0.382	103.9	5.3	E
193606	C 7	14.0	9.9	19.1	2.03	11.2	28.17	0.551	0.391	0.750	0.080	0.440	160.8	5.5	E
193706	C 7	14.3	9.6	19.1	2.34	12.9	49.34	0.563	0.379	0.750	0.092	0.506	281.8	5.5	F
C7-3747-2M	C 7	14.0	11.6	20.0	1.22	6.3	3.35	0.551	0.455	0.787	0.048	0.246	19.1	5.1	D
C7-3751-2M	C 7	14.0	11.2	20.0	1.42	7.8	5.81	0.551	0.439	0.787	0.056	0.308	33.1	5.5	D
C7-3754-2M	C 7	14.0	10.7	20.0	1.63	9.4	9.64	0.551	0.423	0.787	0.064	0.371	55.0	5.8	E
C7-3847-2M	C 7	14.3	11.9	22.2	1.22	6.6	2.88	0.563	0.467	0.875	0.048	0.259	16.4	5.4	D
C7-3851-2M	C 7	14.5	11.7	22.2	1.42	8.2	4.85	0.571	0.459	0.875	0.056	0.321	27.7	5.7	D

Choose from millions of sizes - www.flexosprings.com

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No. of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	lbs/in	approx	
C7-3854-2M	C 7	14.3	11.0	22.2	1.63	10.0	8.18	0.563	0.435	0.875	0.064	0.394	46.7	6.2	E
C7-3857-2M	C 7	14.1	10.4	22.2	1.83	11.8	13.44	0.555	0.411	0.875	0.072	0.466	76.7	6.5	E
C7-3860-2M	C 7	14.0	9.9	22.2	2.03	13.4	21.37	0.551	0.391	0.875	0.080	0.529	122.0	6.6	E
C7-3863-2M	C 7	14.3	9.6	22.2	2.34	15.2	38.25	0.563	0.379	0.875	0.092	0.599	218.4	6.5	F
C7-4047-2M	C 7	14.0	11.6	25.0	1.22	7.3	2.61	0.551	0.455	0.984	0.048	0.289	14.9	6.0	D
C7-4051-2M	C 7	14.0	11.2	25.0	1.42	9.3	4.50	0.551	0.439	0.984	0.056	0.366	25.7	6.5	D
C7-4054-2M	C 7	14.0	10.7	25.0	1.63	11.3	7.42	0.551	0.423	0.984	0.064	0.443	42.4	6.9	E
C7-4057-2M	C 7	14.0	10.3	25.0	1.83	13.1	11.87	0.551	0.407	0.984	0.072	0.517	67.8	7.2	E
193208	C 7	14.3	11.9	25.4	1.22	7.3	2.44	0.563	0.467	1.000	0.048	0.288	14.0	6.0	D
193308	C 7	14.5	11.7	25.4	1.42	8.5	4.53	0.571	0.459	1.000	0.056	0.336	25.9	6.0	D
193408	C 7	14.3	11.0	25.4	1.63	10.4	7.74	0.563	0.435	1.000	0.064	0.410	44.2	6.4	E
193508	C 7	14.1	10.4	25.4	1.83	12.1	13.05	0.555	0.411	1.000	0.072	0.475	74.5	6.6	E
193608	C 7	14.0	9.9	25.4	2.03	13.7	20.75	0.551	0.391	1.000	0.080	0.540	118.5	6.8	E
193708	C 7	14.3	9.6	25.4	2.34	15.8	36.36	0.563	0.379	1.000	0.092	0.621	207.6	6.8	F
C7-4247-2M	C 7	14.3	11.9	27.5	1.22	7.7	2.27	0.563	0.467	1.083	0.048	0.302	13.0	6.3	D
C7-4251-2M	C 7	14.5	11.7	27.5	1.42	9.6	3.82	0.571	0.459	1.083	0.056	0.378	21.8	6.7	D
C7-4254-2M	C 7	14.3	11.0	27.5	1.63	11.9	6.41	0.563	0.435	1.083	0.064	0.468	36.6	7.3	E
C7-4257-2M	C 7	14.1	10.4	27.5	1.83	14.1	10.47	0.555	0.411	1.083	0.072	0.557	59.8	7.7	E
C7-4260-2M	C 7	14.0	9.9	27.5	2.03	16.2	16.56	0.551	0.391	1.083	0.080	0.636	94.6	8.0	E
C7-4263-2M	C 7	14.3	9.6	27.5	2.34	18.4	29.42	0.563	0.379	1.083	0.092	0.724	168.0	7.9	F
M285906	C 7	14.0	11.2	30.0	1.42	11.4	3.39	0.551	0.439	1.181	0.056	0.448	19.4	8.0	E
M286106	C 7	14.0	10.7	30.0	1.63	13.4	5.85	0.551	0.423	1.181	0.064	0.528	33.4	8.3	E
M286306	C 7	14.0	10.3	30.0	1.83	15.5	9.47	0.551	0.407	1.181	0.072	0.612	54.0	8.5	E
M286506	C 7	14.0	9.9	30.0	2.03	17.8	14.61	0.551	0.391	1.181	0.080	0.700	83.4	8.8	E
193210	C 7	14.3	11.9	31.8	1.22	8.5	1.96	0.563	0.467	1.250	0.048	0.336	11.2	7.0	D
193310	C 7	14.5	11.7	31.8	1.42	10.3	3.45	0.571	0.459	1.250	0.056	0.406	19.7	7.3	D
193410	C 7	14.3	11.0	31.8	1.63	12.4	6.08	0.563	0.435	1.250	0.064	0.487	34.7	7.6	E
193510	C 7	14.1	10.4	31.8	1.83	14.4	10.18	0.555	0.411	1.250	0.072	0.569	58.1	7.9	E
193610	C 7	14.0	9.9	31.8	2.03	16.3	16.43	0.551	0.391	1.250	0.080	0.640	93.8	8.0	E
193710	C 7	14.3	9.6	31.8	2.34	19.3	27.63	0.563	0.379	1.250	0.092	0.759	157.8	8.3	F
C7-4549-2M	C 7	14.0	11.4	35.0	1.32	10.9	2.37	0.551	0.447	1.378	0.052	0.427	13.6	8.2	D
C7-4551-2M	C 7	14.0	11.2	35.0	1.42	12.2	3.10	0.551	0.439	1.378	0.056	0.480	17.7	8.6	E
C7-4554-2M	C 7	14.0	10.7	35.0	1.63	14.9	5.09	0.551	0.423	1.378	0.064	0.588	29.0	9.2	E
C7-4557-2M	C 7	14.0	10.3	35.0	1.83	17.6	8.08	0.551	0.407	1.378	0.072	0.692	46.1	9.6	E
C7-4560-2M	C 7	14.0	9.9	35.0	2.03	20.0	12.55	0.551	0.391	1.378	0.080	0.789	71.6	9.9	F
193212	C 7	14.3	11.9	38.1	1.22	9.8	1.63	0.563	0.467	1.500	0.048	0.384	9.3	8.0	D
193312	C 7	14.5	11.7	38.1	1.42	11.7	2.90	0.571	0.459	1.500	0.056	0.462	16.6	8.3	E
193412	C 7	14.3	11.0	38.1	1.63	14.3	5.01	0.563	0.435	1.500	0.064	0.563	28.6	8.8	E
193512	C 7	14.1	10.4	38.1	1.83	16.8	8.34	0.555	0.411	1.500	0.072	0.662	47.6	9.2	E
193612	C 7	14.0	9.9	38.1	2.03	18.8	13.60	0.551	0.391	1.500	0.080	0.740	77.6	9.3	F
193712	C 7	14.3	9.6	38.1	2.34	22.2	23.03	0.563	0.379	1.500	0.092	0.874	131.5	9.5	F
C7-4749-2M	C 7	14.0	11.4	40.0	1.32	12.1	2.06	0.551	0.447	1.575	0.052	0.477	11.7	9.2	E
M285908	C 7	14.0	11.2	40.0	1.42	14.2	2.55	0.551	0.439	1.575	0.056	0.560	14.5	10.0	E
M286108	C 7	14.0	10.7	40.0	1.63	17.5	4.18	0.551	0.423	1.575	0.064	0.688	23.9	10.8	E
M286308	C 7	14.0	10.3	40.0	1.83	20.6	6.65	0.551	0.407	1.575	0.072	0.810	38.0	11.3	E
M286508	C 7	14.0	9.9	40.0	2.03	23.4	10.38	0.551	0.391	1.575	0.080	0.920	59.3	11.5	F
193214	C 7	14.3	11.9	44.5	1.22	11.0	1.40	0.563	0.467	1.750	0.048	0.432	8.0	9.0	D
193314	C 7	14.5	11.7	44.5	1.42	13.2	2.50	0.571	0.459	1.750	0.056	0.518	14.3	9.3	E
193414	C 7	14.3	11.0	44.5	1.63	16.3	4.25	0.563	0.435	1.750	0.064	0.640	24.3	10.0	E
193514	C 7	14.1	10.4	44.5	1.83	19.2	7.06	0.555	0.411	1.750	0.072	0.756	40.3	10.5	E
193614	C 7	14.0	9.9	44.5	2.03	21.8	11.27	0.551	0.391	1.750	0.080	0.860	64.3	10.8	F

For Sales or Assistance - Tel 0117 967 3313

All characteristics are nominal


Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	Lbs/in		
193714	C 7	14.3	9.6	44.5	2.34	25.1	19.74	0.563	0.379	1.750	0.092	0.989	112.7	10.8	F
M285910	C 7	14.0	11.2	50.0	1.42	17.4	1.99	0.551	0.439	1.969	0.056	0.686	11.3	12.3	E
M286110	C 7	14.0	10.7	50.0	1.63	21.1	3.32	0.551	0.423	1.969	0.064	0.832	19.0	13.0	E
M286310	C 7	14.0	10.3	50.0	1.83	25.1	5.24	0.551	0.407	1.969	0.072	0.990	29.9	13.8	F
M286510	C 7	14.0	9.9	50.0	2.03	28.4	8.22	0.551	0.391	1.969	0.080	1.120	46.9	14.0	F
193216	C 7	14.3	11.9	50.8	1.22	12.2	1.22	0.563	0.467	2.000	0.048	0.480	7.0	10.0	D
193316	C 7	14.5	11.7	50.8	1.42	14.6	2.20	0.571	0.459	2.000	0.056	0.574	12.5	10.3	E
193416	C 7	14.3	11.0	50.8	1.63	17.9	3.78	0.563	0.435	2.000	0.064	0.704	21.6	11.0	E
193516	C 7	14.1	10.4	50.8	1.83	21.0	6.32	0.555	0.411	2.000	0.072	0.828	36.1	11.5	F
193616	C 7	14.0	9.9	50.8	2.03	24.4	9.86	0.551	0.391	2.000	0.080	0.960	56.3	12.0	F
193716	C 7	14.3	9.6	50.8	2.34	28.6	16.85	0.563	0.379	2.000	0.092	1.127	96.2	12.3	G
M285912	C 7	14.0	11.2	60.0	1.42	20.6	1.63	0.551	0.439	2.362	0.056	0.812	9.3	14.5	E
M286112	C 7	14.0	10.7	60.0	1.63	25.2	2.71	0.551	0.423	2.362	0.064	0.992	15.5	15.5	F
M286312	C 7	14.0	10.3	60.0	1.83	29.7	4.32	0.551	0.407	2.362	0.072	1.170	24.7	16.3	F
M286512	C 7	14.0	9.9	60.0	2.03	34.0	6.68	0.551	0.391	2.362	0.080	1.340	38.2	16.8	F
193220	C 7	14.3	11.9	63.5	1.22	14.9	0.95	0.563	0.467	2.500	0.048	0.588	5.4	12.3	E
193320	C 7	14.5	11.7	63.5	1.42	17.8	1.73	0.571	0.459	2.500	0.056	0.700	9.9	12.5	E
193420	C 7	14.3	11.0	63.5	1.63	22.0	2.96	0.563	0.435	2.500	0.064	0.864	16.9	13.5	F
193520	C 7	14.1	10.4	63.5	1.83	25.6	5.00	0.555	0.411	2.500	0.072	1.008	28.6	14.0	F
193620	C 7	14.0	9.9	63.5	2.03	29.5	7.89	0.551	0.391	2.500	0.080	1.160	45.0	14.5	F
193720	C 7	14.3	9.6	63.5	2.34	34.5	13.55	0.563	0.379	2.500	0.092	1.357	77.3	14.8	G
M285914	C 7	14.0	11.2	70.0	1.42	23.8	1.38	0.551	0.439	2.756	0.056	0.938	7.9	16.8	F
M286114	C 7	14.0	10.7	70.0	1.63	29.3	2.29	0.551	0.423	2.756	0.064	1.152	13.1	18.0	F
M286314	C 7	14.0	10.3	70.0	1.83	34.8	3.62	0.551	0.407	2.756	0.072	1.368	20.7	19.0	F
M286514	C 7	14.0	9.9	70.0	2.03	39.6	5.63	0.551	0.391	2.756	0.080	1.560	32.2	19.5	G
193224	C 7	14.3	11.9	76.2	1.22	17.4	0.80	0.563	0.467	3.000	0.048	0.684	4.6	14.3	E
193324	C 7	14.5	11.7	76.2	1.42	20.6	1.45	0.571	0.459	3.000	0.056	0.812	8.3	14.5	F
193424	C 7	14.3	11.0	76.2	1.63	25.7	2.47	0.563	0.435	3.000	0.064	1.011	14.1	15.8	F
193524	C 7	14.1	10.4	76.2	1.83	30.2	4.14	0.555	0.411	3.000	0.072	1.188	23.6	16.5	F
193624	C 7	14.0	9.9	76.2	2.03	35.1	6.46	0.551	0.391	3.000	0.080	1.380	36.9	17.3	G
193724	C 7	14.3	9.6	76.2	2.34	40.9	11.14	0.563	0.379	3.000	0.092	1.610	63.6	17.5	H
M285916	C 7	14.0	11.2	80.0	1.42	27.0	1.20	0.551	0.439	3.150	0.056	1.064	6.8	19.0	F
M286116	C 7	14.0	10.7	80.0	1.63	32.9	2.00	0.551	0.423	3.150	0.064	1.296	11.4	20.3	F
M286316	C 7	14.0	10.3	80.0	1.83	39.3	3.16	0.551	0.407	3.150	0.072	1.548	18.0	21.5	G
M286516	C 7	14.0	9.9	80.0	2.03	45.2	4.87	0.551	0.391	3.150	0.080	1.780	27.8	22.3	G
193228	C 7	14.3	11.9	88.9	1.22	19.8	0.69	0.563	0.467	3.500	0.048	0.780	3.9	16.3	E
193328	C 7	14.5	11.7	88.9	1.42	23.5	1.25	0.571	0.459	3.500	0.056	0.924	7.1	16.5	F
193428	C 7	14.3	11.0	88.9	1.63	27.6	2.27	0.563	0.435	3.500	0.064	1.088	13.0	17.0	F
193528	C 7	14.1	10.4	88.9	1.83	34.6	3.55	0.555	0.411	3.500	0.072	1.361	20.3	18.9	G
193628	C 7	14.0	9.9	88.9	2.03	40.1	5.55	0.551	0.391	3.500	0.080	1.580	31.7	19.8	G
193728	C 7	14.3	9.6	88.9	2.34	46.7	9.59	0.563	0.379	3.500	0.092	1.840	54.8	20.0	H
M285920	C 7	14.0	11.2	100.0	1.42	33.1	0.96	0.551	0.439	3.937	0.056	1.302	5.5	23.3	F
M286120	C 7	14.0	10.7	100.0	1.63	41.1	1.57	0.551	0.423	3.937	0.064	1.616	9.0	25.3	G
M286320	C 7	14.0	10.3	100.0	1.83	48.5	2.51	0.551	0.407	3.937	0.072	1.908	14.3	26.5	G
M286520	C 7	14.0	9.9	100.0	2.03	55.9	3.87	0.551	0.391	3.937	0.080	2.200	22.1	27.5	H
193232	C 7	14.3	11.9	101.6	1.22	22.2	0.60	0.563	0.467	4.000	0.048	0.876	3.4	18.3	F
193332	C 7	14.5	11.7	101.6	1.42	26.7	1.08	0.571	0.459	4.000	0.056	1.050	6.2	18.8	F
193432	C 7	14.3	11.0	101.6	1.63	33.0	1.86	0.563	0.435	4.000	0.064	1.300	10.6	20.3	G
193532	C 7	14.1	10.4	101.6	1.83	39.1	3.09	0.555	0.411	4.000	0.072	1.541	17.7	21.4	G
193632	C 7	14.0	9.9	101.6	2.03	45.2	4.87	0.551	0.391	4.000	0.080	1.780	27.8	22.3	H
193732	C 7	14.3	9.6	101.6	2.34	53.2	8.32	0.563	0.379	4.000	0.092	2.093	47.5	22.8	J

Choose from millions of sizes - www.flexosprings.com

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No. of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	lbs/in		
M285924	C 7	14.0	11.2	120.0	1.42	39.1	0.80	0.551	0.439	4.724	0.056	1.540	4.6	27.5	G
M286124	C 7	14.0	10.7	120.0	1.63	48.8	1.31	0.551	0.423	4.724	0.064	1.920	7.5	30.0	H
M286324	C 7	14.0	10.3	120.0	1.83	58.1	2.07	0.551	0.407	4.724	0.072	2.286	11.8	31.8	H
M286524	C 7	14.0	9.9	120.0	2.03	66.5	3.21	0.551	0.391	4.724	0.080	2.620	18.3	32.8	J
193240	C 7	14.3	11.9	127.0	1.22	27.4	0.48	0.563	0.467	5.000	0.048	1.080	2.7	22.5	G
193340	C 7	14.5	11.7	127.0	1.42	32.7	0.86	0.571	0.459	5.000	0.056	1.288	4.9	23.0	G
193440	C 7	14.3	11.0	127.0	1.63	40.7	1.48	0.563	0.435	5.000	0.064	1.600	8.4	25.0	H
193540	C 7	14.1	10.4	127.0	1.83	47.7	2.49	0.555	0.411	5.000	0.072	1.879	14.2	26.1	H
193640	C 7	14.0	9.9	127.0	2.03	55.9	3.87	0.551	0.391	5.000	0.080	2.200	22.1	27.5	J
193740	C 7	14.3	9.6	127.0	2.34	65.4	6.64	0.563	0.379	5.000	0.092	2.576	37.9	28.0	K
203306	C 8	15.3	12.5	19.1	1.42	6.8	5.51	0.602	0.490	0.750	0.056	0.266	31.5	4.8	D
203406	C 8	15.1	11.8	19.1	1.63	8.3	9.14	0.594	0.466	0.750	0.064	0.326	52.2	5.1	E
203506	C 8	14.9	11.2	19.1	1.83	9.7	15.05	0.587	0.443	0.750	0.072	0.382	85.9	5.3	E
203606	C 8	14.7	10.6	19.1	2.03	10.8	25.19	0.579	0.419	0.750	0.080	0.424	143.8	5.3	E
203706	C 8	15.1	10.4	19.1	2.34	12.3	43.76	0.594	0.410	0.750	0.092	0.483	249.9	5.3	F
203806	C 8	14.6	9.3	19.1	2.64	14.5	80.70	0.575	0.367	0.750	0.104	0.572	460.8	5.5	F
C8-3752-2M	C 8	15.0	12.0	20.0	1.50	7.9	6.28	0.591	0.472	0.787	0.059	0.310	35.9	5.2	D
C8-3755-2M	C 8	15.0	11.6	20.0	1.70	9.3	10.10	0.591	0.457	0.787	0.067	0.367	57.6	5.5	E
C8-3758-2M	C 8	15.0	11.2	20.0	1.90	10.7	15.80	0.591	0.441	0.787	0.075	0.422	90.2	5.6	E
C8-3851-2M	C 8	15.3	12.5	22.2	1.42	7.7	4.46	0.602	0.490	0.875	0.056	0.302	25.5	5.4	D
C8-3854-2M	C 8	15.1	11.8	22.2	1.63	9.4	7.43	0.594	0.466	0.875	0.064	0.372	42.4	5.8	E
C8-3857-2M	C 8	14.9	11.2	22.2	1.83	11.2	12.05	0.587	0.443	0.875	0.072	0.441	68.8	6.1	E
C8-3860-2M	C 8	14.7	10.6	22.2	2.03	12.9	19.19	0.579	0.419	0.875	0.080	0.506	109.6	6.3	E
C8-3863-2M	C 8	15.1	10.4	22.2	2.34	14.6	33.49	0.594	0.410	0.875	0.092	0.575	191.2	6.2	F
C8-4052-2M	C 8	15.0	12.0	25.0	1.50	9.3	4.86	0.591	0.472	0.984	0.059	0.366	27.7	6.2	D
C8-4055-2M	C 8	15.0	11.6	25.0	1.70	11.1	7.76	0.591	0.457	0.984	0.067	0.437	44.3	6.5	E
C8-4058-2M	C 8	15.0	11.2	25.0	1.90	12.8	12.07	0.591	0.441	0.984	0.075	0.506	68.9	6.8	E
203308	C 8	15.3	12.5	25.4	1.42	8.2	4.04	0.602	0.490	1.000	0.056	0.322	23.1	5.8	D
203408	C 8	15.1	11.8	25.4	1.63	9.9	6.91	0.594	0.466	1.000	0.064	0.390	39.4	6.1	E
203508	C 8	14.9	11.2	25.4	1.83	11.7	11.29	0.587	0.443	1.000	0.072	0.461	64.5	6.4	E
203608	C 8	14.7	10.6	25.4	2.03	12.8	19.33	0.579	0.419	1.000	0.080	0.504	110.4	6.3	E
203708	C 8	15.1	10.4	25.4	2.34	15.2	31.60	0.594	0.410	1.000	0.092	0.598	180.5	6.5	F
203808	C 8	14.6	9.3	25.4	2.64	17.8	59.46	0.575	0.367	1.000	0.104	0.702	339.5	6.8	G
C8-4251-2M	C 8	15.3	12.5	27.5	1.42	9.0	3.51	0.602	0.490	1.083	0.056	0.354	20.0	6.3	D
C8-4254-2M	C 8	15.1	11.8	27.5	1.63	11.2	5.82	0.594	0.466	1.083	0.064	0.440	33.2	6.9	E
C8-4257-2M	C 8	14.9	11.2	27.5	1.83	13.3	9.38	0.587	0.443	1.083	0.072	0.525	53.6	7.3	E
C8-4260-2M	C 8	14.7	10.6	27.5	2.03	15.4	14.88	0.579	0.419	1.083	0.080	0.607	85.0	7.6	E
C8-4263-2M	C 8	15.1	10.4	27.5	2.34	17.6	25.75	0.594	0.410	1.083	0.092	0.692	147.1	7.5	F
M306006	C 8	15.0	12.0	30.0	1.50	11.3	3.71	0.591	0.472	1.181	0.059	0.443	21.2	7.5	E
M306206	C 8	15.0	11.6	30.0	1.70	13.2	6.12	0.591	0.457	1.181	0.067	0.519	34.9	7.8	E
M306406	C 8	15.0	11.2	30.0	1.90	15.2	9.58	0.591	0.441	1.181	0.075	0.598	54.7	8.0	E
M306606	C 8	15.0	10.8	30.0	2.12	17.5	14.99	0.591	0.424	1.181	0.083	0.689	85.6	8.3	F
203310	C 8	15.3	12.5	31.8	1.42	9.6	3.19	0.602	0.490	1.250	0.056	0.378	18.2	6.8	D
203410	C 8	15.1	11.8	31.8	1.63	11.5	5.55	0.594	0.466	1.250	0.064	0.455	31.7	7.1	E
203510	C 8	14.9	11.2	31.8	1.83	13.5	9.20	0.587	0.443	1.250	0.072	0.533	52.5	7.4	E
203610	C 8	14.7	10.6	31.8	2.03	15.4	14.84	0.579	0.419	1.250	0.080	0.608	84.8	7.6	E
203710	C 8	15.1	10.4	31.8	2.34	18.1	24.73	0.594	0.410	1.250	0.092	0.713	141.2	7.8	F
203810	C 8	14.6	9.3	31.8	2.64	21.8	45.19	0.575	0.367	1.250	0.104	0.858	258.0	8.3	G
C8-4551-2M	C 8	15.0	12.2	35.0	1.42	11.1	2.77	0.591	0.479	1.378	0.056	0.439	15.8	7.8	E
C8-4552-2M	C 8	15.0	12.0	35.0	1.50	12.2	3.34	0.591	0.472	1.378	0.059	0.479	19.1	8.1	E
C8-4555-2M	C 8	15.0	11.6	35.0	1.70	14.7	5.30	0.591	0.457	1.378	0.067	0.578	30.3	8.6	E

For Sales or Assistance - Tel 0117 967 3313

All characteristics are nominal


Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	lbs/in	approx	
C8-4558-2M	C 8	15.0	11.2	35.0	1.90	17.1	8.20	0.591	0.441	1.378	0.075	0.674	46.8	9.0	E
C8-4561-2M	C 8	15.0	10.8	35.0	2.12	19.7	12.87	0.591	0.424	1.378	0.083	0.774	73.5	9.3	F
203312	C 8	15.3	12.5	38.1	1.42	11.0	2.64	0.602	0.490	1.500	0.056	0.434	15.1	7.8	E
203412	C 8	15.1	11.8	38.1	1.63	13.2	4.64	0.594	0.466	1.500	0.064	0.519	26.5	8.1	E
203512	C 8	14.9	11.2	38.1	1.83	15.9	7.41	0.587	0.443	1.500	0.072	0.626	42.3	8.7	E
203612	C 8	14.7	10.6	38.1	2.03	18.1	12.05	0.579	0.419	1.500	0.080	0.712	68.8	8.9	F
203712	C 8	15.1	10.4	38.1	2.34	21.0	20.32	0.594	0.410	1.500	0.092	0.828	116.0	9.0	F
203812	C 8	14.6	9.3	38.1	2.64	25.1	37.66	0.575	0.367	1.500	0.104	0.988	215.0	9.5	G
C8-4751-2M	C 8	15.0	12.2	40.0	1.42	12.4	2.40	0.591	0.479	1.575	0.056	0.490	13.7	8.7	E
M306008	C 8	15.0	12.0	40.0	1.50	14.3	2.72	0.591	0.472	1.575	0.059	0.561	15.5	9.5	E
M306208	C 8	15.0	11.6	40.0	1.70	17.4	4.27	0.591	0.457	1.575	0.067	0.686	24.4	10.3	E
M306408	C 8	15.0	11.2	40.0	1.90	20.0	6.76	0.591	0.441	1.575	0.075	0.785	38.6	10.5	F
M306608	C 8	15.0	10.8	40.0	2.12	22.8	10.71	0.591	0.424	1.575	0.083	0.897	61.2	10.8	F
203314	C 8	15.3	12.5	44.5	1.42	12.4	2.25	0.602	0.490	1.750	0.056	0.490	12.8	8.8	E
203414	C 8	15.1	11.8	44.5	1.63	15.1	3.88	0.594	0.466	1.750	0.064	0.595	22.2	9.3	E
203514	C 8	14.9	11.2	44.5	1.83	17.7	6.45	0.587	0.443	1.750	0.072	0.698	36.8	9.7	F
203614	C 8	14.7	10.6	44.5	2.03	20.7	10.14	0.579	0.419	1.750	0.080	0.816	57.9	10.2	F
203714	C 8	15.1	10.4	44.5	2.34	24.0	17.24	0.594	0.410	1.750	0.092	0.943	98.4	10.3	G
203814	C 8	14.6	9.3	44.5	2.64	28.4	32.28	0.575	0.367	1.750	0.104	1.118	184.3	10.8	G
M306010	C 8	15.0	12.0	50.0	1.50	17.3	2.15	0.591	0.472	1.969	0.059	0.679	12.3	11.5	E
M306210	C 8	15.0	11.6	50.0	1.70	21.3	3.35	0.591	0.457	1.969	0.067	0.837	19.1	12.5	F
M306410	C 8	15.0	11.2	50.0	1.90	24.7	5.22	0.591	0.441	1.969	0.075	0.972	29.8	13.0	F
M306610	C 8	15.0	10.8	50.0	2.12	28.1	8.33	0.591	0.424	1.969	0.083	1.106	47.6	13.3	F
203316	C 8	15.3	12.5	50.8	1.42	13.9	1.96	0.602	0.490	2.000	0.056	0.546	11.2	9.8	E
203416	C 8	15.1	11.8	50.8	1.63	16.9	3.37	0.594	0.466	2.000	0.064	0.666	19.3	10.4	E
203516	C 8	14.9	11.2	50.8	1.83	19.9	5.58	0.587	0.443	2.000	0.072	0.785	31.9	10.9	F
203616	C 8	14.7	10.6	50.8	2.03	23.2	8.84	0.579	0.419	2.000	0.080	0.912	50.5	11.4	F
203716	C 8	15.1	10.4	50.8	2.34	26.9	14.97	0.594	0.410	2.000	0.092	1.058	85.5	11.5	G
203816	C 8	14.6	9.3	50.8	2.64	32.4	27.56	0.575	0.367	2.000	0.104	1.274	157.3	12.3	H
M306012	C 8	15.0	12.0	60.0	1.50	20.6	1.74	0.591	0.472	2.362	0.059	0.812	9.9	13.8	E
M306212	C 8	15.0	11.6	60.0	1.70	25.1	2.76	0.591	0.457	2.362	0.067	0.987	15.8	14.8	F
M306412	C 8	15.0	11.2	60.0	1.90	29.0	4.34	0.591	0.441	2.362	0.075	1.141	24.8	15.3	F
M306612	C 8	15.0	10.8	60.0	2.12	33.4	6.82	0.591	0.424	2.362	0.083	1.315	38.9	15.8	G
203320	C 8	15.3	12.5	63.5	1.42	16.7	1.56	0.602	0.490	2.500	0.056	0.658	8.9	11.8	E
203420	C 8	15.1	11.8	63.5	1.63	20.2	2.72	0.594	0.466	2.500	0.064	0.794	15.6	12.4	F
203520	C 8	14.9	11.2	63.5	1.83	24.3	4.40	0.587	0.443	2.500	0.072	0.958	25.1	13.3	F
203620	C 8	14.7	10.6	63.5	2.03	27.8	7.11	0.579	0.419	2.500	0.080	1.096	40.6	13.7	F
203720	C 8	15.1	10.4	63.5	2.34	32.1	12.10	0.594	0.410	2.500	0.092	1.265	69.1	13.8	G
203820	C 8	14.6	9.3	63.5	2.64	39.0	22.15	0.575	0.367	2.500	0.104	1.534	126.5	14.8	H
M306014	C 8	15.0	12.0	70.0	1.50	23.6	1.48	0.591	0.472	2.756	0.059	0.930	8.5	15.8	F
M306214	C 8	15.0	11.6	70.0	1.70	28.9	2.35	0.591	0.457	2.756	0.067	1.138	13.4	17.0	F
M306414	C 8	15.0	11.2	70.0	1.90	33.7	3.65	0.591	0.441	2.756	0.075	1.328	20.8	17.8	G
M306614	C 8	15.0	10.8	70.0	2.12	38.7	5.77	0.591	0.424	2.756	0.083	1.523	32.9	18.3	G
203324	C 8	15.3	12.5	76.2	1.42	19.6	1.29	0.602	0.490	3.000	0.056	0.770	7.4	13.8	F
203424	C 8	15.1	11.8	76.2	1.63	23.9	2.23	0.594	0.466	3.000	0.064	0.941	12.7	14.7	F
203524	C 8	14.9	11.2	76.2	1.83	28.3	3.68	0.587	0.443	3.000	0.072	1.116	21.0	15.5	F
203624	C 8	14.7	10.6	76.2	2.03	32.5	5.94	0.579	0.419	3.000	0.080	1.280	33.9	16.0	G
203724	C 8	15.1	10.4	76.2	2.34	38.0	9.98	0.594	0.410	3.000	0.092	1.495	57.0	16.3	H
203824	C 8	14.6	9.3	76.2	2.64	46.2	18.22	0.575	0.367	3.000	0.104	1.820	104.1	17.5	J
M306016	C 8	15.0	12.0	80.0	1.50	26.6	1.29	0.591	0.472	3.150	0.059	1.048	7.4	17.8	F
M306216	C 8	15.0	11.6	80.0	1.70	32.7	2.04	0.591	0.457	3.150	0.067	1.288	11.6	19.3	F

Choose from millions of sizes - www.flexosprings.com

Compression Springs




FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	Lbs/in		
M306416	C 8	15.0	11.2	80.0	1.90	38.0	3.19	0.591	0.441	3.150	0.075	1.496	18.2	20.0	G
M306616	C 8	15.0	10.8	80.0	2.12	44.0	5.00	0.591	0.424	3.150	0.083	1.732	28.5	20.8	H
203328	C 8	15.3	12.5	88.9	1.42	22.4	1.10	0.602	0.490	3.500	0.056	0.882	6.3	15.8	F
203428	C 8	15.1	11.8	88.9	1.63	27.2	1.93	0.594	0.466	3.500	0.064	1.069	11.0	16.7	F
203528	C 8	14.9	11.2	88.9	1.83	32.6	3.14	0.587	0.443	3.500	0.072	1.282	18.0	17.8	G
203628	C 8	14.7	10.6	88.9	2.03	37.6	5.04	0.579	0.419	3.500	0.080	1.480	28.8	18.5	G
203728	C 8	15.1	10.4	88.9	2.34	43.8	8.49	0.594	0.410	3.500	0.092	1.725	48.5	18.8	H
203828	C 8	14.6	9.3	88.9	2.64	53.5	15.48	0.575	0.367	3.500	0.104	2.106	88.4	20.3	J
M306020	C 8	15.0	12.0	100.0	1.50	33.0	1.02	0.591	0.472	3.937	0.059	1.299	5.8	22.0	F
M306220	C 8	15.0	11.6	100.0	1.70	40.4	1.62	0.591	0.457	3.937	0.067	1.590	9.2	23.8	G
M306420	C 8	15.0	11.2	100.0	1.90	47.5	2.50	0.591	0.441	3.937	0.075	1.870	14.3	25.0	G
M306620	C 8	15.0	10.8	100.0	2.12	54.6	3.95	0.591	0.424	3.937	0.083	2.149	22.5	25.8	H
203332	C 8	15.3	12.5	101.6	1.42	25.2	0.96	0.602	0.490	4.000	0.056	0.994	5.5	17.8	F
203432	C 8	15.1	11.8	101.6	1.63	30.9	1.67	0.594	0.466	4.000	0.064	1.216	9.5	19.0	G
203532	C 8	14.9	11.2	101.6	1.83	36.6	2.76	0.587	0.443	4.000	0.072	1.440	15.8	20.0	G
203632	C 8	14.7	10.6	101.6	2.03	42.7	4.38	0.579	0.419	4.000	0.080	1.680	25.0	21.0	H
203732	C 8	15.1	10.4	101.6	2.34	49.7	7.39	0.594	0.410	4.000	0.092	1.955	42.2	21.3	J
203832	C 8	14.6	9.3	101.6	2.64	60.1	13.61	0.575	0.367	4.000	0.104	2.366	77.7	22.8	K
M306024	C 8	15.0	12.0	120.0	1.50	39.0	0.85	0.591	0.472	4.724	0.059	1.535	4.9	26.0	G
M306224	C 8	15.0	11.6	120.0	1.70	48.0	1.34	0.591	0.457	4.724	0.067	1.891	7.7	28.3	H
M306424	C 8	15.0	11.2	120.0	1.90	56.5	2.07	0.591	0.441	4.724	0.075	2.225	11.8	29.8	H
M306624	C 8	15.0	10.8	120.0	2.12	64.7	3.29	0.591	0.424	4.724	0.083	2.546	18.8	30.5	J
203340	C 8	15.3	12.5	127.0	1.42	30.9	0.77	0.602	0.490	5.000	0.056	1.218	4.4	21.8	G
203440	C 8	15.1	11.8	127.0	1.63	37.4	1.35	0.594	0.466	5.000	0.064	1.472	7.7	23.0	H
203540	C 8	14.9	11.2	127.0	1.83	45.0	2.20	0.587	0.443	5.000	0.072	1.771	12.5	24.6	H
203640	C 8	14.7	10.6	127.0	2.03	52.0	3.52	0.579	0.419	5.000	0.080	2.048	20.1	25.6	J
203740	C 8	15.1	10.4	127.0	2.34	61.3	5.86	0.594	0.410	5.000	0.092	2.415	33.5	26.3	K
203840	C 8	14.6	9.3	127.0	2.64	74.6	10.76	0.575	0.367	5.000	0.104	2.938	61.4	28.3	L
213306	C 9	16.1	13.3	19.1	1.42	6.8	4.66	0.634	0.522	0.750	0.056	0.266	26.6	4.8	D
213506	C 9	15.7	12.0	19.1	1.83	8.7	15.11	0.618	0.474	0.750	0.072	0.342	86.3	4.8	E
213806	C 9	15.4	10.1	19.1	2.64	13.9	71.56	0.606	0.398	0.750	0.104	0.546	408.6	5.3	F
213308	C 9	16.1	13.3	25.4	1.42	8.2	3.42	0.634	0.522	1.000	0.056	0.322	19.5	5.8	D
213508	C 9	15.7	12.0	25.4	1.83	11.0	10.39	0.618	0.474	1.000	0.072	0.432	59.3	6.0	E
213808	C 9	15.4	10.1	25.4	2.64	17.2	51.68	0.606	0.398	1.000	0.104	0.676	295.1	6.5	G
213310	C 9	16.1	13.3	31.8	1.42	9.2	2.85	0.634	0.522	1.250	0.056	0.364	16.3	6.5	D
213510	C 9	15.7	12.0	31.8	1.83	12.8	8.31	0.618	0.474	1.250	0.072	0.504	47.5	7.0	E
213810	C 9	15.4	10.1	31.8	2.64	20.5	40.45	0.606	0.398	1.250	0.104	0.806	231.0	7.8	G
213312	C 9	16.1	13.3	38.1	1.42	10.7	2.33	0.634	0.522	1.500	0.056	0.420	13.3	7.5	E
213512	C 9	15.7	12.0	38.1	1.83	14.6	6.93	0.618	0.474	1.500	0.072	0.576	39.6	8.0	E
213812	C 9	15.4	10.1	38.1	2.64	23.8	33.23	0.606	0.398	1.500	0.104	0.936	189.7	9.0	G
M326108	C 9	16.0	12.7	40.0	1.63	14.6	3.33	0.630	0.502	1.575	0.064	0.576	19.0	9.0	E
M326308	C 9	16.0	12.3	40.0	1.83	17.4	5.20	0.630	0.486	1.575	0.072	0.684	29.7	9.5	E
M326508	C 9	16.0	11.9	40.0	2.03	20.3	7.75	0.630	0.470	1.575	0.080	0.800	44.3	10.0	F
M326708	C 9	16.0	11.5	40.0	2.24	22.4	11.97	0.630	0.454	1.575	0.088	0.882	68.4	10.0	F
213314	C 9	16.1	13.3	44.5	1.42	12.1	1.97	0.634	0.522	1.750	0.056	0.476	11.3	8.5	E
213514	C 9	15.7	12.0	44.5	1.83	16.9	5.73	0.618	0.474	1.750	0.072	0.666	32.7	9.3	F
213814	C 9	15.4	10.1	44.5	2.64	27.1	28.19	0.606	0.398	1.750	0.104	1.066	161.0	10.3	G
M326110	C 9	16.0	12.7	50.0	1.63	17.9	2.59	0.630	0.502	1.969	0.064	0.704	14.8	11.0	E
M326310	C 9	16.0	12.3	50.0	1.83	21.5	4.00	0.630	0.486	1.969	0.072	0.846	22.8	11.8	F
M326510	C 9	16.0	11.9	50.0	2.03	24.9	6.05	0.630	0.470	1.969	0.080	0.980	34.5	12.3	F
M326710	C 9	16.0	11.5	50.0	2.24	28.0	9.12	0.630	0.454	1.969	0.088	1.102	52.1	12.5	G

For Sales or Assistance - Tel 0117 967 3313

All characteristics are nominal

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE RANGE
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	lbs/in		
213316	C 9	16.1	13.3	50.8	1.42	13.5	1.71	0.634	0.522	2.000	0.056	0.532	9.8	9.5	E
213516	C 9	15.7	12.0	50.8	1.83	18.7	5.04	0.618	0.474	2.000	0.072	0.738	28.8	10.3	F
21316	C 9	15.4	10.1	50.8	2.64	30.4	24.48	0.606	0.398	2.000	0.104	1.196	139.8	11.5	H
M326112	C 9	16.0	12.7	60.0	1.63	21.1	2.12	0.630	0.502	2.362	0.064	0.832	12.1	13.0	F
M326312	C 9	16.0	12.3	60.0	1.83	25.1	3.32	0.630	0.486	2.362	0.072	0.990	18.9	13.8	F
M326512	C 9	16.0	11.9	60.0	2.03	29.5	4.96	0.630	0.470	2.362	0.080	1.160	28.3	14.5	F
M326712	C 9	16.0	11.5	60.0	2.24	33.0	7.51	0.630	0.454	2.362	0.088	1.301	42.9	14.8	G
213320	C 9	16.1	13.3	63.5	1.42	16.0	1.39	0.634	0.522	2.500	0.056	0.630	7.9	11.3	E
213520	C 9	15.7	12.0	63.5	1.83	22.4	4.05	0.618	0.474	2.500	0.072	0.882	23.2	12.3	F
213820	C 9	15.4	10.1	63.5	2.64	37.0	19.38	0.606	0.398	2.500	0.104	1.456	110.7	14.0	H
M326114	C 9	16.0	12.7	70.0	1.63	24.0	1.83	0.630	0.502	2.756	0.064	0.944	10.4	14.8	F
M326314	C 9	16.0	12.3	70.0	1.83	29.3	2.78	0.630	0.486	2.756	0.072	1.152	15.9	16.0	F
M326514	C 9	16.0	11.9	70.0	2.03	34.0	4.20	0.630	0.470	2.756	0.080	1.340	24.0	16.8	G
M326714	C 9	16.0	11.5	70.0	2.24	38.1	6.39	0.630	0.454	2.756	0.088	1.499	36.5	17.0	H
213324	C 9	16.1	13.3	76.2	1.42	18.8	1.14	0.634	0.522	3.000	0.056	0.742	6.5	13.3	F
213524	C 9	15.7	12.0	76.2	1.83	26.5	3.33	0.618	0.474	3.000	0.072	1.044	19.0	14.5	F
213824	C 9	15.4	10.1	76.2	2.64	43.6	16.04	0.606	0.398	3.000	0.104	1.716	91.6	16.5	J
M326116	C 9	16.0	12.7	80.0	1.63	27.2	1.58	0.630	0.502	3.150	0.064	1.072	9.0	16.8	F
M326316	C 9	16.0	12.3	80.0	1.83	32.9	2.44	0.630	0.486	3.150	0.072	1.296	13.9	18.0	G
M326516	C 9	16.0	11.9	80.0	2.03	38.6	3.65	0.630	0.470	3.150	0.080	1.520	20.8	19.0	G
M326716	C 9	16.0	11.5	80.0	2.24	43.7	5.47	0.630	0.454	3.150	0.088	1.720	31.3	19.5	H
213328	C 9	16.1	13.3	88.9	1.42	21.7	0.97	0.634	0.522	3.500	0.056	0.854	5.5	15.3	F
213528	C 9	15.7	12.0	88.9	1.83	30.2	2.87	0.618	0.474	3.500	0.072	1.188	16.4	16.5	G
213828	C 9	15.4	10.1	88.9	2.64	50.2	13.68	0.606	0.398	3.500	0.104	1.976	78.1	19.0	J
M326120	C 9	16.0	12.7	100.0	1.63	33.7	1.24	0.630	0.502	3.937	0.064	1.328	7.1	20.8	G
M326320	C 9	16.0	12.3	100.0	1.83	40.7	1.92	0.630	0.486	3.937	0.072	1.602	11.0	22.3	G
M326520	C 9	16.0	11.9	100.0	2.03	47.8	2.88	0.630	0.470	3.937	0.080	1.880	16.5	23.5	H
M326720	C 9	16.0	11.5	100.0	2.24	53.8	4.35	0.630	0.454	3.937	0.088	2.117	24.9	24.0	J
213332	C 9	16.1	13.3	101.6	1.42	24.2	0.85	0.634	0.522	4.000	0.056	0.952	4.9	17.0	F
213532	C 9	15.7	12.0	101.6	1.83	33.8	2.52	0.618	0.474	4.000	0.072	1.332	14.4	18.5	G
213832	C 9	15.4	10.1	101.6	2.64	56.8	11.93	0.606	0.398	4.000	0.104	2.236	68.1	21.5	K
M326124	C 9	16.0	12.7	120.0	1.63	39.8	1.04	0.630	0.502	4.724	0.064	1.568	5.9	24.5	H
M326324	C 9	16.0	12.3	120.0	1.83	48.5	1.59	0.630	0.486	4.724	0.072	1.908	9.1	26.5	H
M326524	C 9	16.0	11.9	120.0	2.03	56.9	2.39	0.630	0.470	4.724	0.080	2.240	13.6	28.0	J
M326724	C 9	16.0	11.5	120.0	2.24	64.4	3.58	0.630	0.454	4.724	0.088	2.535	20.4	28.8	J
213340	C 9	16.1	13.3	127.0	1.42	29.5	0.68	0.634	0.522	5.000	0.056	1.162	3.9	20.8	G
213540	C 9	15.7	12.0	127.0	1.83	41.6	2.00	0.618	0.474	5.000	0.072	1.638	11.4	22.8	H
213840	C 9	15.4	10.1	127.0	2.64	70.0	9.49	0.606	0.398	5.000	0.104	2.756	54.2	26.5	L
M326128	C 9	16.0	12.7	140.0	1.63	46.3	0.88	0.630	0.502	5.512	0.064	1.824	5.0	28.5	H
M326328	C 9	16.0	12.3	140.0	1.83	56.2	1.36	0.630	0.486	5.512	0.072	2.214	7.7	30.8	H
M326528	C 9	16.0	11.9	140.0	2.03	66.0	2.03	0.630	0.470	5.512	0.080	2.600	11.6	32.5	J
M326728	C 9	16.0	11.5	140.0	2.24	75.0	3.04	0.630	0.454	5.512	0.088	2.954	17.4	33.5	K
223408	D 1	16.7	13.4	25.4	1.63	8.9	5.78	0.657	0.529	1.000	0.064	0.352	33.0	5.5	E
223508	D 1	16.5	12.8	25.4	1.83	10.5	9.37	0.650	0.506	1.000	0.072	0.414	53.5	5.8	E
223608	D 1	16.3	12.2	25.4	2.03	11.7	15.52	0.642	0.482	1.000	0.080	0.460	88.6	5.8	E
223708	D 1	16.6	11.9	25.4	2.34	14.0	25.48	0.654	0.470	1.000	0.092	0.552	145.5	6.0	F
223808	D 1	16.2	10.9	25.4	2.64	16.5	45.60	0.638	0.430	1.000	0.104	0.650	260.4	6.3	G
223908	D 1	16.4	10.5	25.4	2.95	18.4	72.14	0.646	0.414	1.000	0.116	0.725	411.9	6.3	G
223410	D 1	16.7	13.4	31.8	1.63	10.6	4.50	0.657	0.529	1.250	0.064	0.416	25.7	6.5	E
223510	D 1	16.5	12.8	31.8	1.83	12.3	7.40	0.650	0.506	1.250	0.072	0.486	42.2	6.8	E
223610	D 1	16.3	12.2	31.8	2.03	14.2	11.64	0.642	0.482	1.250	0.080	0.560	66.4	7.0	E

Choose from millions of sizes - www.flexosprings.com

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	Lbs/in	approx	
223710	D 1	16.6	11.9	31.8	2.34	16.4	20.38	0.654	0.470	1.250	0.092	0.644	116.4	7.0	F
223810	D 1	16.2	10.9	31.8	2.64	19.8	35.23	0.638	0.430	1.250	0.104	0.780	201.2	7.5	G
223910	D 1	16.4	10.5	31.8	2.95	22.1	55.74	0.646	0.414	1.250	0.116	0.870	318.3	7.5	H
223412	D 1	16.7	13.4	38.1	1.63	11.8	3.85	0.657	0.529	1.500	0.064	0.464	22.0	7.3	E
223512	D 1	16.5	12.8	38.1	1.83	14.2	6.11	0.650	0.506	1.500	0.072	0.558	34.9	7.8	E
223612	D 1	16.3	12.2	38.1	2.03	16.3	9.70	0.642	0.482	1.500	0.080	0.640	55.4	8.0	F
223712	D 1	16.6	11.9	38.1	2.34	18.7	16.98	0.654	0.470	1.500	0.092	0.736	97.0	8.0	F
223812	D 1	16.2	10.9	38.1	2.64	23.1	28.71	0.638	0.430	1.500	0.104	0.910	163.9	8.8	G
223912	D 1	16.4	10.5	38.1	2.95	25.8	45.42	0.646	0.414	1.500	0.116	1.015	259.4	8.8	H
223414	D 1	16.7	13.4	44.5	1.63	13.4	3.24	0.657	0.529	1.750	0.064	0.528	18.5	8.3	E
223514	D 1	16.5	12.8	44.5	1.83	16.0	5.20	0.650	0.506	1.750	0.072	0.630	29.7	8.8	F
223614	D 1	16.3	12.2	44.5	2.03	18.3	8.31	0.642	0.482	1.750	0.080	0.720	47.5	9.0	F
223714	D 1	16.6	11.9	44.5	2.34	21.6	14.06	0.654	0.470	1.750	0.092	0.851	80.3	9.3	G
223814	D 1	16.2	10.9	44.5	2.64	26.4	24.22	0.638	0.430	1.750	0.104	1.040	138.3	10.0	G
223914	D 1	16.4	10.5	44.5	2.95	29.5	38.32	0.646	0.414	1.750	0.116	1.160	218.8	10.0	H
223416	D 1	16.7	13.4	50.8	1.63	15.0	2.79	0.657	0.529	2.000	0.064	0.592	15.9	9.3	E
223516	D 1	16.5	12.8	50.8	1.83	17.8	4.53	0.650	0.506	2.000	0.072	0.702	25.9	9.8	F
223616	D 1	16.3	12.2	50.8	2.03	20.3	7.27	0.642	0.482	2.000	0.080	0.800	41.5	10.0	F
223716	D 1	16.6	11.9	50.8	2.34	24.0	12.35	0.654	0.470	2.000	0.092	0.943	70.5	10.3	G
223816	D 1	16.2	10.9	50.8	2.64	29.7	20.95	0.638	0.430	2.000	0.104	1.170	119.6	11.3	H
223916	D 1	16.4	10.5	50.8	2.95	33.1	33.15	0.646	0.414	2.000	0.116	1.305	189.3	11.3	J
223420	D 1	16.7	13.4	63.5	1.63	18.3	2.19	0.657	0.529	2.500	0.064	0.720	12.5	11.3	F
223520	D 1	16.5	12.8	63.5	1.83	21.5	3.60	0.650	0.506	2.500	0.072	0.846	20.6	11.8	F
223620	D 1	16.3	12.2	63.5	2.03	24.4	5.82	0.642	0.482	2.500	0.080	0.960	33.2	12.0	F
223720	D 1	16.6	11.9	63.5	2.34	29.2	9.71	0.654	0.470	2.500	0.092	1.150	55.4	12.5	G
223820	D 1	16.2	10.9	63.5	2.64	36.3	16.49	0.638	0.430	2.500	0.104	1.430	94.2	13.8	H
223920	D 1	16.4	10.5	63.5	2.95	40.5	26.09	0.646	0.414	2.500	0.116	1.595	149.0	13.8	J
223424	D 1	16.7	13.4	76.2	1.63	21.1	1.84	0.657	0.529	3.000	0.064	0.832	10.5	13.0	F
223524	D 1	16.5	12.8	76.2	1.83	25.1	2.99	0.650	0.506	3.000	0.072	0.990	17.1	13.8	F
223624	D 1	16.3	12.2	76.2	2.03	29.0	4.75	0.642	0.482	3.000	0.080	1.140	27.1	14.3	G
223724	D 1	16.6	11.9	76.2	2.34	33.9	8.15	0.654	0.470	3.000	0.092	1.334	46.5	14.5	H
223824	D 1	16.2	10.9	76.2	2.64	42.3	13.84	0.638	0.430	3.000	0.104	1.664	79.0	16.0	J
223924	D 1	16.4	10.5	76.2	2.95	47.1	21.90	0.646	0.414	3.000	0.116	1.856	125.0	16.0	K
223428	D 1	16.7	13.4	88.9	1.63	24.0	1.59	0.657	0.529	3.500	0.064	0.944	9.1	14.8	F
223528	D 1	16.5	12.8	88.9	1.83	28.3	2.60	0.650	0.506	3.500	0.072	1.116	14.9	15.5	G
223628	D 1	16.3	12.2	88.9	2.03	33.0	4.08	0.642	0.482	3.500	0.080	1.300	23.3	16.3	G
223728	D 1	16.6	11.9	88.9	2.34	39.1	6.91	0.654	0.470	3.500	0.092	1.541	39.4	16.8	H
223828	D 1	16.2	10.9	88.9	2.64	48.9	11.74	0.638	0.430	3.500	0.104	1.924	67.1	18.5	J
223928	D 1	16.4	10.5	88.9	2.95	54.5	18.58	0.646	0.414	3.500	0.116	2.146	106.1	18.5	K
223432	D 1	16.7	13.4	101.6	1.63	27.2	1.37	0.657	0.529	4.000	0.064	1.072	7.8	16.8	G
223532	D 1	16.5	12.8	101.6	1.83	32.0	2.27	0.650	0.506	4.000	0.072	1.260	12.9	17.5	G
223632	D 1	16.3	12.2	101.6	2.03	37.6	3.53	0.642	0.482	4.000	0.080	1.480	20.1	18.5	H
223732	D 1	16.6	11.9	101.6	2.34	44.4	5.99	0.654	0.470	4.000	0.092	1.748	34.2	19.0	J
223832	D 1	16.2	10.9	101.6	2.64	54.8	10.34	0.638	0.430	4.000	0.104	2.158	59.0	20.8	K
223932	D 1	16.4	10.5	101.6	2.95	61.1	16.35	0.646	0.414	4.000	0.116	2.407	93.4	20.8	L
223440	D 1	16.7	13.4	127.0	1.63	33.3	1.09	0.657	0.529	5.000	0.064	1.312	6.2	20.5	H
223540	D 1	16.5	12.8	127.0	1.83	39.3	1.80	0.650	0.506	5.000	0.072	1.548	10.3	21.5	H
223640	D 1	16.3	12.2	127.0	2.03	45.7	2.84	0.642	0.482	5.000	0.080	1.800	16.2	22.5	J
223740	D 1	16.6	11.9	127.0	2.34	54.3	4.80	0.654	0.470	5.000	0.092	2.139	27.4	23.3	K
223840	D 1	16.2	10.9	127.0	2.64	67.4	8.25	0.638	0.430	5.000	0.104	2.652	47.1	25.5	L
223940	D 1	16.4	10.5	127.0	2.95	75.1	13.05	0.646	0.414	5.000	0.116	2.958	74.5	25.5	M

For Sales or Assistance - Tel 0117 967 3313

All characteristics are nominal


Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No. of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	lbs/in	approx	
223448	D 1	16.7	13.4	152.4	1.63	39.4	0.91	0.657	0.529	6.000	0.064	1.552	5.2	24.3	H
223548	D 1	16.5	12.8	152.4	1.83	46.6	1.49	0.650	0.506	6.000	0.072	1.836	8.5	25.5	J
223648	D 1	16.3	12.2	152.4	2.03	54.4	2.35	0.642	0.482	6.000	0.080	2.140	13.4	26.8	K
223748	D 1	16.6	11.9	152.4	2.34	64.3	4.00	0.654	0.470	6.000	0.092	2.530	22.8	27.5	L
223848	D 1	16.2	10.9	152.4	2.64	80.6	6.80	0.638	0.430	6.000	0.104	3.172	38.8	30.5	M
223948	D 1	16.4	10.5	152.4	2.95	89.9	10.76	0.646	0.414	6.000	0.116	3.538	61.4	30.5	N
233508	D 2	17.3	13.6	25.4	1.83	10.1	8.56	0.681	0.537	1.000	0.072	0.396	48.9	5.5	E
233510	D 2	17.3	13.6	31.8	1.83	11.4	7.05	0.681	0.537	1.250	0.072	0.450	40.2	6.3	E
233512	D 2	17.3	13.6	38.1	1.83	13.3	5.71	0.681	0.537	1.500	0.072	0.522	32.6	7.3	E
M346208	D 2	17.0	13.6	40.0	1.70	14.9	3.42	0.669	0.535	1.575	0.067	0.586	19.6	8.8	E
M346408	D 2	17.0	13.2	40.0	1.90	17.6	5.18	0.669	0.520	1.575	0.075	0.692	29.6	9.3	F
M346608	D 2	17.0	12.8	40.0	2.12	20.1	8.10	0.669	0.502	1.575	0.083	0.793	46.3	9.5	F
M346808	D 2	17.0	12.3	40.0	2.34	22.0	12.67	0.669	0.485	1.575	0.092	0.865	72.4	9.4	G
233514	D 2	17.3	13.6	44.5	1.83	15.1	4.79	0.681	0.537	1.750	0.072	0.594	27.4	8.3	F
M346210	D 2	17.0	13.6	50.0	1.70	17.9	2.72	0.669	0.535	1.969	0.067	0.703	15.5	10.5	F
M346410	D 2	17.0	13.2	50.0	1.90	21.4	4.06	0.669	0.520	1.969	0.075	0.842	23.2	11.3	F
M346610	D 2	17.0	12.8	50.0	2.12	24.4	6.40	0.669	0.502	1.969	0.083	0.960	36.5	11.5	F
M346810	D 2	17.0	12.3	50.0	2.34	26.9	9.87	0.669	0.485	1.969	0.092	1.058	56.4	11.5	G
233516	D 2	17.3	13.6	50.8	1.83	16.9	4.13	0.681	0.537	2.000	0.072	0.666	23.6	9.3	F
M346212	D 2	17.0	13.6	60.0	1.70	21.3	2.20	0.669	0.535	2.362	0.067	0.837	12.6	12.5	F
M346412	D 2	17.0	13.2	60.0	1.90	25.2	3.34	0.669	0.520	2.362	0.075	0.991	19.0	13.3	F
M346612	D 2	17.0	12.8	60.0	2.12	29.2	5.17	0.669	0.502	2.362	0.083	1.148	29.5	13.8	G
M346812	D 2	17.0	12.3	60.0	2.34	31.8	8.09	0.669	0.485	2.362	0.092	1.251	46.2	13.6	G
233520	D 2	17.3	13.6	63.5	1.83	20.1	3.33	0.681	0.537	2.500	0.072	0.792	19.0	11.0	F
M346214	D 2	17.0	13.6	70.0	1.70	24.2	1.89	0.669	0.535	2.756	0.067	0.954	10.8	14.3	F
M346414	D 2	17.0	13.2	70.0	1.90	29.0	2.83	0.669	0.520	2.756	0.075	1.141	16.2	15.3	G
M346614	D 2	17.0	12.8	70.0	2.12	33.4	4.42	0.669	0.502	2.756	0.083	1.315	25.2	15.8	G
M346814	D 2	17.0	12.3	70.0	2.34	36.5	6.90	0.669	0.485	2.756	0.092	1.435	39.4	15.6	H
233524	D 2	17.3	13.6	76.2	1.83	23.3	2.79	0.681	0.537	3.000	0.072	0.918	15.9	12.8	F
M346216	D 2	17.0	13.6	80.0	1.70	27.2	1.65	0.669	0.535	3.150	0.067	1.071	9.4	16.0	F
M346416	D 2	17.0	13.2	80.0	1.90	32.8	2.46	0.669	0.520	3.150	0.075	1.290	14.0	17.3	G
M346616	D 2	17.0	12.8	80.0	2.12	38.2	3.80	0.669	0.502	3.150	0.083	1.502	21.7	18.0	H
M346816	D 2	17.0	12.3	80.0	2.34	41.4	5.97	0.669	0.485	3.150	0.092	1.629	34.1	17.7	H
233528	D 2	17.3	13.6	88.9	1.83	27.0	2.35	0.681	0.537	3.500	0.072	1.062	13.4	14.8	G
M346220	D 2	17.0	13.6	100.0	1.70	33.6	1.30	0.669	0.535	3.937	0.067	1.322	7.4	19.8	G
M346420	D 2	17.0	13.2	100.0	1.90	40.4	1.95	0.669	0.520	3.937	0.075	1.590	11.1	21.3	G
M346620	D 2	17.0	12.8	100.0	2.12	46.6	3.04	0.669	0.502	3.937	0.083	1.836	17.4	22.0	H
M346820	D 2	17.0	12.3	100.0	2.34	51.2	4.71	0.669	0.485	3.937	0.092	2.015	26.9	21.9	J
233532	D 2	17.3	13.6	101.6	1.83	30.2	2.07	0.681	0.537	4.000	0.072	1.188	11.8	16.5	G
M346224	D 2	17.0	13.6	120.0	1.70	40.0	1.08	0.669	0.535	4.724	0.067	1.573	6.1	23.5	H
M346424	D 2	17.0	13.2	120.0	1.90	48.0	1.61	0.669	0.520	4.724	0.075	1.889	9.2	25.3	H
M346624	D 2	17.0	12.8	120.0	2.12	55.7	2.51	0.669	0.502	4.724	0.083	2.191	14.3	26.3	J
M346824	D 2	17.0	12.3	120.0	2.34	61.0	3.89	0.669	0.485	4.724	0.092	2.401	22.2	26.1	K
233540	D 2	17.3	13.6	127.0	1.83	37.0	1.64	0.681	0.537	5.000	0.072	1.458	9.4	20.3	H
M346228	D 2	17.0	13.6	140.0	1.70	46.3	0.92	0.669	0.535	5.512	0.067	1.824	5.2	27.3	H
M346428	D 2	17.0	13.2	140.0	1.90	55.6	1.38	0.669	0.520	5.512	0.075	2.188	7.9	29.3	J
M346628	D 2	17.0	12.8	140.0	2.12	64.7	2.13	0.669	0.502	5.512	0.083	2.546	12.2	30.5	K
M346828	D 2	17.0	12.3	140.0	2.34	70.8	3.31	0.669	0.485	5.512	0.092	2.788	18.9	30.3	L
233548	D 2	17.3	13.6	152.4	1.83	43.9	1.36	0.681	0.537	6.000	0.072	1.728	7.8	24.0	J
243408	D 3	18.3	15.0	25.4	1.63	8.5	4.60	0.720	0.592	1.000	0.064	0.336	26.3	5.3	E
243508	D 3	18.1	14.4	25.4	1.83	9.6	7.92	0.713	0.569	1.000	0.072	0.378	45.2	5.3	E

Choose from millions of sizes - www.flexosprings.com

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	Lbs/in	approx.	
243608	D 3	17.9	13.8	25.4	2.03	11.2	12.08	0.705	0.545	1.000	0.080	0.440	69.0	5.5	E
243708	D 3	18.2	13.5	25.4	2.34	13.4	19.75	0.717	0.533	1.000	0.092	0.529	112.8	5.8	F
243808	D 3	17.7	12.4	25.4	2.64	15.2	37.72	0.697	0.489	1.000	0.104	0.598	215.4	5.8	G
243908	D 3	17.9	12.0	25.4	2.95	16.9	59.54	0.705	0.473	1.000	0.116	0.667	340.0	5.8	G
244008	D 3	17.6	11.1	25.4	3.25	18.7	99.94	0.693	0.437	1.000	0.128	0.736	570.7	5.8	H
243410	D 3	18.3	15.0	31.8	1.63	9.8	3.74	0.720	0.592	1.250	0.064	0.384	21.3	6.0	E
243510	D 3	18.1	14.4	31.8	1.83	11.4	6.06	0.713	0.569	1.250	0.072	0.450	34.6	6.3	E
243610	D 3	17.9	13.8	31.8	2.03	12.7	9.95	0.705	0.545	1.250	0.080	0.500	56.8	6.3	E
243710	D 3	18.2	13.5	31.8	2.34	15.2	16.46	0.717	0.533	1.250	0.092	0.598	94.0	6.5	F
243810	D 3	17.7	12.4	31.8	2.64	18.5	28.29	0.697	0.489	1.250	0.104	0.728	161.5	7.0	G
243910	D 3	17.9	12.0	31.8	2.95	20.6	44.66	0.705	0.473	1.250	0.116	0.812	255.0	7.0	H
244010	D 3	17.6	11.1	31.8	3.25	22.8	74.96	0.693	0.437	1.250	0.128	0.896	428.0	7.0	J
243412	D 3	18.3	15.0	38.1	1.63	11.4	2.99	0.720	0.592	1.500	0.064	0.448	17.1	7.0	E
243512	D 3	18.1	14.4	38.1	1.83	12.8	5.15	0.713	0.569	1.500	0.072	0.504	29.4	7.0	E
243612	D 3	17.9	13.8	38.1	2.03	14.7	8.06	0.705	0.545	1.500	0.080	0.580	46.0	7.3	F
243712	D 3	18.2	13.5	38.1	2.34	17.5	13.47	0.717	0.533	1.500	0.092	0.690	76.9	7.5	F
243812	D 3	17.7	12.4	38.1	2.64	21.1	23.58	0.697	0.489	1.500	0.104	0.832	134.6	8.0	G
243912	D 3	17.9	12.0	38.1	2.95	23.6	37.21	0.705	0.473	1.500	0.116	0.928	212.5	8.0	H
244012	D 3	17.6	11.1	38.1	3.25	26.0	62.46	0.693	0.437	1.500	0.128	1.024	356.7	8.0	J
M366308	D 3	18.0	14.3	40.0	1.83	15.1	4.20	0.709	0.565	1.575	0.072	0.594	24.0	8.3	E
M366508	D 3	18.0	13.9	40.0	2.03	17.8	6.15	0.709	0.549	1.575	0.080	0.700	35.1	8.8	F
M366708	D 3	18.0	13.5	40.0	2.24	20.2	9.11	0.709	0.532	1.575	0.088	0.794	52.0	9.0	F
M366908	D 3	18.0	13.0	40.0	2.50	23.1	14.34	0.709	0.512	1.575	0.098	0.910	81.9	9.3	G
243414	D 3	18.3	15.0	44.5	1.63	12.6	2.60	0.720	0.592	1.750	0.064	0.496	14.8	7.8	E
243514	D 3	18.1	14.4	44.5	1.83	14.6	4.29	0.713	0.569	1.750	0.072	0.576	24.5	8.0	F
243614	D 3	17.9	13.8	44.5	2.03	16.8	6.77	0.705	0.545	1.750	0.080	0.660	38.6	8.3	F
243714	D 3	18.2	13.5	44.5	2.34	19.9	11.40	0.717	0.533	1.750	0.092	0.782	65.1	8.5	G
243814	D 3	17.7	12.4	44.5	2.64	23.8	20.21	0.697	0.489	1.750	0.104	0.936	115.4	9.0	G
243914	D 3	17.9	12.0	44.5	2.95	27.3	30.80	0.705	0.473	1.750	0.116	1.073	175.8	9.3	H
244014	D 3	17.6	11.1	44.5	3.25	30.1	51.69	0.693	0.437	1.750	0.128	1.184	295.2	9.3	J
M366310	D 3	18.0	14.3	50.0	1.83	18.3	3.28	0.709	0.565	1.969	0.072	0.720	18.7	10.0	F
M366510	D 3	18.0	13.9	50.0	2.03	21.3	4.88	0.709	0.549	1.969	0.080	0.840	27.9	10.5	F
M366710	D 3	18.0	13.5	50.0	2.24	24.6	7.08	0.709	0.532	1.969	0.088	0.970	40.4	11.0	G
M366910	D 3	18.0	13.0	50.0	2.50	28.1	11.24	0.709	0.512	1.969	0.098	1.107	64.2	11.3	G
243416	D 3	18.3	15.0	50.8	1.63	13.8	2.30	0.720	0.592	2.000	0.064	0.544	13.1	8.5	E
243516	D 3	18.1	14.4	50.8	1.83	16.0	3.81	0.713	0.569	2.000	0.072	0.630	21.8	8.8	F
243616	D 3	17.9	13.8	50.8	2.03	18.3	6.04	0.705	0.545	2.000	0.080	0.720	34.5	9.0	F
243716	D 3	18.2	13.5	50.8	2.34	22.2	9.88	0.717	0.533	2.000	0.092	0.874	56.4	9.5	G
243816	D 3	17.7	12.4	50.8	2.64	27.1	17.15	0.697	0.489	2.000	0.104	1.066	97.9	10.3	H
243916	D 3	17.9	12.0	50.8	2.95	30.2	27.06	0.705	0.473	2.000	0.116	1.189	154.5	10.3	J
244016	D 3	17.6	11.1	50.8	3.25	33.3	45.43	0.693	0.437	2.000	0.128	1.312	259.4	10.3	K
M366312	D 3	18.0	14.3	60.0	1.83	21.5	2.69	0.709	0.565	2.362	0.072	0.846	15.4	11.8	F
M366512	D 3	18.0	13.9	60.0	2.03	25.4	3.95	0.709	0.549	2.362	0.080	1.000	22.6	12.5	F
M366712	D 3	18.0	13.5	60.0	2.24	29.1	5.80	0.709	0.532	2.362	0.088	1.146	33.1	13.0	G
M366912	D 3	18.0	13.0	60.0	2.50	33.1	9.24	0.709	0.512	2.362	0.098	1.304	52.8	13.3	H
243420	D 3	18.3	15.0	63.5	1.63	16.7	1.81	0.720	0.592	2.500	0.064	0.656	10.3	10.3	F
243520	D 3	18.1	14.4	63.5	1.83	19.2	3.03	0.713	0.569	2.500	0.072	0.756	17.3	10.5	F
243620	D 3	17.9	13.8	63.5	2.03	22.4	4.70	0.705	0.545	2.500	0.080	0.880	26.8	11.0	F
243720	D 3	18.2	13.5	63.5	2.34	26.9	7.80	0.717	0.533	2.500	0.092	1.058	44.5	11.5	G
243820	D 3	17.7	12.4	63.5	2.64	32.4	13.80	0.697	0.489	2.500	0.104	1.274	78.8	12.3	H
243920	D 3	17.9	12.0	63.5	2.95	36.8	21.26	0.705	0.473	2.500	0.116	1.450	121.4	12.5	J

For Sales or Assistance - Tel 0117 967 3313

All characteristics are nominal

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	lbs/in	approx	
244020	D 3	17.6	11.1	63.5	3.25	40.6	35.69	0.693	0.437	2.500	0.128	1.600	203.8	12.5	K
M366314	D 3	18.0	14.3	70.0	1.83	24.7	2.28	0.709	0.565	2.756	0.072	0.972	13.0	13.5	F
M366514	D 3	18.0	13.9	70.0	2.03	29.5	3.32	0.709	0.549	2.756	0.080	1.160	19.0	14.5	G
M366714	D 3	18.0	13.5	70.0	2.24	33.6	4.90	0.709	0.532	2.756	0.088	1.323	28.0	15.0	H
M366914	D 3	18.0	13.0	70.0	2.50	38.8	7.70	0.709	0.512	2.756	0.098	1.526	44.0	15.5	H
243424	D 3	18.3	15.0	76.2	1.63	19.1	1.53	0.720	0.592	3.000	0.064	0.752	8.8	11.8	F
243524	D 3	18.1	14.4	76.2	1.83	22.4	2.51	0.713	0.569	3.000	0.072	0.882	14.3	12.3	F
243624	D 3	17.9	13.8	76.2	2.03	25.9	3.93	0.705	0.545	3.000	0.080	1.020	22.5	12.8	G
243724	D 3	18.2	13.5	76.2	2.34	31.5	6.44	0.717	0.533	3.000	0.092	1.242	36.8	13.5	H
243824	D 3	17.7	12.4	76.2	2.64	38.3	11.32	0.697	0.489	3.000	0.104	1.508	64.6	14.5	J
243924	D 3	17.9	12.0	76.2	2.95	42.7	17.86	0.705	0.473	3.000	0.116	1.682	102.0	14.5	K
244024	D 3	17.6	11.1	76.2	3.25	47.1	29.98	0.693	0.437	3.000	0.128	1.856	171.2	14.5	L
M366316	D 3	18.0	14.3	80.0	1.83	28.3	1.94	0.709	0.565	3.150	0.072	1.116	11.1	15.5	G
M366516	D 3	18.0	13.9	80.0	2.03	33.5	2.86	0.709	0.549	3.150	0.080	1.320	16.3	16.5	G
M366716	D 3	18.0	13.5	80.0	2.24	38.1	4.25	0.709	0.532	3.150	0.088	1.499	24.3	17.0	H
M366916	D 3	18.0	13.0	80.0	2.50	43.8	6.71	0.709	0.512	3.150	0.098	1.722	38.3	17.5	J
243428	D 3	18.3	15.0	88.9	1.63	22.0	1.30	0.720	0.592	3.500	0.064	0.864	7.4	13.5	F
243528	D 3	18.1	14.4	88.9	1.83	25.6	2.15	0.713	0.569	3.500	0.072	1.008	12.3	14.0	G
243628	D 3	17.9	13.8	88.9	2.03	30.0	3.32	0.705	0.545	3.500	0.080	1.180	18.9	14.8	G
243728	D 3	18.2	13.5	88.9	2.34	36.2	5.49	0.717	0.533	3.500	0.092	1.426	31.3	15.5	H
243828	D 3	17.7	12.4	88.9	2.64	43.6	9.76	0.697	0.489	3.500	0.104	1.716	55.7	16.5	J
243928	D 3	17.9	12.0	88.9	2.95	49.3	15.14	0.705	0.473	3.500	0.116	1.943	86.4	16.8	K
244028	D 3	17.6	11.1	88.9	3.25	54.5	25.41	0.693	0.437	3.500	0.128	2.144	145.1	16.8	L
M366320	D 3	18.0	14.3	100.0	1.83	34.8	1.54	0.709	0.565	3.937	0.072	1.368	8.8	19.0	G
M366520	D 3	18.0	13.9	100.0	2.03	41.1	2.27	0.709	0.549	3.937	0.080	1.620	13.0	20.3	H
M366720	D 3	18.0	13.5	100.0	2.24	47.0	3.36	0.709	0.532	3.937	0.088	1.852	19.2	21.0	J
M366920	D 3	18.0	13.0	100.0	2.50	54.4	5.26	0.709	0.512	3.937	0.098	2.141	30.1	21.8	K
243432	D 3	18.3	15.0	101.6	1.63	24.8	1.13	0.720	0.592	4.000	0.064	0.976	6.4	15.3	G
243532	D 3	18.1	14.4	101.6	1.83	28.8	1.87	0.713	0.569	4.000	0.072	1.134	10.7	15.8	G
243632	D 3	17.9	13.8	101.6	2.03	33.5	2.92	0.705	0.545	4.000	0.080	1.320	16.7	16.5	H
243732	D 3	18.2	13.5	101.6	2.34	40.9	4.78	0.717	0.533	4.000	0.092	1.610	27.3	17.5	J
243832	D 3	17.7	12.4	101.6	2.64	48.9	8.57	0.697	0.489	4.000	0.104	1.924	49.0	18.5	K
243932	D 3	17.9	12.0	101.6	2.95	55.2	13.33	0.705	0.473	4.000	0.116	2.175	76.1	18.8	L
244032	D 3	17.6	11.1	101.6	3.25	61.8	22.05	0.693	0.437	4.000	0.128	2.432	125.9	19.0	M
M366324	D 3	18.0	14.3	120.0	1.83	41.2	1.28	0.709	0.565	4.724	0.072	1.620	7.3	22.5	H
M366524	D 3	18.0	13.9	120.0	2.03	48.8	1.89	0.709	0.549	4.724	0.080	1.920	10.8	24.0	J
M366724	D 3	18.0	13.5	120.0	2.24	56.0	2.77	0.709	0.532	4.724	0.088	2.205	15.8	25.0	J
M366924	D 3	18.0	13.0	120.0	2.50	65.0	4.33	0.709	0.512	4.724	0.098	2.559	24.7	26.0	K
243440	D 3	18.3	15.0	127.0	1.63	30.1	0.91	0.720	0.592	5.000	0.064	1.184	5.2	18.5	H
243540	D 3	18.1	14.4	127.0	1.83	35.2	1.49	0.713	0.569	5.000	0.072	1.386	8.5	19.3	H
243640	D 3	17.9	13.8	127.0	2.03	41.1	2.32	0.705	0.545	5.000	0.080	1.620	13.2	20.3	J
243740	D 3	18.2	13.5	127.0	2.34	50.2	3.80	0.717	0.533	5.000	0.092	1.978	21.7	21.5	K
243840	D 3	17.7	12.4	127.0	2.64	60.8	6.74	0.697	0.489	5.000	0.104	2.392	38.5	23.0	L
243940	D 3	17.9	12.0	127.0	2.95	68.5	10.51	0.705	0.473	5.000	0.116	2.697	60.0	23.3	M
244040	D 3	17.6	11.1	127.0	3.25	76.4	17.43	0.693	0.437	5.000	0.128	3.008	99.5	23.5	N
M366328	D 3	18.0	14.3	140.0	1.83	47.6	1.09	0.709	0.565	5.512	0.072	1.872	6.2	26.0	H
M366528	D 3	18.0	13.9	140.0	2.03	56.4	1.61	0.709	0.549	5.512	0.080	2.220	9.2	27.8	J
M366728	D 3	18.0	13.5	140.0	2.24	65.0	2.36	0.709	0.532	5.512	0.088	2.557	13.5	29.0	K
M366928	D 3	18.0	13.0	140.0	2.50	75.0	3.71	0.709	0.512	5.512	0.098	2.953	21.2	30.0	L
243448	D 3	18.3	15.0	152.4	1.63	35.8	0.75	0.720	0.592	6.000	0.064	1.408	4.3	22.0	H
243548	D 3	18.1	14.4	152.4	1.83	41.6	1.24	0.713	0.569	6.000	0.072	1.638	7.1	22.8	J

Choose from millions of sizes - www.flexosprings.com

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No. of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	Lbs/in	approx	
243648	D 3	17.9	13.8	152.4	2.03	48.8	1.92	0.705	0.545	6.000	0.080	1.920	11.0	24.0	K
243748	D 3	18.2	13.5	152.4	2.34	59.0	3.19	0.717	0.533	6.000	0.092	2.323	18.2	25.3	L
243848	D 3	17.7	12.4	152.4	2.64	72.0	5.60	0.697	0.489	6.000	0.104	2.834	32.0	27.3	M
243948	D 3	17.9	12.0	152.4	2.95	81.0	8.76	0.705	0.473	6.000	0.116	3.190	50.0	27.5	N
244048	D 3	17.6	11.1	152.4	3.25	90.2	14.55	0.693	0.437	6.000	0.128	3.552	83.1	27.8	P
253508	D 4	18.9	15.2	25.4	1.83	9.1	7.43	0.744	0.600	1.000	0.072	0.360	42.4	5.0	E
263608	D 4	19.5	15.4	25.4	2.03	10.2	10.57	0.768	0.608	1.000	0.080	0.400	60.3	5.0	E
263708	D 4	19.8	15.1	25.4	2.34	12.3	17.08	0.780	0.596	1.000	0.092	0.483	97.5	5.3	F
263808	D 4	19.3	14.0	25.4	2.64	14.5	29.85	0.760	0.552	1.000	0.104	0.572	170.5	5.5	G
263908	D 4	19.6	13.7	25.4	2.95	16.2	46.18	0.772	0.540	1.000	0.116	0.638	263.7	5.5	G
264008	D 4	19.2	12.7	25.4	3.25	17.9	77.98	0.756	0.500	1.000	0.128	0.704	445.3	5.5	H
253510	D 4	18.9	15.2	31.8	1.83	11.0	5.57	0.744	0.600	1.250	0.072	0.432	31.8	6.0	E
263610	D 4	19.5	15.4	31.8	2.03	12.2	7.93	0.768	0.608	1.250	0.080	0.480	45.3	6.0	E
263710	D 4	19.8	15.1	31.8	2.34	14.6	13.06	0.780	0.596	1.250	0.092	0.575	74.6	6.3	F
263810	D 4	19.3	14.0	31.8	2.64	17.2	23.22	0.760	0.552	1.250	0.104	0.676	132.6	6.5	G
263910	D 4	19.6	13.7	31.8	2.95	19.1	35.92	0.772	0.540	1.250	0.116	0.754	205.1	6.5	H
264010	D 4	19.2	12.7	31.8	3.25	21.9	57.46	0.756	0.500	1.250	0.128	0.864	328.1	6.8	J
253512	D 4	18.9	15.2	38.1	1.83	12.3	4.69	0.744	0.600	1.500	0.072	0.486	26.8	6.8	E
263612	D 4	19.5	15.4	38.1	2.03	13.7	6.68	0.768	0.608	1.500	0.080	0.540	38.1	6.8	F
263712	D 4	19.8	15.1	38.1	2.34	16.4	11.10	0.780	0.596	1.500	0.092	0.644	63.4	7.0	F
263812	D 4	19.3	14.0	38.1	2.64	19.8	19.00	0.760	0.552	1.500	0.104	0.780	108.5	7.5	G
263912	D 4	19.6	13.7	38.1	2.95	22.1	29.39	0.772	0.540	1.500	0.116	0.870	167.8	7.5	H
264012	D 4	19.2	12.7	38.1	3.25	25.2	47.47	0.756	0.500	1.500	0.128	0.992	271.0	7.8	J
M386408	D 4	19.0	15.2	40.0	1.90	15.2	4.31	0.748	0.598	1.575	0.075	0.598	24.6	8.0	F
M386608	D 4	19.0	14.8	40.0	2.12	17.5	6.66	0.748	0.581	1.575	0.083	0.689	38.0	8.3	F
M386808	D 4	19.0	14.3	40.0	2.34	19.4	10.14	0.748	0.564	1.575	0.092	0.764	57.9	8.3	G
M387008	D 4	19.0	13.7	40.0	2.64	23.1	16.35	0.748	0.540	1.575	0.104	0.910	93.3	8.8	G
253514	D 4	18.9	15.2	44.5	1.83	14.2	3.88	0.744	0.600	1.750	0.072	0.558	22.1	7.8	F
263614	D 4	19.5	15.4	44.5	2.03	15.7	5.51	0.768	0.608	1.750	0.080	0.620	31.5	7.8	F
263714	D 4	19.8	15.1	44.5	2.34	18.7	9.25	0.780	0.596	1.750	0.092	0.736	52.8	8.0	G
263814	D 4	19.3	14.0	44.5	2.64	22.5	16.07	0.760	0.552	1.750	0.104	0.884	91.8	8.5	G
263914	D 4	19.6	13.7	44.5	2.95	25.0	24.87	0.772	0.540	1.750	0.116	0.986	142.0	8.5	H
264014	D 4	19.2	12.7	44.5	3.25	28.4	40.43	0.756	0.500	1.750	0.128	1.120	230.9	8.8	J
M386410	D 4	19.0	15.2	50.0	1.90	18.5	3.33	0.748	0.598	1.969	0.075	0.729	19.0	9.8	F
M386610	D 4	19.0	14.8	50.0	2.12	21.2	5.20	0.748	0.581	1.969	0.083	0.835	29.7	10.0	F
M386810	D 4	19.0	14.3	50.0	2.34	23.6	7.89	0.748	0.564	1.969	0.092	0.929	45.1	10.1	G
M387010	D 4	19.0	13.7	50.0	2.64	28.4	12.61	0.748	0.540	1.969	0.104	1.118	72.0	10.8	H
253516	D 4	18.9	15.2	50.8	1.83	15.5	3.43	0.744	0.600	2.000	0.072	0.612	19.6	8.5	F
263616	D 4	19.5	15.4	50.8	2.03	17.3	4.88	0.768	0.608	2.000	0.080	0.680	27.9	8.5	F
263716	D 4	19.8	15.1	50.8	2.34	20.4	8.23	0.780	0.596	2.000	0.092	0.805	47.0	8.8	G
263816	D 4	19.3	14.0	50.8	2.64	24.4	14.41	0.760	0.552	2.000	0.104	0.962	82.3	9.3	H
263916	D 4	19.6	13.7	50.8	2.95	27.3	22.30	0.772	0.540	2.000	0.116	1.073	127.3	9.3	J
264016	D 4	19.2	12.7	50.8	3.25	31.7	35.22	0.756	0.500	2.000	0.128	1.248	201.1	9.8	K
M386412	D 4	19.0	15.2	60.0	1.90	21.4	2.79	0.748	0.598	2.362	0.075	0.842	15.9	11.3	F
M386612	D 4	19.0	14.8	60.0	2.12	25.4	4.16	0.748	0.581	2.362	0.083	1.002	23.8	12.0	G
M386812	D 4	19.0	14.3	60.0	2.34	27.8	6.46	0.748	0.564	2.362	0.092	1.095	36.9	11.9	G
M387012	D 4	19.0	13.7	60.0	2.64	33.7	10.26	0.748	0.540	2.362	0.104	1.326	58.6	12.8	H
253520	D 4	18.9	15.2	63.5	1.83	18.3	2.79	0.744	0.600	2.500	0.072	0.720	15.9	10.0	F
263620	D 4	19.5	15.4	63.5	2.03	20.8	3.84	0.768	0.608	2.500	0.080	0.820	21.9	10.3	F
263720	D 4	19.8	15.1	63.5	2.34	24.5	6.53	0.780	0.596	2.500	0.092	0.966	37.3	10.5	G
263820	D 4	19.3	14.0	63.5	2.64	29.7	11.30	0.760	0.552	2.500	0.104	1.170	64.5	11.3	H

For Sales or Assistance - Tel 0117 967 3313

All characteristics are nominal


Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No. of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	lbs/in		
263920	D 4	19.6	13.7	63.5	2.95	33.1	17.47	0.772	0.540	2.500	0.116	1.305	99.8	11.3	J
264020	D 4	19.2	12.7	63.5	3.25	38.2	27.99	0.756	0.500	2.500	0.128	1.504	159.8	11.8	K
M386414	D 4	19.0	15.2	70.0	1.90	24.7	2.35	0.748	0.598	2.756	0.075	0.972	13.4	13.0	G
M386614	D 4	19.0	14.8	70.0	2.12	29.2	3.54	0.748	0.581	2.756	0.083	1.148	20.2	13.8	G
M386814	D 4	19.0	14.3	70.0	2.34	32.0	5.46	0.748	0.564	2.756	0.092	1.261	31.2	13.7	H
M387014	D 4	19.0	13.7	70.0	2.64	39.0	8.65	0.748	0.540	2.756	0.104	1.534	49.4	14.8	J
253524	D 4	18.9	15.2	76.2	1.83	21.5	2.29	0.744	0.600	3.000	0.072	0.846	13.1	11.8	F
263624	D 4	19.5	15.4	76.2	2.03	23.9	3.25	0.768	0.608	3.000	0.080	0.940	18.6	11.8	G
263724	D 4	19.8	15.1	76.2	2.34	29.2	5.29	0.780	0.596	3.000	0.092	1.150	30.2	12.5	H
263824	D 4	19.3	14.0	76.2	2.64	35.0	9.29	0.760	0.552	3.000	0.104	1.378	53.0	13.3	J
263924	D 4	19.6	13.7	76.2	2.95	39.0	14.37	0.772	0.540	3.000	0.116	1.537	82.0	13.3	K
264024	D 4	19.2	12.7	76.2	3.25	44.7	23.23	0.756	0.500	3.000	0.128	1.760	132.6	13.8	L
M386416	D 4	19.0	15.2	80.0	1.90	28.0	2.03	0.748	0.598	3.150	0.075	1.103	11.6	14.8	G
M386616	D 4	19.0	14.8	80.0	2.12	32.9	3.08	0.748	0.581	3.150	0.083	1.294	17.6	15.5	H
M386816	D 4	19.0	14.3	80.0	2.34	36.2	4.73	0.748	0.564	3.150	0.092	1.426	27.0	15.5	H
M387016	D 4	19.0	13.7	80.0	2.64	44.3	7.48	0.748	0.540	3.150	0.104	1.742	42.7	16.8	J
253528	D 4	18.9	15.2	88.9	1.83	24.7	1.94	0.744	0.600	3.500	0.072	0.972	11.1	13.5	G
263628	D 4	19.5	15.4	88.9	2.03	27.4	2.76	0.768	0.608	3.500	0.080	1.080	15.7	13.5	G
263728	D 4	19.8	15.1	88.9	2.34	33.3	4.53	0.780	0.596	3.500	0.092	1.311	25.9	14.3	H
263828	D 4	19.3	14.0	88.9	2.64	39.6	8.04	0.760	0.552	3.500	0.104	1.560	45.9	15.0	J
263928	D 4	19.6	13.7	88.9	2.95	44.2	12.43	0.772	0.540	3.500	0.116	1.740	71.0	15.0	K
264028	D 4	19.2	12.7	88.9	3.25	51.2	19.85	0.756	0.500	3.500	0.128	2.016	113.3	15.8	L
M386420	D 4	19.0	15.2	100.0	1.90	34.2	1.61	0.748	0.598	3.937	0.075	1.346	9.2	18.0	G
M386620	D 4	19.0	14.8	100.0	2.12	40.3	2.45	0.748	0.581	3.937	0.083	1.586	14.0	19.0	H
M386820	D 4	19.0	14.3	100.0	2.34	44.6	3.74	0.748	0.564	3.937	0.092	1.757	21.3	19.1	J
M387020	D 4	19.0	13.7	100.0	2.64	54.8	5.88	0.748	0.540	3.937	0.104	2.158	33.6	20.8	K
253532	D 4	18.9	15.2	101.6	1.83	27.4	1.72	0.744	0.600	4.000	0.072	1.080	9.8	15.0	G
263632	D 4	19.5	15.4	101.6	2.03	30.5	2.44	0.768	0.608	4.000	0.080	1.200	13.9	15.0	H
263732	D 4	19.8	15.1	101.6	2.34	37.4	3.97	0.780	0.596	4.000	0.092	1.472	22.6	16.0	J
263832	D 4	19.3	14.0	101.6	2.64	44.9	6.97	0.760	0.552	4.000	0.104	1.768	39.8	17.0	K
263932	D 4	19.6	13.7	101.6	2.95	50.1	10.78	0.772	0.540	4.000	0.116	1.972	61.5	17.0	L
264032	D 4	19.2	12.7	101.6	3.25	57.7	17.33	0.756	0.500	4.000	0.128	2.272	98.9	17.8	M
M386424	D 4	19.0	15.2	120.0	1.90	40.9	1.32	0.748	0.598	4.724	0.075	1.608	7.6	21.5	H
M386624	D 4	19.0	14.8	120.0	2.12	48.2	2.01	0.748	0.581	4.724	0.083	1.899	11.5	22.8	J
M386824	D 4	19.0	14.3	120.0	2.34	52.8	3.10	0.748	0.564	4.724	0.092	2.079	17.7	22.6	K
M387024	D 4	19.0	13.7	120.0	2.64	65.4	4.85	0.748	0.540	4.724	0.104	2.574	27.7	24.8	L
253540	D 4	18.9	15.2	127.0	1.83	33.8	1.35	0.744	0.600	5.000	0.072	1.332	7.7	18.5	H
263640	D 4	19.5	15.4	127.0	2.03	37.6	1.92	0.768	0.608	5.000	0.080	1.480	11.0	18.5	J
263740	D 4	19.8	15.1	127.0	2.34	46.2	3.13	0.780	0.596	5.000	0.092	1.817	17.9	19.8	K
263840	D 4	19.3	14.0	127.0	2.64	54.8	5.57	0.760	0.552	5.000	0.104	2.158	31.8	20.8	L
263940	D 4	19.6	13.7	127.0	2.95	61.1	8.62	0.772	0.540	5.000	0.116	2.407	49.2	20.8	M
264040	D 4	19.2	12.7	127.0	3.25	71.5	13.65	0.756	0.500	5.000	0.128	2.816	77.9	22.0	N
M386428	D 4	19.0	15.2	140.0	1.90	47.0	1.14	0.748	0.598	5.512	0.075	1.851	6.5	24.8	J
M386628	D 4	19.0	14.8	140.0	2.12	55.7	1.72	0.748	0.581	5.512	0.083	2.191	9.8	26.3	K
M386828	D 4	19.0	14.3	140.0	2.34	61.2	2.64	0.748	0.564	5.512	0.092	2.411	15.1	26.2	L
M387028	D 4	19.0	13.7	140.0	2.64	76.0	4.12	0.748	0.540	5.512	0.104	2.990	23.6	28.8	M
253548	D 4	18.9	15.2	152.4	1.83	39.8	1.13	0.744	0.600	6.000	0.072	1.566	6.4	21.8	J
263648	D 4	19.5	15.4	152.4	2.03	44.2	1.61	0.768	0.608	6.000	0.080	1.740	9.2	21.8	K
263748	D 4	19.8	15.1	152.4	2.34	54.3	2.61	0.780	0.596	6.000	0.092	2.139	14.9	23.3	L
263848	D 4	19.3	14.0	152.4	2.64	65.4	4.59	0.760	0.552	6.000	0.104	2.574	26.2	24.8	M
263948	D 4	19.6	13.7	152.4	2.95	72.9	7.11	0.772	0.540	6.000	0.116	2.871	40.6	24.8	N

Choose from millions of sizes - www.flexosprings.com

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	lbs/in		
264048	D 4	19.2	12.7	152.4	3.25	84.5	11.37	0.756	0.500	6.000	0.128	3.328	64.9	26.0	P
273508	D 5	20.5	16.8	25.4	1.83	8.7	6.20	0.807	0.663	1.000	0.072	0.342	35.4	4.8	E
273510	D 5	20.5	16.8	31.8	1.83	10.1	4.87	0.807	0.663	1.250	0.072	0.396	27.8	5.5	E
273512	D 5	20.5	16.8	38.1	1.83	11.4	4.01	0.807	0.663	1.500	0.072	0.450	22.9	6.3	E
M406508	D 5	20.0	15.9	40.0	2.03	15.7	5.07	0.787	0.627	1.575	0.080	0.620	28.9	7.8	F
M406708	D 5	20.0	15.5	40.0	2.24	17.9	7.42	0.787	0.611	1.575	0.088	0.706	42.4	8.0	F
M406908	D 5	20.0	15.0	40.0	2.50	20.6	11.56	0.787	0.591	1.575	0.098	0.812	66.0	8.3	G
M407108	D 5	20.0	14.4	40.0	2.80	23.1	19.16	0.787	0.567	1.575	0.110	0.909	109.4	8.3	H
273514	D 5	20.5	16.8	44.5	1.83	12.8	3.41	0.807	0.663	1.750	0.072	0.504	19.5	7.0	F
M406510	D 5	20.0	15.9	50.0	2.03	18.8	4.02	0.787	0.627	1.969	0.080	0.740	22.9	9.3	F
M406710	D 5	20.0	15.5	50.0	2.24	21.8	5.75	0.787	0.611	1.969	0.088	0.860	32.8	9.8	G
M406910	D 5	20.0	15.0	50.0	2.50	25.0	9.03	0.787	0.591	1.969	0.098	0.984	51.6	10.0	G
M407110	D 5	20.0	14.4	50.0	2.80	28.7	14.51	0.787	0.567	1.969	0.110	1.130	82.9	10.3	H
273516	D 5	20.5	16.8	50.8	1.83	14.2	2.96	0.807	0.663	2.000	0.072	0.558	16.9	7.8	F
M406512	D 5	20.0	15.9	60.0	2.03	22.4	3.24	0.787	0.627	2.362	0.080	0.880	18.5	11.0	F
M406712	D 5	20.0	15.5	60.0	2.24	25.8	4.69	0.787	0.611	2.362	0.088	1.014	26.8	11.5	G
M406912	D 5	20.0	15.0	60.0	2.50	30.0	7.22	0.787	0.591	2.362	0.098	1.181	41.3	12.0	H
M407112	D 5	20.0	14.4	60.0	2.80	33.6	11.97	0.787	0.567	2.362	0.110	1.323	68.4	12.0	J
273520	D 5	20.5	16.8	63.5	1.83	17.4	2.27	0.807	0.663	2.500	0.072	0.684	13.0	9.5	F
M406514	D 5	20.0	15.9	70.0	2.03	25.4	2.77	0.787	0.627	2.756	0.080	1.000	15.8	12.5	G
M406714	D 5	20.0	15.5	70.0	2.24	29.1	4.05	0.787	0.611	2.756	0.088	1.146	23.1	13.0	H
M406914	D 5	20.0	15.0	70.0	2.50	34.4	6.15	0.787	0.591	2.756	0.098	1.353	35.1	13.8	H
M407114	D 5	20.0	14.4	70.0	2.80	39.2	9.98	0.787	0.567	2.756	0.110	1.543	57.0	14.0	J
273524	D 5	20.5	16.8	76.2	1.83	20.1	1.89	0.807	0.663	3.000	0.072	0.792	10.8	11.0	F
M406516	D 5	20.0	15.9	80.0	2.03	29.0	2.38	0.787	0.627	3.150	0.080	1.140	13.6	14.3	G
M406716	D 5	20.0	15.5	80.0	2.24	33.0	3.49	0.787	0.611	3.150	0.088	1.301	20.0	14.8	H
M406916	D 5	20.0	15.0	80.0	2.50	38.8	5.35	0.787	0.591	3.150	0.098	1.526	30.6	15.5	J
M407116	D 5	20.0	14.4	80.0	2.80	44.8	8.55	0.787	0.567	3.150	0.110	1.764	48.8	16.0	K
273528	D 5	20.5	16.8	88.9	1.83	22.9	1.62	0.807	0.663	3.500	0.072	0.900	9.3	12.5	G
M406520	D 5	20.0	15.9	100.0	2.03	35.6	1.88	0.787	0.627	3.937	0.080	1.400	10.7	17.5	H
M406720	D 5	20.0	15.5	100.0	2.24	40.9	2.74	0.787	0.611	3.937	0.088	1.609	15.7	18.3	J
M406920	D 5	20.0	15.0	100.0	2.50	48.1	4.19	0.787	0.591	3.937	0.098	1.895	23.9	19.3	K
M407120	D 5	20.0	14.4	100.0	2.80	55.3	6.75	0.787	0.567	3.937	0.110	2.177	38.5	19.8	L
273532	D 5	20.5	16.8	101.6	1.83	25.6	1.42	0.807	0.663	4.000	0.072	1.008	8.1	14.0	G
M406524	D 5	20.0	15.9	120.0	2.03	41.7	1.57	0.787	0.627	4.724	0.080	1.640	9.0	20.5	J
M406724	D 5	20.0	15.5	120.0	2.24	48.7	2.26	0.787	0.611	4.724	0.088	1.918	12.9	21.8	J
M406924	D 5	20.0	15.0	120.0	2.50	57.5	3.44	0.787	0.591	4.724	0.098	2.264	19.6	23.0	K
M407124	D 5	20.0	14.4	120.0	2.80	65.8	5.57	0.787	0.567	4.724	0.110	2.591	31.8	23.5	L
273540	D 5	20.5	16.8	127.0	1.83	31.1	1.14	0.807	0.663	5.000	0.072	1.224	6.5	17.0	H
M406528	D 5	20.0	15.9	140.0	2.03	48.3	1.34	0.787	0.627	5.512	0.080	1.900	7.6	23.8	J
M406728	D 5	20.0	15.5	140.0	2.24	56.6	1.92	0.787	0.611	5.512	0.088	2.227	10.9	25.3	K
M406928	D 5	20.0	15.0	140.0	2.50	66.3	2.95	0.787	0.591	5.512	0.098	2.608	16.8	26.5	L
M407128	D 5	20.0	14.4	140.0	2.80	76.3	4.74	0.787	0.567	5.512	0.110	3.004	27.1	27.3	M
273548	D 5	20.5	16.8	152.4	1.83	36.6	0.95	0.807	0.663	6.000	0.072	1.440	5.4	20.0	J
283508	D 6	21.2	17.5	25.4	1.83	8.7	5.55	0.835	0.691	1.000	0.072	0.342	31.7	4.8	E
283608	D 6	21.1	17.0	25.4	2.03	9.7	8.86	0.831	0.671	1.000	0.080	0.380	50.6	4.8	E
283708	D 6	21.4	16.7	25.4	2.34	11.7	14.23	0.843	0.659	1.000	0.092	0.460	81.2	5.0	F
283808	D 6	20.9	15.6	25.4	2.64	13.9	24.42	0.823	0.615	1.000	0.104	0.546	139.4	5.3	G
283908	D 6	21.2	15.3	25.4	2.95	15.5	37.77	0.835	0.603	1.000	0.116	0.609	215.7	5.3	G
284008	D 6	20.7	14.2	25.4	3.25	17.1	64.13	0.815	0.559	1.000	0.128	0.672	366.2	5.3	H
304108	D 6	21.9	14.6	25.4	3.66	18.3	97.46	0.862	0.574	1.000	0.144	0.720	556.5	5.0	J

For Sales or Assistance - Tel 0117 967 3313

All characteristics are nominal



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No. of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	Lbs/in		
283510	D 6	21.2	17.5	31.8	1.83	10.1	4.36	0.835	0.691	1.250	0.072	0.396	24.9	5.5	E
283610	D 6	21.1	17.0	31.8	2.03	11.2	6.96	0.831	0.671	1.250	0.080	0.440	39.8	5.5	E
283710	D 6	21.4	16.7	31.8	2.34	13.4	11.38	0.843	0.659	1.250	0.092	0.529	65.0	5.8	F
283810	D 6	20.9	15.6	31.8	2.64	15.9	19.84	0.823	0.615	1.250	0.104	0.624	113.3	6.0	G
283910	D 6	21.2	15.3	31.8	2.95	17.7	30.69	0.835	0.603	1.250	0.116	0.696	175.2	6.0	H
284010	D 6	20.7	14.2	31.8	3.25	20.3	49.04	0.815	0.559	1.250	0.128	0.800	280.0	6.3	J
304110	D 6	21.9	14.6	31.8	3.66	21.9	73.09	0.862	0.574	1.250	0.144	0.864	417.4	6.0	J
283512	D 6	21.2	17.5	38.1	1.83	11.4	3.59	0.835	0.691	1.500	0.072	0.450	20.5	6.3	E
283612	D 6	21.1	17.0	38.1	2.03	12.7	5.74	0.831	0.671	1.500	0.080	0.500	32.7	6.3	F
283712	D 6	21.4	16.7	38.1	2.34	15.2	9.48	0.843	0.659	1.500	0.092	0.598	54.2	6.5	F
283812	D 6	20.9	15.6	38.1	2.64	17.8	16.71	0.823	0.615	1.500	0.104	0.702	95.4	6.8	G
283912	D 6	21.2	15.3	38.1	2.95	19.9	25.84	0.835	0.603	1.500	0.116	0.783	147.6	6.8	H
284012	D 6	20.7	14.2	38.1	3.25	22.8	41.68	0.815	0.559	1.500	0.128	0.896	238.0	7.0	J
304112	D 6	21.9	14.6	38.1	3.66	24.7	61.55	0.862	0.574	1.500	0.144	0.972	351.5	6.8	K
283514	D 6	21.2	17.5	44.5	1.83	12.8	3.05	0.835	0.691	1.750	0.072	0.504	17.4	7.0	F
283614	D 6	21.1	17.0	44.5	2.03	14.2	4.88	0.831	0.671	1.750	0.080	0.560	27.8	7.0	F
283714	D 6	21.4	16.7	44.5	2.34	16.9	8.13	0.843	0.659	1.750	0.092	0.667	46.4	7.3	G
283814	D 6	20.9	15.6	44.5	2.64	20.5	13.80	0.823	0.615	1.750	0.104	0.806	78.8	7.8	H
283914	D 6	21.2	15.3	44.5	2.95	22.8	21.35	0.835	0.603	1.750	0.116	0.899	121.9	7.8	H
284014	D 6	20.7	14.2	44.5	3.25	26.0	34.74	0.815	0.559	1.750	0.128	1.024	198.3	8.0	J
304114	D 6	21.9	14.6	44.5	3.66	28.3	50.85	0.862	0.574	1.750	0.144	1.116	290.3	7.8	K
283516	D 6	21.2	17.5	50.8	1.83	13.7	2.77	0.835	0.691	2.000	0.072	0.540	15.8	7.5	F
283616	D 6	21.1	17.0	50.8	2.03	15.7	4.24	0.831	0.671	2.000	0.080	0.620	24.2	7.8	F
283716	D 6	21.4	16.7	50.8	2.34	19.3	6.83	0.843	0.659	2.000	0.092	0.759	39.0	8.3	G
283816	D 6	20.9	15.6	50.8	2.64	23.1	11.76	0.823	0.615	2.000	0.104	0.910	67.1	8.8	H
283916	D 6	21.2	15.3	50.8	2.95	25.8	18.19	0.835	0.603	2.000	0.116	1.015	103.8	8.8	J
284016	D 6	20.7	14.2	50.8	3.25	29.3	29.77	0.815	0.559	2.000	0.128	1.152	170.0	9.0	K
304116	D 6	21.9	14.6	50.8	3.66	31.1	44.98	0.862	0.574	2.000	0.144	1.224	256.8	8.5	L
283520	D 6	21.2	17.5	63.5	1.83	16.5	2.18	0.835	0.691	2.500	0.072	0.648	12.4	9.0	F
283620	D 6	21.1	17.0	63.5	2.03	18.8	3.36	0.831	0.671	2.500	0.080	0.740	19.2	9.3	F
283720	D 6	21.4	16.7	63.5	2.34	22.8	5.51	0.843	0.659	2.500	0.092	0.897	31.4	9.8	G
283820	D 6	20.9	15.6	63.5	2.64	27.7	9.34	0.823	0.615	2.500	0.104	1.092	53.3	10.5	H
283920	D 6	21.2	15.3	63.5	2.95	30.9	14.44	0.835	0.603	2.500	0.116	1.218	82.5	10.5	J
284020	D 6	20.7	14.2	63.5	3.25	34.9	23.82	0.815	0.559	2.500	0.128	1.376	136.0	10.8	K
304120	D 6	21.9	14.6	63.5	3.66	37.5	35.44	0.862	0.574	2.500	0.144	1.476	202.4	10.3	M
283524	D 6	21.2	17.5	76.2	1.83	19.2	1.80	0.835	0.691	3.000	0.072	0.756	10.3	10.5	F
283624	D 6	21.1	17.0	76.2	2.03	21.8	2.79	0.831	0.671	3.000	0.080	0.860	15.9	10.8	G
283724	D 6	21.4	16.7	76.2	2.34	26.3	4.61	0.843	0.659	3.000	0.092	1.035	26.3	11.3	H
283824	D 6	20.9	15.6	76.2	2.64	31.7	7.94	0.823	0.615	3.000	0.104	1.248	45.3	12.0	J
283924	D 6	21.2	15.3	76.2	2.95	36.1	11.98	0.835	0.603	3.000	0.116	1.421	68.4	12.3	K
284024	D 6	20.7	14.2	76.2	3.25	40.6	19.85	0.815	0.559	3.000	0.128	1.600	113.3	12.5	L
304124	D 6	21.9	14.6	76.2	3.66	43.9	29.24	0.862	0.574	3.000	0.144	1.728	166.9	12.0	M
283528	D 6	21.2	17.5	88.9	1.83	21.9	1.53	0.835	0.691	3.500	0.072	0.864	8.7	12.0	G
283628	D 6	21.1	17.0	88.9	2.03	24.9	2.38	0.831	0.671	3.500	0.080	0.980	13.6	12.3	G
283728	D 6	21.4	16.7	88.9	2.34	30.4	3.88	0.843	0.659	3.500	0.092	1.196	22.2	13.0	H
283828	D 6	20.9	15.6	88.9	2.64	37.0	6.61	0.823	0.615	3.500	0.104	1.456	37.8	14.0	J
283928	D 6	21.2	15.3	88.9	2.95	41.2	10.23	0.835	0.603	3.500	0.116	1.624	58.4	14.0	K
284028	D 6	20.7	14.2	88.9	3.25	47.1	16.67	0.815	0.559	3.500	0.128	1.856	95.2	14.5	L
304128	D 6	21.9	14.6	88.9	3.66	50.3	24.88	0.862	0.574	3.500	0.144	1.980	142.1	13.8	N
283532	D 6	21.2	17.5	101.6	1.83	24.2	1.36	0.835	0.691	4.000	0.072	0.954	7.7	13.3	G
283632	D 6	21.1	17.0	101.6	2.03	27.9	2.07	0.831	0.671	4.000	0.080	1.100	11.8	13.8	H

Choose from millions of sizes - www.flexosprings.com

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No. of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	Lbs/in	approx	
283732	D 6	21.4	16.7	101.6	2.34	33.9	3.41	0.843	0.659	4.000	0.092	1.334	19.5	14.5	J
283832	D 6	20.9	15.6	101.6	2.64	41.6	5.77	0.823	0.615	4.000	0.104	1.638	33.0	15.8	K
283932	D 6	21.2	15.3	101.6	2.95	46.4	8.93	0.835	0.603	4.000	0.116	1.827	51.0	15.8	L
284032	D 6	20.7	14.2	101.6	3.25	52.8	14.63	0.815	0.559	4.000	0.128	2.080	83.5	16.3	M
304132	D 6	21.9	14.6	101.6	3.66	56.7	21.66	0.862	0.574	4.000	0.144	2.232	123.7	15.5	P
283540	D 6	21.2	17.5	127.0	1.83	29.7	1.07	0.835	0.691	5.000	0.072	1.170	6.1	16.3	H
283640	D 6	21.1	17.0	127.0	2.03	34.5	1.63	0.831	0.671	5.000	0.080	1.360	9.3	17.0	J
283740	D 6	21.4	16.7	127.0	2.34	41.5	2.71	0.843	0.659	5.000	0.092	1.633	15.5	17.8	K
283840	D 6	20.9	15.6	127.0	2.64	50.2	4.67	0.823	0.615	5.000	0.104	1.976	26.7	19.0	L
283940	D 6	21.2	15.3	127.0	2.95	56.7	7.12	0.835	0.603	5.000	0.116	2.233	40.6	19.3	M
284040	D 6	20.7	14.2	127.0	3.25	64.2	11.74	0.815	0.559	5.000	0.128	2.528	67.0	19.8	N
304140	D 6	21.9	14.6	127.0	3.66	69.5	17.20	0.862	0.574	5.000	0.144	2.736	98.2	19.0	Q
283548	D 6	21.2	17.5	152.4	1.83	34.8	0.90	0.835	0.691	6.000	0.072	1.368	5.1	19.0	J
283648	D 6	21.1	17.0	152.4	2.03	40.6	1.35	0.831	0.671	6.000	0.080	1.600	7.7	20.0	K
283748	D 6	21.4	16.7	152.4	2.34	49.1	2.25	0.843	0.659	6.000	0.092	1.932	12.8	21.0	L
283848	D 6	20.9	15.6	152.4	2.64	59.4	3.87	0.823	0.615	6.000	0.104	2.340	22.1	22.5	M
283948	D 6	21.2	15.3	152.4	2.95	67.0	5.92	0.835	0.603	6.000	0.116	2.639	33.8	22.8	N
284048	D 6	20.7	14.2	152.4	3.25	76.4	9.69	0.815	0.559	6.000	0.128	3.008	55.4	23.5	P
304148	D 6	21.9	14.6	152.4	3.66	82.3	14.26	0.862	0.574	6.000	0.144	3.240	81.4	22.5	Q
303608	D 7	22.6	18.5	25.4	2.03	9.7	7.06	0.890	0.730	1.000	0.080	0.380	40.3	4.8	E
303708	D 7	23.0	18.3	25.4	2.34	11.1	12.19	0.906	0.721	1.000	0.092	0.437	69.6	4.8	F
303808	D 7	22.5	17.2	25.4	2.64	12.5	22.43	0.886	0.678	1.000	0.104	0.494	128.1	4.8	G
303908	D 7	22.8	16.9	25.4	2.95	14.0	34.69	0.898	0.666	1.000	0.116	0.551	198.1	4.8	G
304008	D 7	22.3	15.8	25.4	3.25	16.3	53.40	0.878	0.622	1.000	0.128	0.640	304.9	5.0	H
324108	D 7	23.5	16.2	25.4	3.66	17.4	82.62	0.925	0.637	1.000	0.144	0.684	471.7	4.8	J
303610	D 7	22.6	18.5	31.8	2.03	10.7	5.98	0.890	0.730	1.250	0.080	0.420	34.1	5.3	E
303710	D 7	23.0	18.3	31.8	2.34	12.9	9.58	0.906	0.721	1.250	0.092	0.506	54.7	5.5	F
303810	D 7	22.5	17.2	31.8	2.64	15.2	16.45	0.886	0.678	1.250	0.104	0.598	93.9	5.8	G
303910	D 7	22.8	16.9	31.8	2.95	16.9	25.44	0.898	0.666	1.250	0.116	0.667	145.3	5.8	H
304010	D 7	22.3	15.8	31.8	3.25	18.7	42.72	0.878	0.622	1.250	0.128	0.736	243.9	5.8	J
324110	D 7	23.5	16.2	31.8	3.66	21.0	60.59	0.925	0.637	1.250	0.144	0.828	345.9	5.8	J
303612	D 7	22.6	18.5	38.1	2.03	12.2	4.86	0.890	0.730	1.500	0.080	0.480	27.7	6.0	F
303712	D 7	23.0	18.3	38.1	2.34	14.6	7.89	0.906	0.721	1.500	0.092	0.575	45.0	6.3	F
303812	D 7	22.5	17.2	38.1	2.64	17.2	13.71	0.886	0.678	1.500	0.104	0.676	78.3	6.5	G
303912	D 7	22.8	16.9	38.1	2.95	19.1	21.20	0.898	0.666	1.500	0.116	0.754	121.1	6.5	H
304012	D 7	22.3	15.8	38.1	3.25	21.9	33.72	0.878	0.622	1.500	0.128	0.864	192.6	6.8	J
324112	D 7	23.5	16.2	38.1	3.66	23.8	50.49	0.925	0.637	1.500	0.144	0.936	288.3	6.5	K
303614	D 7	22.6	18.5	44.5	2.03	13.7	4.09	0.890	0.730	1.750	0.080	0.540	23.3	6.8	F
303714	D 7	23.0	18.3	44.5	2.34	16.4	6.70	0.906	0.721	1.750	0.092	0.644	38.3	7.0	G
303814	D 7	22.5	17.2	44.5	2.64	19.2	11.75	0.886	0.678	1.750	0.104	0.754	67.1	7.3	H
303914	D 7	22.8	16.9	44.5	2.95	21.4	18.17	0.898	0.666	1.750	0.116	0.841	103.8	7.3	H
304014	D 7	22.3	15.8	44.5	3.25	24.4	29.13	0.878	0.622	1.750	0.128	0.960	166.3	7.5	J
324114	D 7	23.5	16.2	44.5	3.66	26.5	43.28	0.925	0.637	1.750	0.144	1.044	247.1	7.3	K
M446710	D 7	22.0	17.5	50.0	2.24	19.6	4.79	0.866	0.690	1.969	0.088	0.772	27.4	8.8	G
M446910	D 7	22.0	17.0	50.0	2.50	22.5	7.46	0.866	0.669	1.969	0.098	0.886	42.6	9.0	G
M447110	D 7	22.0	16.4	50.0	2.80	25.9	11.87	0.866	0.646	1.969	0.110	1.020	67.8	9.3	H
M447210	D 7	22.0	16.0	50.0	3.00	28.5	15.61	0.866	0.630	1.969	0.118	1.122	89.1	9.5	J
303616	D 7	22.6	18.5	50.8	2.03	15.2	3.53	0.890	0.730	2.000	0.080	0.600	20.2	7.5	F
303716	D 7	23.0	18.3	50.8	2.34	18.1	5.83	0.906	0.721	2.000	0.092	0.713	33.3	7.8	G
303816	D 7	22.5	17.2	50.8	2.64	21.1	10.28	0.886	0.678	2.000	0.104	0.832	58.7	8.0	H
303916	D 7	22.8	16.9	50.8	2.95	24.3	15.26	0.898	0.666	2.000	0.116	0.957	87.2	8.3	J

For Sales or Assistance - Tel 0117 967 3313

All characteristics are nominal

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia. mm	Inside Dia. mm	Free Lth. mm	Wire Size mm	Solid Lth. mm	Rate N/mm	Outside Dia. Inches	Inside Dia. Inches	Free Lth. Inches	Wire Size Inches	Solid Lth. Inches	Rate lbs/in		
304016	D 7	22.3	15.8	50.8	3.25	26.8	25.63	0.878	0.622	2.000	0.128	1.056	146.3	8.3	K
324116	D 7	23.5	16.2	50.8	3.66	29.3	37.87	0.925	0.637	2.000	0.144	1.152	216.2	8.0	L
M446712	D 7	22.0	17.5	60.0	2.24	23.0	3.92	0.866	0.690	2.362	0.088	0.904	22.4	10.3	G
M446912	D 7	22.0	17.0	60.0	2.50	26.3	6.14	0.866	0.669	2.362	0.098	1.033	35.1	10.5	H
M447112	D 7	22.0	16.4	60.0	2.80	30.8	9.56	0.866	0.646	2.362	0.110	1.213	54.6	11.0	J
M447212	D 7	22.0	16.0	60.0	3.00	33.8	12.66	0.866	0.630	2.362	0.118	1.329	72.3	11.3	K
303620	D 7	22.6	18.5	63.5	2.03	18.3	2.77	0.890	0.730	2.500	0.080	0.720	15.8	9.0	F
303720	D 7	23.0	18.3	63.5	2.34	21.6	4.62	0.906	0.721	2.500	0.092	0.851	26.4	9.3	G
303820	D 7	22.5	17.2	63.5	2.64	25.8	7.96	0.886	0.678	2.500	0.104	1.014	45.4	9.8	H
303920	D 7	22.8	16.9	63.5	2.95	28.7	12.31	0.898	0.666	2.500	0.116	1.131	70.3	9.8	J
304020	D 7	22.3	15.8	63.5	3.25	32.5	20.02	0.878	0.622	2.500	0.128	1.280	114.3	10.0	K
324120	D 7	23.5	16.2	63.5	3.66	35.7	29.32	0.925	0.637	2.500	0.144	1.404	167.4	9.8	M
M446714	D 7	22.0	17.5	70.0	2.24	25.8	3.40	0.866	0.690	2.756	0.088	1.014	19.4	11.5	H
M446914	D 7	22.0	17.0	70.0	2.50	30.6	5.09	0.866	0.669	2.756	0.098	1.206	29.1	12.3	H
M447114	D 7	22.0	16.4	70.0	2.80	35.7	8.01	0.866	0.646	2.756	0.110	1.406	45.7	12.8	J
M447214	D 7	22.0	16.0	70.0	3.00	38.3	10.89	0.866	0.630	2.756	0.118	1.506	62.2	12.8	K
303624	D 7	22.6	18.5	76.2	2.03	20.8	2.35	0.890	0.730	3.000	0.080	0.820	13.4	10.3	G
303724	D 7	23.0	18.3	76.2	2.34	25.1	3.83	0.906	0.721	3.000	0.092	0.989	21.9	10.8	H
303824	D 7	22.5	17.2	76.2	2.64	29.7	6.67	0.886	0.678	3.000	0.104	1.170	38.1	11.3	J
303924	D 7	22.8	16.9	76.2	2.95	33.1	10.31	0.898	0.666	3.000	0.116	1.305	58.9	11.3	K
304024	D 7	22.3	15.8	76.2	3.25	38.2	16.43	0.878	0.622	3.000	0.128	1.504	93.8	11.8	L
324124	D 7	23.5	16.2	76.2	3.66	41.2	24.56	0.925	0.637	3.000	0.144	1.620	140.2	11.3	M
M446716	D 7	22.0	17.5	80.0	2.24	29.1	2.94	0.866	0.690	3.150	0.088	1.146	16.8	13.0	H
M446916	D 7	22.0	17.0	80.0	2.50	34.4	4.44	0.866	0.669	3.150	0.098	1.353	25.4	13.8	J
M447116	D 7	22.0	16.4	80.0	2.80	39.9	7.03	0.866	0.646	3.150	0.110	1.571	40.1	14.3	K
M447216	D 7	22.0	16.0	80.0	3.00	43.5	9.36	0.866	0.630	3.150	0.118	1.713	53.5	14.5	K
303628	D 7	22.6	18.5	88.9	2.03	23.9	1.99	0.890	0.730	3.500	0.080	0.940	11.4	11.8	G
303728	D 7	23.0	18.3	88.9	2.34	28.6	3.27	0.906	0.721	3.500	0.092	1.127	18.7	12.3	H
303828	D 7	22.5	17.2	88.9	2.64	33.7	5.74	0.886	0.678	3.500	0.104	1.326	32.8	12.8	J
303928	D 7	22.8	16.9	88.9	2.95	38.3	8.67	0.898	0.666	3.500	0.116	1.508	49.5	13.0	K
304028	D 7	22.3	15.8	88.9	3.25	43.9	13.93	0.878	0.622	3.500	0.128	1.728	79.5	13.5	L
324128	D 7	23.5	16.2	88.9	3.66	47.6	20.65	0.925	0.637	3.500	0.144	1.872	117.9	13.0	N
M446720	D 7	22.0	17.5	100.0	2.24	35.8	2.31	0.866	0.690	3.937	0.088	1.411	13.2	16.0	J
M446920	D 7	22.0	17.0	100.0	2.50	42.5	3.48	0.866	0.669	3.937	0.098	1.673	19.9	17.0	K
M447120	D 7	22.0	16.4	100.0	2.80	49.7	5.47	0.866	0.646	3.937	0.110	1.957	31.2	17.8	L
M447220	D 7	22.0	16.0	100.0	3.00	54.0	7.32	0.866	0.630	3.937	0.118	2.126	41.8	18.0	M
303632	D 7	22.6	18.5	101.6	2.03	26.9	1.73	0.890	0.730	4.000	0.080	1.060	9.9	13.3	H
303732	D 7	23.0	18.3	101.6	2.34	32.1	2.85	0.906	0.721	4.000	0.092	1.265	16.3	13.8	J
303832	D 7	22.5	17.2	101.6	2.64	38.3	4.93	0.886	0.678	4.000	0.104	1.508	28.2	14.5	K
303932	D 7	22.8	16.9	101.6	2.95	42.7	7.63	0.898	0.666	4.000	0.116	1.682	43.6	14.5	L
304032	D 7	22.3	15.8	101.6	3.25	48.8	12.32	0.878	0.622	4.000	0.128	1.920	70.4	15.0	M
324132	D 7	23.5	16.2	101.6	3.66	53.0	18.18	0.925	0.637	4.000	0.144	2.088	103.8	14.5	P
M446724	D 7	22.0	17.5	120.0	2.24	42.6	1.90	0.866	0.690	4.724	0.088	1.676	10.9	19.0	J
M446924	D 7	22.0	17.0	120.0	2.50	50.6	2.86	0.866	0.669	4.724	0.098	1.993	16.3	20.3	K
M447124	D 7	22.0	16.4	120.0	2.80	58.8	4.53	0.866	0.646	4.724	0.110	2.315	25.9	21.0	L
M447224	D 7	22.0	16.0	120.0	3.00	64.5	6.00	0.866	0.630	4.724	0.118	2.539	34.3	21.5	M
303640	D 7	22.6	18.5	127.0	2.03	32.5	1.39	0.890	0.730	5.000	0.080	1.280	7.9	16.0	J
303740	D 7	23.0	18.3	127.0	2.34	38.6	2.31	0.906	0.721	5.000	0.092	1.518	13.2	16.5	K
303840	D 7	22.5	17.2	127.0	2.64	46.2	3.98	0.886	0.678	5.000	0.104	1.820	22.7	17.5	L
303940	D 7	22.8	16.9	127.0	2.95	52.3	6.06	0.898	0.666	5.000	0.116	2.059	34.6	17.8	M
304040	D 7	22.3	15.8	127.0	3.25	60.1	9.71	0.878	0.622	5.000	0.128	2.368	55.4	18.5	N

Choose from millions of sizes - www.flexosprings.com

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	Lbs/in	approx	
324140	D 7	23.5	16.2	127.0	3.66	64.9	14.43	0.925	0.637	5.000	0.144	2.556	82.4	17.8	Q
M446728	D 7	22.0	17.5	140.0	2.24	49.3	1.62	0.866	0.690	5.512	0.088	1.940	9.2	22.0	K
M446928	D 7	22.0	17.0	140.0	2.50	58.8	2.43	0.866	0.669	5.512	0.098	2.313	13.9	23.5	L
M447128	D 7	22.0	16.4	140.0	2.80	68.6	3.83	0.866	0.646	5.512	0.110	2.701	21.8	24.5	M
M447228	D 7	22.0	16.0	140.0	3.00	75.0	5.09	0.866	0.630	5.512	0.118	2.953	29.1	25.0	N
303648	D 7	22.6	18.5	152.4	2.03	38.1	1.16	0.890	0.730	6.000	0.080	1.500	6.6	18.8	K
303748	D 7	23.0	18.3	152.4	2.34	45.6	1.92	0.906	0.721	6.000	0.092	1.794	10.9	19.5	L
303848	D 7	22.5	17.2	152.4	2.64	54.8	3.29	0.886	0.678	6.000	0.104	2.158	18.8	20.8	M
303948	D 7	22.8	16.9	152.4	2.95	61.9	5.02	0.898	0.666	6.000	0.116	2.436	28.7	21.0	N
304048	D 7	22.3	15.8	152.4	3.25	70.7	8.11	0.878	0.622	6.000	0.128	2.784	46.3	21.8	P
324148	D 7	23.5	16.2	152.4	3.66	76.8	11.96	0.925	0.637	6.000	0.144	3.024	68.3	21.0	Q
M446732	D 7	22.0	17.5	160.0	2.24	56.0	1.41	0.866	0.690	6.299	0.088	2.205	8.0	25.0	L
M446932	D 7	22.0	17.0	160.0	2.50	66.9	2.11	0.866	0.669	6.299	0.098	2.633	12.0	26.8	M
M447132	D 7	22.0	16.4	160.0	2.80	77.7	3.34	0.866	0.646	6.299	0.110	3.059	19.1	27.8	N
M447232	D 7	22.0	16.0	160.0	3.00	85.5	4.42	0.866	0.630	6.299	0.118	3.366	25.2	28.5	P
323608	D 8	24.2	20.1	25.4	2.03	8.6	6.89	0.953	0.793	1.000	0.080	0.340	39.4	4.3	E
323708	D 8	24.5	19.8	25.4	2.34	10.5	10.86	0.965	0.781	1.000	0.092	0.414	62.0	4.5	F
323808	D 8	24.0	18.7	25.4	2.64	12.5	18.03	0.945	0.737	1.000	0.104	0.494	102.9	4.8	G
323908	D 8	24.4	18.5	25.4	2.95	14.0	27.50	0.961	0.729	1.000	0.116	0.551	157.0	4.8	G
324008	D 8	23.9	17.4	25.4	3.25	15.4	45.73	0.941	0.685	1.000	0.128	0.608	261.1	4.8	H
344108	D 8	25.1	17.8	25.4	3.66	17.4	65.47	0.988	0.700	1.000	0.144	0.684	373.8	4.8	J
344208	D 8	24.7	16.6	25.4	4.06	19.3	111.89	0.972	0.652	1.000	0.160	0.760	638.9	4.8	K
323610	D 8	24.2	20.1	31.8	2.03	10.2	5.17	0.953	0.793	1.250	0.080	0.400	29.5	5.0	E
323710	D 8	24.5	19.8	31.8	2.34	12.3	8.36	0.965	0.781	1.250	0.092	0.483	47.7	5.3	F
323810	D 8	24.0	18.7	31.8	2.64	14.5	14.16	0.945	0.737	1.250	0.104	0.572	80.9	5.5	G
323910	D 8	24.4	18.5	31.8	2.95	16.2	21.60	0.961	0.729	1.250	0.116	0.638	123.4	5.5	H
324010	D 8	23.9	17.4	31.8	3.25	17.9	35.93	0.941	0.685	1.250	0.128	0.704	205.2	5.5	J
344110	D 8	25.1	17.8	31.8	3.66	20.1	51.44	0.988	0.700	1.250	0.144	0.792	293.7	5.5	K
344210	D 8	24.7	16.6	31.8	4.06	22.4	87.91	0.972	0.652	1.250	0.160	0.880	502.0	5.5	L
323612	D 8	24.2	20.1	38.1	2.03	11.7	4.14	0.953	0.793	1.500	0.080	0.460	23.6	5.8	F
323712	D 8	24.5	19.8	38.1	2.34	13.4	7.24	0.965	0.781	1.500	0.092	0.529	41.4	5.8	F
323812	D 8	24.0	18.7	38.1	2.64	15.9	12.39	0.945	0.737	1.500	0.104	0.624	70.8	6.0	G
323912	D 8	24.4	18.5	38.1	2.95	18.4	17.79	0.961	0.729	1.500	0.116	0.725	101.6	6.3	H
324012	D 8	23.9	17.4	38.1	3.25	20.3	29.59	0.941	0.685	1.500	0.128	0.800	169.0	6.3	J
344112	D 8	25.1	17.8	38.1	3.66	22.9	42.36	0.988	0.700	1.500	0.144	0.900	241.9	6.3	K
344212	D 8	24.7	16.6	38.1	4.06	25.4	72.40	0.972	0.652	1.500	0.160	1.000	413.4	6.3	L
323614	D 8	24.2	20.1	44.5	2.03	12.7	3.65	0.953	0.793	1.750	0.080	0.500	20.8	6.3	F
323714	D 8	24.5	19.8	44.5	2.34	15.2	6.04	0.965	0.781	1.750	0.092	0.598	34.5	6.5	G
323814	D 8	24.0	18.7	44.5	2.64	17.8	10.44	0.945	0.737	1.750	0.104	0.702	59.6	6.8	H
323914	D 8	24.4	18.5	44.5	2.95	20.6	15.12	0.961	0.729	1.750	0.116	0.812	86.3	7.0	H
324014	D 8	23.9	17.4	44.5	3.25	22.8	25.15	0.941	0.685	1.750	0.128	0.896	143.6	7.0	J
344114	D 8	25.1	17.8	44.5	3.66	25.6	36.01	0.988	0.700	1.750	0.144	1.008	205.6	7.0	L
344214	D 8	24.7	16.6	44.5	4.06	28.4	61.54	0.972	0.652	1.750	0.160	1.120	351.4	7.0	M
M486910	D 8	24.0	19.0	50.0	2.50	20.6	6.23	0.945	0.748	1.969	0.098	0.812	35.6	8.3	G
M487110	D 8	24.0	18.4	50.0	2.80	23.8	9.84	0.945	0.724	1.969	0.110	0.937	56.2	8.5	H
M487210	D 8	24.0	18.0	50.0	3.00	26.3	12.84	0.945	0.709	1.969	0.118	1.033	73.3	8.8	J
M487410	D 8	24.0	17.3	50.0	3.35	29.3	21.00	0.945	0.681	1.969	0.132	1.154	119.9	8.8	K
323616	D 8	24.2	20.1	50.8	2.03	14.2	3.10	0.953	0.793	2.000	0.080	0.560	17.7	7.0	F
323716	D 8	24.5	19.8	50.8	2.34	16.9	5.17	0.965	0.781	2.000	0.092	0.667	29.5	7.3	G
323816	D 8	24.0	18.7	50.8	2.64	19.8	9.01	0.945	0.737	2.000	0.104	0.780	51.5	7.5	H
323916	D 8	24.4	18.5	50.8	2.95	22.8	13.15	0.961	0.729	2.000	0.116	0.899	75.1	7.8	J

For Sales or Assistance - Tel 0117 967 3313

All characteristics are nominal

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	Lbs/in	approx	
324016	D 8	23.9	17.4	50.8	3.25	25.2	21.87	0.941	0.685	2.000	0.128	0.992	124.9	7.8	K
344116	D 8	25.1	17.8	50.8	3.66	28.3	31.31	0.988	0.700	2.000	0.144	1.116	178.8	7.8	L
344216	D 8	24.7	16.6	50.8	4.06	32.5	51.28	0.972	0.652	2.000	0.160	1.280	292.8	8.0	M
M486912	D 8	24.0	19.0	60.0	2.50	23.8	5.19	0.945	0.748	2.362	0.098	0.935	29.7	9.5	H
M487112	D 8	24.0	18.4	60.0	2.80	28.0	7.99	0.945	0.724	2.362	0.110	1.102	45.6	10.0	J
M487212	D 8	24.0	18.0	60.0	3.00	30.8	10.51	0.945	0.709	2.362	0.118	1.211	60.0	10.3	K
M487412	D 8	24.0	17.3	60.0	3.35	35.2	16.68	0.945	0.681	2.362	0.132	1.385	95.2	10.5	L
323620	D 8	24.2	20.1	63.5	2.03	16.8	2.48	0.953	0.793	2.500	0.080	0.660	14.2	8.3	F
323720	D 8	24.5	19.8	63.5	2.34	20.4	4.02	0.965	0.781	2.500	0.092	0.805	23.0	8.8	G
323820	D 8	24.0	18.7	63.5	2.64	23.8	7.08	0.945	0.737	2.500	0.104	0.936	40.4	9.0	H
323920	D 8	24.4	18.5	63.5	2.95	27.3	10.43	0.961	0.729	2.500	0.116	1.073	59.6	9.3	J
324020	D 8	23.9	17.4	63.5	3.25	30.1	17.35	0.941	0.685	2.500	0.128	1.184	99.0	9.3	K
344120	D 8	25.1	17.8	63.5	3.66	33.8	24.83	0.988	0.700	2.500	0.144	1.332	141.8	9.3	M
344220	D 8	24.7	16.6	63.5	4.06	38.6	41.03	0.972	0.652	2.500	0.160	1.520	234.3	9.5	N
M486914	D 8	24.0	19.0	70.0	2.50	27.5	4.33	0.945	0.748	2.756	0.098	1.083	24.7	11.0	H
M487114	D 8	24.0	18.4	70.0	2.80	32.2	6.73	0.945	0.724	2.756	0.110	1.268	38.4	11.5	J
M487214	D 8	24.0	18.0	70.0	3.00	35.3	8.89	0.945	0.709	2.756	0.118	1.388	50.8	11.8	K
M487414	D 8	24.0	17.3	70.0	3.35	40.2	14.18	0.945	0.681	2.756	0.132	1.583	81.0	12.0	L
323624	D 8	24.2	20.1	76.2	2.03	19.3	2.07	0.953	0.793	3.000	0.080	0.760	11.8	9.5	G
323724	D 8	24.5	19.8	76.2	2.34	23.4	3.40	0.965	0.781	3.000	0.092	0.920	19.4	10.0	H
323824	D 8	24.0	18.7	76.2	2.64	27.7	5.83	0.945	0.737	3.000	0.104	1.092	33.3	10.5	J
323924	D 8	24.4	18.5	76.2	2.95	31.7	8.64	0.961	0.729	3.000	0.116	1.247	49.3	10.8	K
324024	D 8	23.9	17.4	76.2	3.25	35.8	13.97	0.941	0.685	3.000	0.128	1.408	79.8	11.0	L
344124	D 8	25.1	17.8	76.2	3.66	39.3	20.58	0.988	0.700	3.000	0.144	1.548	117.5	10.8	M
344224	D 8	24.7	16.6	76.2	4.06	44.7	34.19	0.972	0.652	3.000	0.160	1.760	195.2	11.0	N
M486916	D 8	24.0	19.0	80.0	2.50	30.6	3.80	0.945	0.748	3.150	0.098	1.206	21.7	12.3	J
M487116	D 8	24.0	18.4	80.0	2.80	36.4	5.81	0.945	0.724	3.150	0.110	1.433	33.2	13.0	K
M487216	D 8	24.0	18.0	80.0	3.00	39.8	7.71	0.945	0.709	3.150	0.118	1.565	44.0	13.3	K
M487416	D 8	24.0	17.3	80.0	3.35	46.1	12.07	0.945	0.681	3.150	0.132	1.813	68.9	13.8	M
323628	D 8	24.2	20.1	88.9	2.03	21.8	1.77	0.953	0.793	3.500	0.080	0.860	10.1	10.8	G
323728	D 8	24.5	19.8	88.9	2.34	26.3	2.94	0.965	0.781	3.500	0.092	1.035	16.8	11.3	H
323828	D 8	24.0	18.7	88.9	2.64	31.7	4.96	0.945	0.737	3.500	0.104	1.248	28.3	12.0	J
323928	D 8	24.4	18.5	88.9	2.95	36.8	7.20	0.961	0.729	3.500	0.116	1.450	41.1	12.5	K
324028	D 8	23.9	17.4	88.9	3.25	40.6	11.98	0.941	0.685	3.500	0.128	1.600	68.4	12.5	L
344128	D 8	25.1	17.8	88.9	3.66	44.8	17.56	0.988	0.700	3.500	0.144	1.764	100.3	12.3	N
344228	D 8	24.7	16.6	88.9	4.06	50.8	29.30	0.972	0.652	3.500	0.160	2.000	167.3	12.5	P
M486920	D 8	24.0	19.0	100.0	2.50	38.1	2.94	0.945	0.748	3.937	0.098	1.501	16.8	15.3	K
M487120	D 8	24.0	18.4	100.0	2.80	44.8	4.57	0.945	0.724	3.937	0.110	1.764	26.1	16.0	L
M487220	D 8	24.0	18.0	100.0	3.00	49.5	5.98	0.945	0.709	3.937	0.118	1.949	34.1	16.5	M
M487420	D 8	24.0	17.3	100.0	3.35	56.1	9.61	0.945	0.681	3.937	0.132	2.209	54.9	16.8	N
323632	D 8	24.2	20.1	101.6	2.03	24.4	1.55	0.953	0.793	4.000	0.080	0.960	8.9	12.0	H
323732	D 8	24.5	19.8	101.6	2.34	29.2	2.59	0.965	0.781	4.000	0.092	1.150	14.8	12.5	J
323832	D 8	24.0	18.7	101.6	2.64	35.7	4.31	0.945	0.737	4.000	0.104	1.404	24.6	13.5	K
323932	D 8	24.4	18.5	101.6	2.95	41.2	6.30	0.961	0.729	4.000	0.116	1.624	36.0	14.0	L
324032	D 8	23.9	17.4	101.6	3.25	45.5	10.48	0.941	0.685	4.000	0.128	1.792	59.8	14.0	M
344132	D 8	25.1	17.8	101.6	3.66	50.3	15.32	0.988	0.700	4.000	0.144	1.980	87.5	13.8	P
344232	D 8	24.7	16.6	101.6	4.06	57.9	25.12	0.972	0.652	4.000	0.160	2.280	143.4	14.3	Q
M486924	D 8	24.0	19.0	120.0	2.50	45.0	2.44	0.945	0.748	4.724	0.098	1.772	13.9	18.0	K
M487124	D 8	24.0	18.4	120.0	2.80	53.2	3.76	0.945	0.724	4.724	0.110	2.094	21.5	19.0	L
M487224	D 8	24.0	18.0	120.0	3.00	58.5	4.95	0.945	0.709	4.724	0.118	2.303	28.3	19.5	M
M487424	D 8	24.0	17.3	120.0	3.35	67.0	7.88	0.945	0.681	4.724	0.132	2.638	45.0	20.0	N

Choose from millions of sizes - www.flexosprings.com

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Cells	PRICE RANGE
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	Lbs/in.	approx	
323640	D 8	24.2	20.1	127.0	2.03	29.5	1.24	0.953	0.793	5.000	0.080	1.160	7.1	14.5	J
323740	D 8	24.5	19.8	127.0	2.34	35.6	2.05	0.965	0.781	5.000	0.092	1.403	11.7	15.3	K
323840	D 8	24.0	18.7	127.0	2.64	43.6	3.42	0.945	0.737	5.000	0.104	1.716	19.5	16.5	L
323940	D 8	24.4	18.5	127.0	2.95	50.1	5.04	0.961	0.729	5.000	0.116	1.972	28.8	17.0	M
324040	D 8	23.9	17.4	127.0	3.25	55.3	8.38	0.941	0.685	5.000	0.128	2.176	47.9	17.0	N
344140	D 8	25.1	17.8	127.0	3.66	61.3	12.21	0.988	0.700	5.000	0.144	2.412	69.7	16.8	Q
344240	D 8	24.7	16.6	127.0	4.06	70.1	20.18	0.972	0.652	5.000	0.160	2.760	115.2	17.3	R
M486928	D 8	24.0	19.0	140.0	2.50	51.9	2.08	0.945	0.748	5.512	0.098	2.042	11.9	20.8	L
M487128	D 8	24.0	18.4	140.0	2.80	61.6	3.20	0.945	0.724	5.512	0.110	2.425	18.3	22.0	M
M487228	D 8	24.0	18.0	140.0	3.00	68.3	4.18	0.945	0.709	5.512	0.118	2.687	23.9	22.8	N
M487428	D 8	24.0	17.3	140.0	3.35	77.9	6.67	0.945	0.681	5.512	0.132	3.066	38.1	23.3	P
323648	D 8	24.2	20.1	152.4	2.03	35.1	1.02	0.953	0.793	6.000	0.080	1.380	5.8	17.3	K
323748	D 8	24.5	19.8	152.4	2.34	42.1	1.70	0.965	0.781	6.000	0.092	1.656	9.7	18.0	L
323848	D 8	24.0	18.7	152.4	2.64	50.9	2.87	0.945	0.737	6.000	0.104	2.002	16.4	19.3	M
323948	D 8	24.4	18.5	152.4	2.95	58.9	4.20	0.961	0.729	6.000	0.116	2.320	24.0	20.0	N
324048	D 8	23.9	17.4	152.4	3.25	65.8	6.89	0.941	0.685	6.000	0.128	2.592	39.3	20.3	P
344148	D 8	25.1	17.8	152.4	3.66	72.2	10.14	0.988	0.700	6.000	0.144	2.844	57.9	19.8	Q
344248	D 8	24.7	16.6	152.4	4.06	83.3	16.63	0.972	0.652	6.000	0.160	3.280	95.0	20.5	S
M486932	D 8	24.0	19.0	160.0	2.50	58.8	1.81	0.945	0.748	6.299	0.098	2.313	10.3	23.5	M
M487132	D 8	24.0	18.4	160.0	2.80	70.0	2.78	0.945	0.724	6.299	0.110	2.756	15.9	25.0	N
M487232	D 8	24.0	18.0	160.0	3.00	77.3	3.65	0.945	0.709	6.299	0.118	3.041	20.8	25.8	P
M487432	D 8	24.0	17.3	160.0	3.35	88.8	5.79	0.945	0.681	6.299	0.132	3.495	33.0	26.5	Q
343708	D 9	26.1	21.4	25.4	2.34	10.5	8.81	1.028	0.844	1.000	0.092	0.414	50.3	4.5	F
343808	D 9	25.6	20.3	25.4	2.64	11.9	15.97	1.008	0.800	1.000	0.104	0.468	91.2	4.5	G
343908	D 9	26.0	20.1	25.4	2.95	13.3	24.37	1.024	0.792	1.000	0.116	0.522	139.2	4.5	G
344008	D 9	25.5	19.0	25.4	3.25	14.6	40.21	1.004	0.748	1.000	0.128	0.576	229.6	4.5	H
364108	D 9	26.7	19.4	25.4	3.66	15.5	64.48	1.051	0.763	1.000	0.144	0.612	368.2	4.3	J
364208	D 9	26.3	18.2	25.4	4.06	18.3	98.38	1.035	0.715	1.000	0.160	0.720	561.7	4.5	K
364308	D 9	25.9	17.0	25.4	4.47	20.1	160.84	1.020	0.668	1.000	0.176	0.792	918.4	4.5	L
343710	D 9	26.1	21.4	31.8	2.34	12.3	6.78	1.028	0.844	1.250	0.092	0.483	38.7	5.3	F
343810	D 9	25.6	20.3	31.8	2.64	13.9	12.28	1.008	0.800	1.250	0.104	0.546	70.1	5.3	G
343910	D 9	26.0	20.1	31.8	2.95	15.5	18.75	1.024	0.792	1.250	0.116	0.609	107.1	5.3	H
344010	D 9	25.5	19.0	31.8	3.25	17.1	30.93	1.004	0.748	1.250	0.128	0.672	176.6	5.3	J
364110	D 9	26.7	19.4	31.8	3.66	18.3	48.36	1.051	0.763	1.250	0.144	0.720	276.1	5.0	K
364210	D 9	26.3	18.2	31.8	4.06	21.3	75.67	1.035	0.715	1.250	0.160	0.840	432.1	5.3	L
364310	D 9	25.9	17.0	31.8	4.47	23.5	123.73	1.020	0.668	1.250	0.176	0.924	706.5	5.3	M
343712	D 9	26.1	21.4	38.1	2.34	13.4	5.88	1.028	0.844	1.500	0.092	0.529	33.6	5.8	F
343812	D 9	25.6	20.3	38.1	2.64	15.2	10.64	1.008	0.800	1.500	0.104	0.598	60.8	5.8	G
343912	D 9	26.0	20.1	38.1	2.95	17.7	15.23	1.024	0.792	1.500	0.116	0.696	87.0	6.0	H
344012	D 9	25.5	19.0	38.1	3.25	19.5	25.13	1.004	0.748	1.500	0.128	0.768	143.5	6.0	J
364112	D 9	26.7	19.4	38.1	3.66	21.0	38.69	1.051	0.763	1.500	0.144	0.828	220.9	5.8	K
364212	D 9	26.3	18.2	38.1	4.06	24.4	61.48	1.035	0.715	1.500	0.160	0.960	351.1	6.0	L
364312	D 9	25.9	17.0	38.1	4.47	26.8	100.53	1.020	0.668	1.500	0.176	1.056	574.0	6.0	M
343714	D 9	26.1	21.4	44.5	2.34	14.6	5.18	1.028	0.844	1.750	0.092	0.575	29.6	6.3	G
343814	D 9	25.6	20.3	44.5	2.64	17.2	8.87	1.008	0.800	1.750	0.104	0.676	50.6	6.5	H
343914	D 9	26.0	20.1	44.5	2.95	19.9	12.83	1.024	0.792	1.750	0.116	0.783	73.3	6.8	J
344014	D 9	25.5	19.0	44.5	3.25	21.9	21.17	1.004	0.748	1.750	0.128	0.864	120.9	6.8	J
364114	D 9	26.7	19.4	44.5	3.66	23.8	32.24	1.051	0.763	1.750	0.144	0.936	184.1	6.5	L
364214	D 9	26.3	18.2	44.5	4.06	27.4	51.78	1.035	0.715	1.750	0.160	1.080	295.6	6.8	M
364314	D 9	25.9	17.0	44.5	4.47	31.3	80.42	1.020	0.668	1.750	0.176	1.232	459.2	7.0	N
M527010	D 9	26.0	20.7	50.0	2.64	20.5	6.59	1.024	0.816	1.969	0.104	0.806	37.6	7.8	H

For Sales or Assistance - Tel 0117 967 3313

All characteristics are nominal

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No. of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	lbs/in	approx	
M527110	D 9	26.0	20.4	50.0	2.80	21.7	8.49	1.024	0.803	1.969	0.110	0.854	48.5	7.8	H
M527310	D 9	26.0	19.7	50.0	3.15	25.2	13.63	1.024	0.776	1.969	0.124	0.992	77.8	8.0	K
M527510	D 9	26.0	18.9	50.0	3.55	29.3	22.26	1.024	0.744	1.969	0.140	1.153	127.1	8.3	L
343716	D 9	26.1	21.4	50.8	2.34	16.4	4.41	1.028	0.844	2.000	0.092	0.644	25.2	7.0	G
343816	D 9	25.6	20.3	50.8	2.64	19.2	7.60	1.008	0.800	2.000	0.104	0.754	43.4	7.3	H
343916	D 9	26.0	20.1	50.8	2.95	22.1	11.08	1.024	0.792	2.000	0.116	0.870	63.3	7.5	J
344016	D 9	25.5	19.0	50.8	3.25	23.6	19.15	1.004	0.748	2.000	0.128	0.928	109.3	7.3	K
364116	D 9	26.7	19.4	50.8	3.66	26.5	27.63	1.051	0.763	2.000	0.144	1.044	157.8	7.3	L
364216	D 9	26.3	18.2	50.8	4.06	30.5	44.72	1.035	0.715	2.000	0.160	1.200	255.3	7.5	M
364316	D 9	25.9	17.0	50.8	4.47	34.6	69.93	1.020	0.668	2.000	0.176	1.364	399.3	7.8	N
M527012	D 9	26.0	20.7	60.0	2.64	23.8	5.41	1.024	0.816	2.362	0.104	0.936	30.9	9.0	H
M527112	D 9	26.0	20.4	60.0	2.80	25.2	6.97	1.024	0.803	2.362	0.110	0.992	39.8	9.0	J
M527312	D 9	26.0	19.7	60.0	3.15	29.9	10.91	1.024	0.776	2.362	0.124	1.178	62.3	9.5	K
M527512	D 9	26.0	18.9	60.0	3.55	34.6	17.95	1.024	0.744	2.362	0.140	1.363	102.5	9.8	L
343720	D 9	26.1	21.4	63.5	2.34	19.9	3.39	1.028	0.844	2.500	0.092	0.782	19.4	8.5	G
343820	D 9	25.6	20.3	63.5	2.64	23.1	5.91	1.008	0.800	2.500	0.104	0.910	33.8	8.8	H
343920	D 9	26.0	20.1	63.5	2.95	25.8	9.03	1.024	0.792	2.500	0.116	1.015	51.5	8.8	J
344020	D 9	25.5	19.0	63.5	3.25	28.4	14.89	1.004	0.748	2.500	0.128	1.120	85.0	8.8	K
364120	D 9	26.7	19.4	63.5	3.66	31.1	22.32	1.051	0.763	2.500	0.144	1.224	127.4	8.5	M
364220	D 9	26.3	18.2	63.5	4.06	36.6	35.13	1.035	0.715	2.500	0.160	1.440	200.6	9.0	N
364320	D 9	25.9	17.0	63.5	4.47	41.3	55.46	1.020	0.668	2.500	0.176	1.628	316.7	9.3	P
M527014	D 9	26.0	20.7	70.0	2.64	27.1	4.59	1.024	0.816	2.756	0.104	1.066	26.2	10.3	J
M527114	D 9	26.0	20.4	70.0	2.80	29.4	5.74	1.024	0.803	2.756	0.110	1.157	32.8	10.5	J
M527314	D 9	26.0	19.7	70.0	3.15	34.7	9.09	1.024	0.776	2.756	0.124	1.364	51.9	11.0	L
M527514	D 9	26.0	18.9	70.0	3.55	39.9	15.04	1.024	0.744	2.756	0.140	1.572	85.9	11.3	M
343724	D 9	26.1	21.4	76.2	2.34	22.8	2.84	1.028	0.844	3.000	0.092	0.897	16.2	9.8	H
343824	D 9	25.6	20.3	76.2	2.64	26.4	4.99	1.008	0.800	3.000	0.104	1.040	28.5	10.0	J
343924	D 9	26.0	20.1	76.2	2.95	30.2	7.39	1.024	0.792	3.000	0.116	1.189	42.2	10.3	K
344024	D 9	25.5	19.0	76.2	3.25	33.3	12.19	1.004	0.748	3.000	0.128	1.312	69.6	10.3	L
364124	D 9	26.7	19.4	76.2	3.66	35.7	18.72	1.051	0.763	3.000	0.144	1.404	106.9	9.8	M
364224	D 9	26.3	18.2	76.2	4.06	41.7	29.81	1.035	0.715	3.000	0.160	1.640	170.2	10.3	N
364324	D 9	25.9	17.0	76.2	4.47	48.1	45.96	1.020	0.668	3.000	0.176	1.892	262.4	10.8	Q
M527016	D 9	26.0	20.7	80.0	2.64	30.4	3.99	1.024	0.816	3.150	0.104	1.196	22.8	11.5	J
M527116	D 9	26.0	20.4	80.0	2.80	32.9	5.00	1.024	0.803	3.150	0.110	1.295	28.6	11.8	K
M527316	D 9	26.0	19.7	80.0	3.15	38.6	7.98	1.024	0.776	3.150	0.124	1.519	45.6	12.3	L
M527516	D 9	26.0	18.9	80.0	3.55	45.3	12.94	1.024	0.744	3.150	0.140	1.782	73.9	12.8	M
343728	D 9	26.1	21.4	88.9	2.34	25.7	2.45	1.028	0.844	3.500	0.092	1.012	14.0	11.0	H
343828	D 9	25.6	20.3	88.9	2.64	29.7	4.31	1.008	0.800	3.500	0.104	1.170	24.6	11.3	J
343928	D 9	26.0	20.1	88.9	2.95	34.6	6.25	1.024	0.792	3.500	0.116	1.363	35.7	11.8	K
344028	D 9	25.5	19.0	88.9	3.25	38.2	10.31	1.004	0.748	3.500	0.128	1.504	58.9	11.8	L
364128	D 9	26.7	19.4	88.9	3.66	41.2	15.68	1.051	0.763	3.500	0.144	1.620	89.6	11.3	N
364228	D 9	26.3	18.2	88.9	4.06	47.8	25.22	1.035	0.715	3.500	0.160	1.880	144.0	11.8	P
364328	D 9	25.9	17.0	88.9	4.47	54.8	39.23	1.020	0.668	3.500	0.176	2.156	224.0	12.3	Q
M527020	D 9	26.0	20.7	100.0	2.64	37.0	3.16	1.024	0.816	3.937	0.104	1.456	18.0	14.0	K
M527120	D 9	26.0	20.4	100.0	2.80	39.9	3.98	1.024	0.803	3.937	0.110	1.571	22.7	14.3	L
M527320	D 9	26.0	19.7	100.0	3.15	48.0	6.17	1.024	0.776	3.937	0.124	1.891	35.3	15.3	M
M527520	D 9	26.0	18.9	100.0	3.55	55.9	10.12	1.024	0.744	3.937	0.140	2.201	57.8	15.8	N
343732	D 9	26.1	21.4	101.6	2.34	29.2	2.10	1.028	0.844	4.000	0.092	1.150	12.0	12.5	J
343832	D 9	25.6	20.3	101.6	2.64	33.0	3.80	1.008	0.800	4.000	0.104	1.300	21.7	12.5	K
343932	D 9	26.0	20.1	101.6	2.95	39.0	5.42	1.024	0.792	4.000	0.116	1.537	30.9	13.3	L
344032	D 9	25.5	19.0	101.6	3.25	43.1	8.94	1.004	0.748	4.000	0.128	1.696	51.0	13.3	M

Choose from millions of sizes - www.flexosprings.com

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	Lbs/in	approx	
364132	D 9	26.7	19.4	101.6	3.66	45.7	13.82	1.051	0.763	4.000	0.144	1.800	78.9	12.5	P
364232	D 9	26.3	18.2	101.6	4.06	53.8	21.86	1.035	0.715	4.000	0.160	2.120	124.8	13.3	Q
364332	D 9	25.9	17.0	101.6	4.47	61.5	34.22	1.020	0.668	4.000	0.176	2.420	195.4	13.8	R
M527024	D 9	26.0	20.7	120.0	2.64	44.3	2.57	1.024	0.816	4.724	0.104	1.742	14.7	16.8	L
M527124	D 9	26.0	20.4	120.0	2.80	47.6	3.25	1.024	0.803	4.724	0.110	1.874	18.6	17.0	L
M527324	D 9	26.0	19.7	120.0	3.15	56.7	5.11	1.024	0.776	4.724	0.124	2.232	29.2	18.0	N
M527524	D 9	26.0	18.9	120.0	3.55	66.6	8.31	1.024	0.744	4.724	0.140	2.621	47.4	18.8	P
343740	D 9	26.1	21.4	127.0	2.34	35.1	1.70	1.028	0.844	5.000	0.092	1.380	9.7	15.0	K
343840	D 9	25.6	20.3	127.0	2.64	40.3	3.01	1.008	0.800	5.000	0.104	1.586	17.2	15.3	L
343940	D 9	26.0	20.1	127.0	2.95	47.1	4.35	1.024	0.792	5.000	0.116	1.856	24.9	16.0	M
344040	D 9	25.5	19.0	127.0	3.25	52.0	7.18	1.004	0.748	5.000	0.128	2.048	41.0	16.0	N
364140	D 9	26.7	19.4	127.0	3.66	55.8	10.95	1.051	0.763	5.000	0.144	2.196	62.5	15.3	Q
364240	D 9	26.3	18.2	127.0	4.06	66.0	17.26	1.035	0.715	5.000	0.160	2.600	98.5	16.3	R
364340	D 9	25.9	17.0	127.0	4.47	74.9	27.26	1.020	0.668	5.000	0.176	2.948	155.7	16.8	S
M527028	D 9	26.0	20.7	140.0	2.64	50.9	2.20	1.024	0.816	5.512	0.104	2.002	12.5	19.3	M
M527128	D 9	26.0	20.4	140.0	2.80	55.3	2.75	1.024	0.803	5.512	0.110	2.177	15.7	19.8	M
M527328	D 9	26.0	19.7	140.0	3.15	66.2	4.31	1.024	0.776	5.512	0.124	2.604	24.6	21.0	N
M527528	D 9	26.0	18.9	140.0	3.55	77.2	7.04	1.024	0.744	5.512	0.140	3.040	40.2	21.8	Q
343748	D 9	26.1	21.4	152.4	2.34	40.9	1.42	1.028	0.844	6.000	0.092	1.610	8.1	17.5	L
343848	D 9	25.6	20.3	152.4	2.64	47.6	2.49	1.008	0.800	6.000	0.104	1.872	14.2	18.0	M
343948	D 9	26.0	20.1	152.4	2.95	55.2	3.64	1.024	0.792	6.000	0.116	2.175	20.8	18.8	N
344048	D 9	25.5	19.0	152.4	3.25	61.8	5.91	1.004	0.748	6.000	0.128	2.432	33.8	19.0	P
364148	D 9	26.7	19.4	152.4	3.66	66.8	8.93	1.051	0.763	6.000	0.144	2.628	51.0	18.3	Q
364248	D 9	26.3	18.2	152.4	4.06	77.2	14.47	1.035	0.715	6.000	0.160	3.040	82.6	19.0	S
364348	D 9	25.9	17.0	152.4	4.47	88.3	22.65	1.020	0.668	6.000	0.176	3.476	129.4	19.8	T
M527032	D 9	26.0	20.7	160.0	2.64	57.5	1.92	1.024	0.816	6.299	0.104	2.262	11.0	21.8	M
M527132	D 9	26.0	20.4	160.0	2.80	62.3	2.41	1.024	0.803	6.299	0.110	2.453	13.8	22.3	N
M527332	D 9	26.0	19.7	160.0	3.15	74.8	3.76	1.024	0.776	6.299	0.124	2.945	21.5	23.8	P
M527532	D 9	26.0	18.9	160.0	3.55	87.9	6.12	1.024	0.744	6.299	0.140	3.459	34.9	24.8	Q
363808	E 1	27.2	21.9	25.4	2.64	11.2	14.49	1.071	0.863	1.000	0.104	0.442	82.8	4.3	G
363908	E 1	27.5	21.6	25.4	2.95	12.5	22.42	1.083	0.851	1.000	0.116	0.493	128.0	4.3	G
364008	E 1	27.1	20.6	25.4	3.25	13.8	36.28	1.067	0.811	1.000	0.128	0.544	207.2	4.3	H
363810	E 1	27.2	21.9	31.8	2.64	13.2	10.87	1.071	0.863	1.250	0.104	0.520	62.1	5.0	G
363910	E 1	27.5	21.6	31.8	2.95	14.7	16.81	1.083	0.851	1.250	0.116	0.580	96.0	5.0	H
364010	E 1	27.1	20.6	31.8	3.25	16.3	27.21	1.067	0.811	1.250	0.128	0.640	155.4	5.0	J
384110	E 1	28.2	20.9	31.8	3.66	18.3	40.02	1.110	0.822	1.250	0.144	0.720	228.5	5.0	K
384210	E 1	27.9	19.8	31.8	4.06	20.3	66.55	1.098	0.778	1.250	0.160	0.800	380.0	5.0	L
384310	E 1	27.5	18.6	31.8	4.47	23.5	99.69	1.083	0.731	1.250	0.176	0.924	569.2	5.3	M
363812	E 1	27.2	21.9	38.1	2.64	15.2	8.70	1.071	0.863	1.500	0.104	0.598	49.7	5.8	G
363912	E 1	27.5	21.6	38.1	2.95	16.9	13.45	1.083	0.851	1.500	0.116	0.667	76.8	5.8	H
364012	E 1	27.1	20.6	38.1	3.25	18.7	21.77	1.067	0.811	1.500	0.128	0.736	124.3	5.8	J
384112	E 1	28.2	20.9	38.1	3.66	20.1	34.31	1.110	0.822	1.500	0.144	0.792	195.9	5.5	K
384212	E 1	27.9	19.8	38.1	4.06	23.4	53.24	1.098	0.778	1.500	0.160	0.920	304.0	5.8	L
384312	E 1	27.5	18.6	38.1	4.47	25.7	86.40	1.083	0.731	1.500	0.176	1.012	493.3	5.8	M
363814	E 1	27.2	21.9	44.5	2.64	16.5	7.67	1.071	0.863	1.750	0.104	0.650	43.8	6.3	H
363914	E 1	27.5	21.6	44.5	2.95	18.4	11.87	1.083	0.851	1.750	0.116	0.725	67.8	6.3	J
364014	E 1	27.1	20.6	44.5	3.25	20.3	19.21	1.067	0.811	1.750	0.128	0.800	109.7	6.3	J
384114	E 1	28.2	20.9	44.5	3.66	22.9	28.25	1.110	0.822	1.750	0.144	0.900	161.3	6.3	L
384214	E 1	27.9	19.8	44.5	4.06	26.4	44.37	1.098	0.778	1.750	0.160	1.040	253.4	6.5	M
384314	E 1	27.5	18.6	44.5	4.47	29.1	72.00	1.083	0.731	1.750	0.176	1.144	411.1	6.5	N
363816	E 1	27.2	21.9	50.8	2.64	18.5	6.52	1.071	0.863	2.000	0.104	0.728	37.2	7.0	H

For Sales or Assistance - Tel 0117 967 3313


All characteristics are nominal



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	Lbs/in	approx	
363916	E 1	27.5	21.6	50.8	2.95	20.6	10.09	1.083	0.851	2.000	0.116	0.812	57.6	7.0	J
364016	E 1	27.1	20.6	50.8	3.25	22.8	16.33	1.067	0.811	2.000	0.128	0.896	93.2	7.0	K
384116	E 1	28.2	20.9	50.8	3.66	25.6	24.01	1.110	0.822	2.000	0.144	1.008	137.1	7.0	L
384216	E 1	27.9	19.8	50.8	4.06	29.5	38.03	1.098	0.778	2.000	0.160	1.160	217.2	7.3	M
384316	E 1	27.5	18.6	50.8	4.47	32.4	61.71	1.083	0.731	2.000	0.176	1.276	352.4	7.3	N
M567112	E 1	28.0	22.4	60.0	2.80	23.1	6.09	1.102	0.882	2.362	0.110	0.909	34.8	8.3	J
M567312	E 1	28.0	21.7	60.0	3.15	27.6	9.42	1.102	0.854	2.362	0.124	1.085	53.8	8.8	K
M567512	E 1	28.0	20.9	60.0	3.55	32.0	15.39	1.102	0.823	2.362	0.140	1.258	87.9	9.0	L
M567612	E 1	28.0	20.5	60.0	3.75	33.8	19.64	1.102	0.807	2.362	0.148	1.329	112.1	9.0	M
363820	E 1	27.2	21.9	63.5	2.64	21.8	5.22	1.071	0.863	2.500	0.104	0.858	29.8	8.3	H
363920	E 1	27.5	21.6	63.5	2.95	24.3	8.07	1.083	0.851	2.500	0.116	0.957	46.1	8.3	J
364020	E 1	27.1	20.6	63.5	3.25	26.8	13.06	1.067	0.811	2.500	0.128	1.056	74.6	8.3	K
384120	E 1	28.2	20.9	63.5	3.66	30.2	19.21	1.110	0.822	2.500	0.144	1.188	109.7	8.3	M
384220	E 1	27.9	19.8	63.5	4.06	34.5	30.72	1.098	0.778	2.500	0.160	1.360	175.4	8.5	N
384320	E 1	27.5	18.6	63.5	4.47	39.1	48.00	1.083	0.731	2.500	0.176	1.540	274.1	8.8	P
M567114	E 1	28.0	22.4	70.0	2.80	26.6	5.08	1.102	0.882	2.756	0.110	1.047	29.0	9.5	J
M567314	E 1	28.0	21.7	70.0	3.15	31.5	7.95	1.102	0.854	2.756	0.124	1.240	45.4	10.0	L
M567514	E 1	28.0	20.9	70.0	3.55	36.4	13.06	1.102	0.823	2.756	0.140	1.433	74.5	10.3	M
M567614	E 1	28.0	20.5	70.0	3.75	39.4	16.17	1.102	0.807	2.756	0.148	1.550	92.3	10.5	M
363824	E 1	27.2	21.9	76.2	2.64	25.1	4.35	1.071	0.863	3.000	0.104	0.988	24.8	9.5	J
363924	E 1	27.5	21.6	76.2	2.95	28.0	6.72	1.083	0.851	3.000	0.116	1.102	38.4	9.5	K
364024	E 1	27.1	20.6	76.2	3.25	31.7	10.53	1.067	0.811	3.000	0.128	1.248	60.1	9.8	L
384124	E 1	28.2	20.9	76.2	3.66	34.8	16.01	1.110	0.822	3.000	0.144	1.368	91.4	9.5	M
384224	E 1	27.9	19.8	76.2	4.06	39.6	25.76	1.098	0.778	3.000	0.160	1.560	147.1	9.8	N
384324	E 1	27.5	18.6	76.2	4.47	44.7	40.50	1.083	0.731	3.000	0.176	1.760	231.2	10.0	Q
M567116	E 1	28.0	22.4	80.0	2.80	30.1	4.35	1.102	0.882	3.150	0.110	1.185	24.8	10.8	K
M567316	E 1	28.0	21.7	80.0	3.15	35.4	6.88	1.102	0.854	3.150	0.124	1.395	39.3	11.3	L
M567516	E 1	28.0	20.9	80.0	3.55	41.7	11.05	1.102	0.823	3.150	0.140	1.642	63.1	11.8	M
M567616	E 1	28.0	20.5	80.0	3.75	45.0	13.75	1.102	0.807	3.150	0.148	1.772	78.5	12.0	N
363828	E 1	27.2	21.9	88.9	2.64	28.4	3.73	1.071	0.863	3.500	0.104	1.118	21.3	10.8	J
363928	E 1	27.5	21.6	88.9	2.95	31.7	5.76	1.083	0.851	3.500	0.116	1.247	32.9	10.8	K
364028	E 1	27.1	20.6	88.9	3.25	35.8	9.07	1.067	0.811	3.500	0.128	1.408	51.8	11.0	L
384128	E 1	28.2	20.9	88.9	3.66	39.3	13.72	1.110	0.822	3.500	0.144	1.548	78.4	10.8	N
384228	E 1	27.9	19.8	88.9	4.06	45.7	21.59	1.098	0.778	3.500	0.160	1.800	123.3	11.3	P
384328	E 1	27.5	18.6	88.9	4.47	51.4	34.10	1.083	0.731	3.500	0.176	2.024	194.7	11.5	Q
M567120	E 1	28.0	22.4	100.0	2.80	36.4	3.46	1.102	0.882	3.937	0.110	1.433	19.8	13.0	L
M567320	E 1	28.0	21.7	100.0	3.15	44.1	5.30	1.102	0.854	3.937	0.124	1.736	30.3	14.0	M
M567520	E 1	28.0	20.9	100.0	3.55	51.5	8.62	1.102	0.823	3.937	0.140	2.027	49.2	14.5	N
M567620	E 1	28.0	20.5	100.0	3.75	55.3	10.78	1.102	0.807	3.937	0.148	2.178	61.6	14.8	P
363832	E 1	27.2	21.9	101.6	2.64	31.7	3.26	1.071	0.863	4.000	0.104	1.248	18.6	12.0	K
363932	E 1	27.5	21.6	101.6	2.95	35.4	5.04	1.083	0.851	4.000	0.116	1.392	28.8	12.0	L
364032	E 1	27.1	20.6	101.6	3.25	39.8	7.96	1.067	0.811	4.000	0.128	1.568	45.5	12.3	M
384132	E 1	28.2	20.9	101.6	3.66	43.9	12.01	1.110	0.822	4.000	0.144	1.728	68.6	12.0	P
384232	E 1	27.9	19.8	101.6	4.06	50.8	19.02	1.098	0.778	4.000	0.160	2.000	108.6	12.5	Q
384332	E 1	27.5	18.6	101.6	4.47	58.1	29.45	1.083	0.731	4.000	0.176	2.288	168.2	13.0	R
M567124	E 1	28.0	22.4	120.0	2.80	43.4	2.82	1.102	0.882	4.724	0.110	1.709	16.1	15.5	L
M567324	E 1	28.0	21.7	120.0	3.15	52.0	4.39	1.102	0.854	4.724	0.124	2.046	25.0	16.5	N
M567524	E 1	28.0	20.9	120.0	3.55	61.2	7.06	1.102	0.823	4.724	0.140	2.411	40.3	17.3	P
M567624	E 1	28.0	20.5	120.0	3.75	65.6	8.87	1.102	0.807	4.724	0.148	2.584	50.6	17.5	Q
363840	E 1	27.2	21.9	127.0	2.64	39.0	2.56	1.071	0.863	5.000	0.104	1.534	14.6	14.8	L
363940	E 1	27.5	21.6	127.0	2.95	43.5	3.96	1.083	0.851	5.000	0.116	1.711	22.6	14.8	M

Choose from millions of sizes - www.flexosprings.com

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	lbs/in	approx	
364040	E 1	27.1	20.6	127.0	3.25	48.8	6.28	1.067	0.811	5.000	0.128	1.920	35.9	15.0	N
384140	E 1	28.2	20.9	127.0	3.66	53.0	9.61	1.110	0.822	5.000	0.144	2.088	54.8	14.5	Q
384240	E 1	27.9	19.8	127.0	4.06	62.0	15.07	1.098	0.778	5.000	0.160	2.440	86.0	15.3	R
384340	E 1	27.5	18.6	127.0	4.47	70.4	23.56	1.083	0.731	5.000	0.176	2.772	134.5	15.8	S
M567128	E 1	28.0	22.4	140.0	2.80	49.7	2.42	1.102	0.882	5.512	0.110	1.957	13.8	17.8	M
M567328	E 1	28.0	21.7	140.0	3.15	59.9	3.74	1.102	0.854	5.512	0.124	2.356	21.4	19.0	N
M567528	E 1	28.0	20.9	140.0	3.55	71.0	5.98	1.102	0.823	5.512	0.140	2.795	34.2	20.0	Q
M567628	E 1	28.0	20.5	140.0	3.75	75.9	7.53	1.102	0.807	5.512	0.148	2.990	43.0	20.3	Q
363848	E 1	27.2	21.9	152.4	2.64	45.6	2.14	1.071	0.863	6.000	0.104	1.794	12.2	17.3	M
363948	E 1	27.5	21.6	152.4	2.95	50.8	3.31	1.083	0.851	6.000	0.116	2.001	18.9	17.3	N
364048	E 1	27.1	20.6	152.4	3.25	57.7	5.18	1.067	0.811	6.000	0.128	2.272	29.6	17.8	P
384148	E 1	28.2	20.9	152.4	3.66	63.1	7.87	1.110	0.822	6.000	0.144	2.484	45.0	17.3	Q
384248	E 1	27.9	19.8	152.4	4.06	73.2	12.48	1.098	0.778	6.000	0.160	2.880	71.3	18.0	S
384348	E 1	27.5	18.6	152.4	4.47	82.7	19.64	1.083	0.731	6.000	0.176	3.256	112.1	18.5	T
M567132	E 1	28.0	22.4	160.0	2.80	56.7	2.09	1.102	0.882	6.299	0.110	2.232	11.9	20.3	N
M567332	E 1	28.0	21.7	160.0	3.15	68.5	3.22	1.102	0.854	6.299	0.124	2.697	18.4	21.8	P
M567532	E 1	28.0	20.9	160.0	3.55	80.8	5.19	1.102	0.823	6.299	0.140	3.180	29.6	22.8	Q
M567632	E 1	28.0	20.5	160.0	3.75	86.3	6.55	1.102	0.807	6.299	0.148	3.396	37.4	23.0	R
384156	E 1	28.2	20.9	177.8	3.66	72.2	6.76	1.110	0.822	7.000	0.144	2.844	38.6	19.8	R
384256	E 1	27.9	19.8	177.8	4.06	84.3	10.65	1.098	0.778	7.000	0.160	3.320	60.8	20.8	T
384356	E 1	27.5	18.6	177.8	4.47	96.1	16.61	1.083	0.731	7.000	0.176	3.784	94.9	21.5	U
M567136	E 1	28.0	22.4	180.0	2.80	63.0	1.86	1.102	0.882	7.087	0.110	2.480	10.6	22.5	N
M567336	E 1	28.0	21.7	180.0	3.15	76.4	2.86	1.102	0.854	7.087	0.124	3.007	16.3	24.3	Q
M567536	E 1	28.0	20.9	180.0	3.55	90.5	4.58	1.102	0.823	7.087	0.140	3.564	26.2	25.5	R
M567636	E 1	28.0	20.5	180.0	3.75	96.6	5.79	1.102	0.807	7.087	0.148	3.802	33.0	25.8	S
383810	E 2	28.8	23.5	31.8	2.64	12.5	9.81	1.134	0.926	1.250	0.104	0.494	56.0	4.8	G
383910	E 2	29.1	23.2	31.8	2.95	14.0	15.18	1.146	0.914	1.250	0.116	0.551	86.7	4.8	H
384010	E 2	28.7	22.2	31.8	3.25	15.4	24.43	1.130	0.874	1.250	0.128	0.608	139.5	4.8	J
404110	E 2	29.9	22.6	31.8	3.66	17.4	35.71	1.177	0.889	1.250	0.144	0.684	203.9	4.8	K
404210	E 2	29.5	21.4	31.8	4.06	19.3	59.75	1.161	0.841	1.250	0.160	0.760	341.2	4.8	L
404310	E 2	29.1	20.2	31.8	4.47	21.2	96.31	1.146	0.794	1.250	0.176	0.836	550.0	4.8	M
383812	E 2	28.8	23.5	38.1	2.64	14.5	7.71	1.134	0.926	1.500	0.104	0.572	44.0	5.5	G
383912	E 2	29.1	23.2	38.1	2.95	16.2	11.92	1.146	0.914	1.500	0.116	0.638	68.1	5.5	H
384012	E 2	28.7	22.2	38.1	3.25	17.9	19.19	1.130	0.874	1.500	0.128	0.704	109.6	5.5	J
404112	E 2	29.9	22.6	38.1	3.66	19.2	30.22	1.177	0.889	1.500	0.144	0.756	172.6	5.3	K
404212	E 2	29.5	21.4	38.1	4.06	22.4	46.94	1.161	0.841	1.500	0.160	0.880	268.1	5.5	L
404312	E 2	29.1	20.2	38.1	4.47	24.6	75.67	1.146	0.794	1.500	0.176	0.968	432.1	5.5	M
383814	E 2	28.8	23.5	44.5	2.64	15.9	6.75	1.134	0.926	1.750	0.104	0.624	38.5	6.0	H
383914	E 2	29.1	23.2	44.5	2.95	17.7	10.43	1.146	0.914	1.750	0.116	0.696	59.6	6.0	J
384014	E 2	28.7	22.2	44.5	3.25	20.3	15.81	1.130	0.874	1.750	0.128	0.800	90.3	6.3	J
404114	E 2	29.9	22.6	44.5	3.66	21.9	24.55	1.177	0.889	1.750	0.144	0.864	140.2	6.0	L
404214	E 2	29.5	21.4	44.5	4.06	24.4	41.08	1.161	0.841	1.750	0.160	0.960	234.5	6.0	M
404314	E 2	29.1	20.2	44.5	4.47	27.9	62.32	1.146	0.794	1.750	0.176	1.100	355.9	6.3	N
383816	E 2	28.8	23.5	50.8	2.64	17.8	5.68	1.134	0.926	2.000	0.104	0.702	32.4	6.8	H
383916	E 2	29.1	23.2	50.8	2.95	19.9	8.79	1.146	0.914	2.000	0.116	0.783	50.2	6.8	J
384016	E 2	28.7	22.2	50.8	3.25	21.9	14.14	1.130	0.874	2.000	0.128	0.864	80.8	6.8	K
404116	E 2	29.9	22.6	50.8	3.66	23.8	21.83	1.177	0.889	2.000	0.144	0.936	124.6	6.5	L
404216	E 2	29.5	21.4	50.8	4.06	27.4	34.59	1.161	0.841	2.000	0.160	1.080	197.5	6.8	M
404316	E 2	29.1	20.2	50.8	4.47	31.3	52.97	1.146	0.794	2.000	0.176	1.232	302.5	7.0	N
383820	E 2	28.8	23.5	63.5	2.64	20.5	4.69	1.134	0.926	2.500	0.104	0.806	26.8	7.8	H
383920	E 2	29.1	23.2	63.5	2.95	22.8	7.26	1.146	0.914	2.500	0.116	0.899	41.4	7.8	J

For Sales or Assistance - Tel 0117 967 3313

All characteristics are nominal


Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	lbs/in	approx	
384020	E 2	28.7	22.2	63.5	3.25	26.0	11.20	1.130	0.874	2.500	0.128	1.024	63.9	8.0	K
404120	E 2	29.9	22.6	63.5	3.66	28.3	17.08	1.177	0.889	2.500	0.144	1.116	97.5	7.8	M
404220	E 2	29.5	21.4	63.5	4.06	32.5	27.38	1.161	0.841	2.500	0.160	1.280	156.4	8.0	N
404320	E 2	29.1	20.2	63.5	4.47	36.9	42.38	1.146	0.794	2.500	0.176	1.452	242.0	8.3	P
383824	E 2	28.8	23.5	76.2	2.64	23.8	3.85	1.134	0.926	3.000	0.104	0.936	22.0	9.0	J
383924	E 2	29.1	23.2	76.2	2.95	26.5	5.96	1.146	0.914	3.000	0.116	1.044	34.0	9.0	K
384024	E 2	28.7	22.2	76.2	3.25	30.1	9.27	1.130	0.874	3.000	0.128	1.184	52.9	9.3	L
404124	E 2	29.9	22.6	76.2	3.66	32.9	14.03	1.177	0.889	3.000	0.144	1.296	80.1	9.0	M
404224	E 2	29.5	21.4	76.2	4.06	37.6	22.66	1.161	0.841	3.000	0.160	1.480	129.4	9.3	N
404324	E 2	29.1	20.2	76.2	4.47	42.5	35.31	1.146	0.794	3.000	0.176	1.672	201.6	9.5	Q
383828	E 2	28.8	23.5	88.9	2.64	27.1	3.27	1.134	0.926	3.500	0.104	1.066	18.7	10.3	J
383928	E 2	29.1	23.2	88.9	2.95	30.2	5.06	1.146	0.914	3.500	0.116	1.189	28.9	10.3	K
384028	E 2	28.7	22.2	88.9	3.25	33.3	8.14	1.130	0.874	3.500	0.128	1.312	46.5	10.3	L
404128	E 2	29.9	22.6	88.9	3.66	37.5	11.90	1.177	0.889	3.500	0.144	1.476	68.0	10.3	N
404228	E 2	29.5	21.4	88.9	4.06	42.7	19.33	1.161	0.841	3.500	0.160	1.680	110.4	10.5	P
404328	E 2	29.1	20.2	88.9	4.47	48.1	30.27	1.146	0.794	3.500	0.176	1.892	172.8	10.8	Q
383832	E 2	28.8	23.5	101.6	2.64	30.4	2.84	1.134	0.926	4.000	0.104	1.196	16.2	11.5	K
383932	E 2	29.1	23.2	101.6	2.95	33.9	4.39	1.146	0.914	4.000	0.116	1.334	25.1	11.5	L
384032	E 2	28.7	22.2	101.6	3.25	38.2	6.89	1.130	0.874	4.000	0.128	1.504	39.3	11.8	M
404132	E 2	29.9	22.6	101.6	3.66	42.1	10.34	1.177	0.889	4.000	0.144	1.656	59.0	11.5	P
404232	E 2	29.5	21.4	101.6	4.06	47.8	16.85	1.161	0.841	4.000	0.160	1.880	96.2	11.8	Q
404332	E 2	29.1	20.2	101.6	4.47	53.6	26.49	1.146	0.794	4.000	0.176	2.112	151.2	12.0	R
383840	E 2	28.8	23.5	127.0	2.64	36.3	2.30	1.134	0.926	5.000	0.104	1.430	13.1	13.8	L
383940	E 2	29.1	23.2	127.0	2.95	40.5	3.55	1.146	0.914	5.000	0.116	1.595	20.3	13.8	M
384040	E 2	28.7	22.2	127.0	3.25	46.3	5.48	1.130	0.874	5.000	0.128	1.824	31.3	14.3	N
404140	E 2	29.9	22.6	127.0	3.66	50.3	8.36	1.177	0.889	5.000	0.144	1.980	47.7	13.8	Q
404240	E 2	29.5	21.4	127.0	4.06	57.9	13.41	1.161	0.841	5.000	0.160	2.280	76.6	14.3	R
404340	E 2	29.1	20.2	127.0	4.47	65.9	20.77	1.146	0.794	5.000	0.176	2.596	118.6	14.8	S
383848	E 2	28.8	23.5	152.4	2.64	42.9	1.89	1.134	0.926	6.000	0.104	1.690	10.8	16.3	M
383948	E 2	29.1	23.2	152.4	2.95	47.9	2.93	1.146	0.914	6.000	0.116	1.885	16.7	16.3	N
384048	E 2	28.7	22.2	152.4	3.25	54.5	4.55	1.130	0.874	6.000	0.128	2.144	26.0	16.8	P
404148	E 2	29.9	22.6	152.4	3.66	59.4	6.89	1.177	0.889	6.000	0.144	2.340	39.4	16.3	Q
404248	E 2	29.5	21.4	152.4	4.06	68.1	11.14	1.161	0.841	6.000	0.160	2.680	63.6	16.8	S
404348	E 2	29.1	20.2	152.4	4.47	77.1	17.37	1.146	0.794	6.000	0.176	3.036	99.2	17.3	T
383856	E 2	28.8	23.5	177.8	2.64	49.5	1.61	1.134	0.926	7.000	0.104	1.950	9.2	18.8	N
383956	E 2	29.1	23.2	177.8	2.95	55.2	2.49	1.146	0.914	7.000	0.116	2.175	14.2	18.8	P
384056	E 2	28.7	22.2	177.8	3.25	64.2	3.78	1.130	0.874	7.000	0.128	2.528	21.6	19.8	Q
404156	E 2	29.9	22.6	177.8	3.66	68.6	5.86	1.177	0.889	7.000	0.144	2.700	33.5	18.8	R
404256	E 2	29.5	21.4	177.8	4.06	78.2	9.52	1.161	0.841	7.000	0.160	3.080	54.4	19.3	T
404356	E 2	29.1	20.2	177.8	4.47	88.3	14.92	1.146	0.794	7.000	0.176	3.476	85.2	19.8	U
403810	E 3	30.4	25.1	31.8	2.64	12.5	8.21	1.197	0.989	1.250	0.104	0.494	46.9	4.8	G
403910	E 3	30.7	24.8	31.8	2.95	14.0	12.70	1.209	0.977	1.250	0.116	0.551	72.5	4.8	H
404010	E 3	30.2	23.7	31.8	3.25	15.4	20.57	1.189	0.933	1.250	0.128	0.608	117.5	4.8	J
403812	E 3	30.4	25.1	38.1	2.64	13.9	6.95	1.197	0.989	1.500	0.104	0.546	39.7	5.3	H
403912	E 3	30.7	24.8	38.1	2.95	15.5	10.75	1.209	0.977	1.500	0.116	0.609	61.4	5.3	J
404012	E 3	30.2	23.7	38.1	3.25	17.1	17.41	1.189	0.933	1.500	0.128	0.672	99.4	5.3	J
424112	E 3	31.4	24.1	38.1	3.66	19.2	25.58	1.236	0.948	1.500	0.144	0.756	146.0	5.3	L
424212	E 3	31.0	22.9	38.1	4.06	21.3	42.57	1.220	0.900	1.500	0.160	0.840	243.1	5.3	M
424312	E 3	30.7	21.8	38.1	4.47	23.5	67.47	1.209	0.857	1.500	0.176	0.924	385.3	5.3	N
403814	E 3	30.4	25.1	44.5	2.64	15.2	6.02	1.197	0.989	1.750	0.104	0.598	34.4	5.8	H
403914	E 3	30.7	24.8	44.5	2.95	16.9	9.31	1.209	0.977	1.750	0.116	0.667	53.2	5.8	J

Choose from millions of sizes - www.flexosprings.com

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	Lbs/in	approx	
404014	E 3	30.2	23.7	44.5	3.25	19.5	14.14	1.189	0.933	1.750	0.128	0.768	80.8	6.0	K
424114	E 3	31.4	24.1	44.5	3.66	21.0	22.17	1.236	0.948	1.750	0.144	0.828	126.6	5.8	L
424214	E 3	31.0	22.9	44.5	4.06	24.4	34.59	1.220	0.900	1.750	0.160	0.960	197.5	6.0	M
424314	E 3	30.7	21.8	44.5	4.47	26.8	54.82	1.209	0.857	1.750	0.176	1.056	313.0	6.0	N
403816	E 3	30.4	25.1	50.8	2.64	17.2	5.02	1.197	0.989	2.000	0.104	0.676	28.7	6.5	H
403916	E 3	30.7	24.8	50.8	2.95	19.1	7.76	1.209	0.977	2.000	0.116	0.754	44.3	6.5	J
404016	E 3	30.2	23.7	50.8	3.25	21.1	12.57	1.189	0.933	2.000	0.128	0.832	71.8	6.5	K
424116	E 3	31.4	24.1	50.8	3.66	22.9	19.56	1.236	0.948	2.000	0.144	0.900	111.7	6.3	L
424216	E 3	31.0	22.9	50.8	4.06	26.4	30.75	1.220	0.900	2.000	0.160	1.040	175.6	6.5	M
424316	E 3	30.7	21.8	50.8	4.47	29.1	48.73	1.209	0.857	2.000	0.176	1.144	278.3	6.5	N
M607212	E 3	30.0	24.0	60.0	3.00	24.0	6.80	1.181	0.945	2.362	0.118	0.945	38.8	8.0	K
M607412	E 3	30.0	23.3	60.0	3.35	27.6	10.55	1.181	0.917	2.362	0.132	1.088	60.3	8.3	L
M607512	E 3	30.0	22.9	60.0	3.55	30.2	13.09	1.181	0.902	2.362	0.140	1.188	74.7	8.5	M
M607712	E 3	30.0	22.0	60.0	4.00	34.0	22.21	1.181	0.866	2.362	0.157	1.339	126.8	8.5	N
403820	E 3	30.4	25.1	63.5	2.64	19.8	4.11	1.197	0.989	2.500	0.104	0.780	23.4	7.5	H
403920	E 3	30.7	24.8	63.5	2.95	22.1	6.35	1.209	0.977	2.500	0.116	0.870	36.3	7.5	K
404020	E 3	30.2	23.7	63.5	3.25	25.2	9.84	1.189	0.933	2.500	0.128	0.992	56.2	7.8	L
424120	E 3	31.4	24.1	63.5	3.66	27.4	15.11	1.236	0.948	2.500	0.144	1.080	86.3	7.5	M
424220	E 3	31.0	22.9	63.5	4.06	31.5	24.06	1.220	0.900	2.500	0.160	1.240	137.4	7.8	N
424320	E 3	30.7	21.8	63.5	4.47	34.6	38.14	1.209	0.857	2.500	0.176	1.364	217.8	7.8	P
M607214	E 3	30.0	24.0	70.0	3.00	27.0	5.83	1.181	0.945	2.756	0.118	1.063	33.3	9.0	K
M607414	E 3	30.0	23.3	70.0	3.35	31.8	8.79	1.181	0.917	2.756	0.132	1.253	50.2	9.5	L
M607514	E 3	30.0	22.9	70.0	3.55	34.6	10.98	1.181	0.902	2.756	0.140	1.363	62.7	9.8	M
M607714	E 3	30.0	22.0	70.0	4.00	40.0	18.05	1.181	0.866	2.756	0.157	1.575	103.1	10.0	N
403824	E 3	30.4	25.1	76.2	2.64	23.1	3.35	1.197	0.989	3.000	0.104	0.910	19.1	8.8	J
403924	E 3	30.7	24.8	76.2	2.95	25.8	5.17	1.209	0.977	3.000	0.116	1.015	29.5	8.8	K
404024	E 3	30.2	23.7	76.2	3.25	28.4	8.38	1.189	0.933	3.000	0.128	1.120	47.9	8.8	L
424124	E 3	31.4	24.1	76.2	3.66	32.0	12.32	1.236	0.948	3.000	0.144	1.260	70.3	8.8	N
424224	E 3	31.0	22.9	76.2	4.06	36.6	19.77	1.220	0.900	3.000	0.160	1.440	112.9	9.0	P
424324	E 3	30.7	21.8	76.2	4.47	40.2	31.33	1.209	0.857	3.000	0.176	1.584	178.9	9.0	Q
M607216	E 3	30.0	24.0	80.0	3.00	30.8	4.94	1.181	0.945	3.150	0.118	1.211	28.2	10.3	K
M607416	E 3	30.0	23.3	80.0	3.35	36.0	7.54	1.181	0.917	3.150	0.132	1.418	43.0	10.8	M
M607516	E 3	30.0	22.9	80.0	3.55	39.1	9.45	1.181	0.902	3.150	0.140	1.537	54.0	11.0	M
M607716	E 3	30.0	22.0	80.0	4.00	45.0	15.61	1.181	0.866	3.150	0.157	1.772	89.1	11.3	P
403828	E 3	30.4	25.1	88.9	2.64	25.8	2.91	1.197	0.989	3.500	0.104	1.014	16.6	9.8	J
403928	E 3	30.7	24.8	88.9	2.95	28.7	4.51	1.209	0.977	3.500	0.116	1.131	25.7	9.8	L
404028	E 3	30.2	23.7	88.9	3.25	32.5	7.07	1.189	0.933	3.500	0.128	1.280	40.4	10.0	M
424128	E 3	31.4	24.1	88.9	3.66	35.7	10.73	1.236	0.948	3.500	0.144	1.404	61.2	9.8	N
424228	E 3	31.0	22.9	88.9	4.06	41.7	16.77	1.220	0.900	3.500	0.160	1.640	95.8	10.3	P
424328	E 3	30.7	21.8	88.9	4.47	45.8	26.58	1.209	0.857	3.500	0.176	1.804	151.8	10.3	Q
M607220	E 3	30.0	24.0	100.0	3.00	37.5	3.88	1.181	0.945	3.937	0.118	1.476	22.2	12.5	M
M607420	E 3	30.0	23.3	100.0	3.35	43.6	6.00	1.181	0.917	3.937	0.132	1.715	34.2	13.0	N
M607520	E 3	30.0	22.9	100.0	3.55	47.9	7.40	1.181	0.902	3.937	0.140	1.887	42.2	13.5	N
M607720	E 3	30.0	22.0	100.0	4.00	55.0	12.29	1.181	0.866	3.937	0.157	2.165	70.2	13.8	P
403832	E 3	30.4	25.1	101.6	2.64	29.1	2.51	1.197	0.989	4.000	0.104	1.144	14.3	11.0	K
403932	E 3	30.7	24.8	101.6	2.95	32.4	3.88	1.209	0.977	4.000	0.116	1.276	22.2	11.0	L
404032	E 3	30.2	23.7	101.6	3.25	36.6	6.12	1.189	0.933	4.000	0.128	1.440	34.9	11.3	M
424132	E 3	31.4	24.1	101.6	3.66	40.2	9.24	1.236	0.948	4.000	0.144	1.584	52.7	11.0	P
424232	E 3	31.0	22.9	101.6	4.06	45.7	14.96	1.220	0.900	4.000	0.160	1.800	85.4	11.3	Q
424332	E 3	30.7	21.8	101.6	4.47	51.4	23.08	1.209	0.857	4.000	0.176	2.024	131.8	11.5	R
M607224	E 3	30.0	24.0	120.0	3.00	44.3	3.20	1.181	0.945	4.724	0.118	1.742	18.3	14.8	M

For Sales or Assistance - Tel 0117 967 3313

All characteristics are nominal


Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	Lbs/in	approx	
M607424	E 3	30.0	23.3	120.0	3.35	51.9	4.89	1.181	0.917	4.724	0.132	2.044	27.9	15.5	N
M607524	E 3	30.0	22.9	120.0	3.55	55.9	6.19	1.181	0.902	4.724	0.140	2.201	35.3	15.8	P
M607724	E 3	30.0	22.0	120.0	4.00	66.0	9.96	1.181	0.866	4.724	0.157	2.598	56.9	16.5	R
403840	E 3	30.4	25.1	127.0	2.64	35.0	2.01	1.197	0.989	5.000	0.104	1.378	11.5	13.3	L
403940	E 3	30.7	24.8	127.0	2.95	39.0	3.10	1.209	0.977	5.000	0.116	1.537	17.7	13.3	M
404040	E 3	30.2	23.7	127.0	3.25	43.9	4.92	1.189	0.933	5.000	0.128	1.728	28.1	13.5	N
424140	E 3	31.4	24.1	127.0	3.66	48.5	7.39	1.236	0.948	5.000	0.144	1.908	42.2	13.3	Q
424240	E 3	31.0	22.9	127.0	4.06	55.9	11.77	1.220	0.900	5.000	0.160	2.200	67.2	13.8	R
424340	E 3	30.7	21.8	127.0	4.47	62.6	18.27	1.209	0.857	5.000	0.176	2.464	104.3	14.0	S
M607228	E 3	30.0	24.0	140.0	3.00	51.0	2.72	1.181	0.945	5.512	0.118	2.008	15.5	17.0	N
M607428	E 3	30.0	23.3	140.0	3.35	60.3	4.12	1.181	0.917	5.512	0.132	2.374	23.5	18.0	P
M607528	E 3	30.0	22.9	140.0	3.55	64.8	5.24	1.181	0.902	5.512	0.140	2.551	29.9	18.3	Q
M607728	E 3	30.0	22.0	140.0	4.00	76.0	8.49	1.181	0.866	5.512	0.157	2.992	48.5	19.0	R
403848	E 3	30.4	25.1	152.4	2.64	41.0	1.67	1.197	0.989	6.000	0.104	1.612	9.6	15.5	M
403948	E 3	30.7	24.8	152.4	2.95	45.7	2.59	1.209	0.977	6.000	0.116	1.798	14.8	15.5	N
404048	E 3	30.2	23.7	152.4	3.25	51.2	4.11	1.189	0.933	6.000	0.128	2.016	23.5	15.8	P
424148	E 3	31.4	24.1	152.4	3.66	56.7	6.16	1.236	0.948	6.000	0.144	2.232	35.2	15.5	Q
424248	E 3	31.0	22.9	152.4	4.06	66.0	9.71	1.220	0.900	6.000	0.160	2.600	55.4	16.3	S
424348	E 3	30.7	21.8	152.4	4.47	73.8	15.12	1.209	0.857	6.000	0.176	2.904	86.4	16.5	T
M607232	E 3	30.0	24.0	160.0	3.00	57.0	2.40	1.181	0.945	6.299	0.118	2.244	13.7	19.0	P
M607432	E 3	30.0	23.3	160.0	3.35	67.8	3.61	1.181	0.917	6.299	0.132	2.671	20.6	20.3	Q
M607532	E 3	30.0	22.9	160.0	3.55	73.7	4.54	1.181	0.902	6.299	0.140	2.900	25.9	20.8	Q
M607732	E 3	30.0	22.0	160.0	4.00	87.0	7.31	1.181	0.866	6.299	0.157	3.425	41.7	21.8	S
403856	E 3	30.4	25.1	177.8	2.64	46.9	1.43	1.197	0.989	7.000	0.104	1.846	8.2	17.8	N
403956	E 3	30.7	24.8	177.8	2.95	52.3	2.22	1.209	0.977	7.000	0.116	2.059	12.7	17.8	P
404056	E 3	30.2	23.7	177.8	3.25	59.3	3.48	1.189	0.933	7.000	0.128	2.336	19.9	18.3	Q
424156	E 3	31.4	24.1	177.8	3.66	65.8	5.20	1.236	0.948	7.000	0.144	2.592	29.7	18.0	R
424256	E 3	31.0	22.9	177.8	4.06	75.2	8.39	1.220	0.900	7.000	0.160	2.960	47.9	18.5	T
424356	E 3	30.7	21.8	177.8	4.47	84.9	12.90	1.209	0.857	7.000	0.176	3.344	73.7	19.0	U
M607236	E 3	30.0	24.0	180.0	3.00	63.8	2.12	1.181	0.945	7.087	0.118	2.510	12.1	21.3	P
M607436	E 3	30.0	23.3	180.0	3.35	76.2	3.18	1.181	0.917	7.087	0.132	3.000	18.2	22.8	Q
M607536	E 3	30.0	22.9	180.0	3.55	82.5	4.00	1.181	0.902	7.087	0.140	3.250	22.9	23.3	R
M607736	E 3	30.0	22.0	180.0	4.00	97.0	6.49	1.181	0.866	7.087	0.157	3.819	37.1	24.3	T
424164	E 3	31.4	24.1	203.2	3.66	74.1	4.55	1.236	0.948	8.000	0.144	2.916	26.0	20.3	S
424264	E 3	31.0	22.9	203.2	4.06	85.3	7.28	1.220	0.900	8.000	0.160	3.360	41.6	21.0	T
424364	E 3	30.7	21.8	203.2	4.47	96.1	11.25	1.209	0.857	8.000	0.176	3.784	64.2	21.5	V
423812	E 4	32.0	26.7	38.1	2.64	13.9	5.87	1.260	1.052	1.500	0.104	0.546	33.5	5.3	H
423912	E 4	32.3	26.4	38.1	2.95	15.5	9.08	1.272	1.040	1.500	0.116	0.609	51.9	5.3	J
424012	E 4	31.8	25.3	38.1	3.25	17.1	14.64	1.252	0.996	1.500	0.128	0.672	83.6	5.3	J
444112	E 4	33.0	25.7	38.1	3.66	18.3	23.42	1.299	1.011	1.500	0.144	0.720	133.7	5.0	L
444212	E 4	32.6	24.5	38.1	4.06	20.3	38.79	1.283	0.963	1.500	0.160	0.800	221.5	5.0	M
444312	E 4	32.2	23.3	38.1	4.47	23.5	57.11	1.268	0.916	1.500	0.176	0.924	326.1	5.3	N
423814	E 4	32.0	26.7	44.5	2.64	15.2	5.09	1.260	1.052	1.750	0.104	0.598	29.1	5.8	H
423914	E 4	32.3	26.4	44.5	2.95	16.9	7.87	1.272	1.040	1.750	0.116	0.667	44.9	5.8	J
424014	E 4	31.8	25.3	44.5	3.25	18.7	12.69	1.252	0.996	1.750	0.128	0.736	72.5	5.8	K
444114	E 4	33.0	25.7	44.5	3.66	20.1	20.07	1.299	1.011	1.750	0.144	0.792	114.6	5.5	L
444214	E 4	32.6	24.5	44.5	4.06	23.4	31.03	1.283	0.963	1.750	0.160	0.920	177.2	5.8	M
444314	E 4	32.2	23.3	44.5	4.47	25.7	49.49	1.268	0.916	1.750	0.176	1.012	282.6	5.8	N
423816	E 4	32.0	26.7	50.8	2.64	16.5	4.49	1.260	1.052	2.000	0.104	0.650	25.6	6.3	H
423916	E 4	32.3	26.4	50.8	2.95	18.4	6.95	1.272	1.040	2.000	0.116	0.725	39.7	6.3	J
424016	E 4	31.8	25.3	50.8	3.25	20.3	11.20	1.252	0.996	2.000	0.128	0.800	63.9	6.3	K

Choose from millions of sizes - www.flexosprings.com

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	Lbs/in	approx	
444116	E 4	33.0	25.7	50.8	3.66	21.9	17.56	1.299	1.011	2.000	0.144	0.864	100.3	6.0	L
444216	E 4	32.6	24.5	50.8	4.06	25.4	27.38	1.283	0.963	2.000	0.160	1.000	156.3	6.3	M
444316	E 4	32.2	23.3	50.8	4.47	27.9	43.67	1.268	0.916	2.000	0.176	1.100	249.4	6.3	N
423820	E 4	32.0	26.7	63.5	2.64	19.2	3.64	1.260	1.052	2.500	0.104	0.754	20.8	7.3	H
423920	E 4	32.3	26.4	63.5	2.95	21.4	5.62	1.272	1.040	2.500	0.116	0.841	32.1	7.3	K
424020	E 4	31.8	25.3	63.5	3.25	24.4	8.65	1.252	0.996	2.500	0.128	0.960	49.4	7.5	L
444120	E 4	33.0	25.7	63.5	3.66	26.5	13.38	1.299	1.011	2.500	0.144	1.044	76.4	7.3	M
444220	E 4	32.6	24.5	63.5	4.06	29.5	22.16	1.283	0.963	2.500	0.160	1.160	126.6	7.3	N
444320	E 4	32.2	23.3	63.5	4.47	33.5	33.74	1.268	0.916	2.500	0.176	1.320	192.7	7.5	P
423824	E 4	32.0	26.7	76.2	2.64	22.5	2.94	1.260	1.052	3.000	0.104	0.884	16.8	8.5	J
423924	E 4	32.3	26.4	76.2	2.95	25.0	4.54	1.272	1.040	3.000	0.116	0.986	25.9	8.5	K
424024	E 4	31.8	25.3	76.2	3.25	27.6	7.32	1.252	0.996	3.000	0.128	1.088	41.8	8.5	L
444124	E 4	33.0	25.7	76.2	3.66	30.2	11.24	1.299	1.011	3.000	0.144	1.188	64.2	8.3	N
444224	E 4	32.6	24.5	76.2	4.06	33.5	18.62	1.283	0.963	3.000	0.160	1.320	106.3	8.3	P
444324	E 4	32.2	23.3	76.2	4.47	38.0	28.55	1.268	0.916	3.000	0.176	1.496	163.0	8.5	Q
423828	E 4	32.0	26.7	88.9	2.64	25.1	2.54	1.260	1.052	3.500	0.104	0.988	14.5	9.5	J
423928	E 4	32.3	26.4	88.9	2.95	28.0	3.94	1.272	1.040	3.500	0.116	1.102	22.5	9.5	L
424028	E 4	31.8	25.3	88.9	3.25	31.7	6.14	1.252	0.996	3.500	0.128	1.248	35.1	9.8	M
444128	E 4	33.0	25.7	88.9	3.66	34.8	9.37	1.299	1.011	3.500	0.144	1.368	53.5	9.5	N
444228	E 4	32.6	24.5	88.9	4.06	38.6	15.52	1.283	0.963	3.500	0.160	1.520	88.6	9.5	P
444328	E 4	32.2	23.3	88.9	4.47	43.6	23.95	1.268	0.916	3.500	0.176	1.716	136.7	9.8	Q
423832	E 4	32.0	26.7	101.6	2.64	28.4	2.18	1.260	1.052	4.000	0.104	1.118	12.5	10.8	K
423932	E 4	32.3	26.4	101.6	2.95	31.7	3.37	1.272	1.040	4.000	0.116	1.247	19.3	10.8	L
424032	E 4	31.8	25.3	101.6	3.25	34.9	5.44	1.252	0.996	4.000	0.128	1.376	31.1	10.8	M
444132	E 4	33.0	25.7	101.6	3.66	38.4	8.27	1.299	1.011	4.000	0.144	1.512	47.2	10.5	P
444232	E 4	32.6	24.5	101.6	4.06	42.7	13.69	1.283	0.963	4.000	0.160	1.680	78.2	10.5	Q
444332	E 4	32.2	23.3	101.6	4.47	48.1	21.21	1.268	0.916	4.000	0.176	1.892	121.1	10.8	R
423840	E 4	32.0	26.7	127.0	2.64	33.7	1.78	1.260	1.052	5.000	0.104	1.326	10.1	12.8	L
423940	E 4	32.3	26.4	127.0	2.95	37.6	2.75	1.272	1.040	5.000	0.116	1.479	15.7	12.8	M
424040	E 4	31.8	25.3	127.0	3.25	42.3	4.33	1.252	0.996	5.000	0.128	1.664	24.7	13.0	N
444140	E 4	33.0	25.7	127.0	3.66	45.7	6.69	1.299	1.011	5.000	0.144	1.800	38.2	12.5	Q
444240	E 4	32.6	24.5	127.0	4.06	51.8	10.82	1.283	0.963	5.000	0.160	2.040	61.8	12.8	R
444340	E 4	32.2	23.3	127.0	4.47	59.2	16.50	1.268	0.916	5.000	0.176	2.332	94.2	13.3	S
423848	E 4	32.0	26.7	152.4	2.64	39.6	1.47	1.260	1.052	6.000	0.104	1.560	8.4	15.0	M
423948	E 4	32.3	26.4	152.4	2.95	44.2	2.27	1.272	1.040	6.000	0.116	1.740	13.0	15.0	N
424048	E 4	31.8	25.3	152.4	3.25	49.6	3.59	1.252	0.996	6.000	0.128	1.952	20.5	15.3	P
444148	E 4	33.0	25.7	152.4	3.66	54.0	5.51	1.299	1.011	6.000	0.144	2.124	31.5	14.8	Q
444248	E 4	32.6	24.5	152.4	4.06	61.0	8.95	1.283	0.963	6.000	0.160	2.400	51.1	15.0	S
444348	E 4	32.2	23.3	152.4	4.47	69.3	13.75	1.268	0.916	6.000	0.176	2.728	78.5	15.5	T
423856	E 4	32.0	26.7	177.8	2.64	45.6	1.25	1.260	1.052	7.000	0.104	1.794	7.1	17.3	N
423956	E 4	32.3	26.4	177.8	2.95	50.8	1.94	1.272	1.040	7.000	0.116	2.001	11.1	17.3	P
424056	E 4	31.8	25.3	177.8	3.25	56.9	3.07	1.252	0.996	7.000	0.128	2.240	17.5	17.5	Q
444156	E 4	33.0	25.7	177.8	3.66	62.2	4.68	1.299	1.011	7.000	0.144	2.448	26.7	17.0	R
444256	E 4	32.6	24.5	177.8	4.06	70.1	7.63	1.283	0.963	7.000	0.160	2.760	43.6	17.3	T
444356	E 4	32.2	23.3	177.8	4.47	79.3	11.78	1.268	0.916	7.000	0.176	3.124	67.3	17.8	U
423864	E 4	32.0	26.7	203.2	2.64	51.5	1.09	1.260	1.052	8.000	0.104	2.028	6.2	19.5	N
423964	E 4	32.3	26.4	203.2	2.95	57.4	1.69	1.272	1.040	8.000	0.116	2.262	9.6	19.5	P
424064	E 4	31.8	25.3	203.2	3.25	64.2	2.68	1.252	0.996	8.000	0.128	2.528	15.3	19.8	Q
444164	E 4	33.0	25.7	203.2	3.66	70.4	4.07	1.299	1.011	8.000	0.144	2.772	23.3	19.3	S
444264	E 4	32.6	24.5	203.2	4.06	79.2	6.65	1.283	0.963	8.000	0.160	3.120	38.0	19.5	T
444364	E 4	32.2	23.3	203.2	4.47	89.4	10.31	1.268	0.916	8.000	0.176	3.520	58.9	20.0	V

For Sales or Assistance - Tel 0117 967 3313

All characteristics are nominal

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	lbs/in		
443912	E 5	33.9	28.0	38.1	2.95	14.7	8.39	1.335	1.103	1.500	0.116	0.580	47.9	5.0	J
444012	E 5	33.4	26.9	38.1	3.25	15.4	14.69	1.315	1.059	1.500	0.128	0.608	83.9	4.8	J
464112	E 5	34.6	27.3	38.1	3.66	17.4	21.79	1.362	1.074	1.500	0.144	0.684	124.4	4.8	L
464212	E 5	34.2	26.1	38.1	4.06	20.3	32.93	1.346	1.026	1.500	0.160	0.800	188.0	5.0	M
464312	E 5	33.8	24.9	38.1	4.47	22.4	52.28	1.331	0.979	1.500	0.176	0.880	298.5	5.0	N
443914	E 5	33.9	28.0	44.5	2.95	16.2	7.19	1.335	1.103	1.750	0.116	0.638	41.1	5.5	J
444014	E 5	33.4	26.9	44.5	3.25	17.9	11.54	1.315	1.059	1.750	0.128	0.704	65.9	5.5	K
464114	E 5	34.6	27.3	44.5	3.66	19.2	18.43	1.362	1.074	1.750	0.144	0.756	105.3	5.3	L
464214	E 5	34.2	26.1	44.5	4.06	22.4	28.23	1.346	1.026	1.750	0.160	0.880	161.2	5.5	M
464314	E 5	33.8	24.9	44.5	4.47	24.6	44.81	1.331	0.979	1.750	0.176	0.968	255.9	5.5	N
443916	E 5	33.9	28.0	50.8	2.95	17.7	6.29	1.335	1.103	2.000	0.116	0.696	35.9	6.0	J
444016	E 5	33.4	26.9	50.8	3.25	19.5	10.10	1.315	1.059	2.000	0.128	0.768	57.7	6.0	K
464116	E 5	34.6	27.3	50.8	3.66	21.9	14.98	1.362	1.074	2.000	0.144	0.864	85.5	6.0	L
464216	E 5	34.2	26.1	50.8	4.06	24.4	24.70	1.346	1.026	2.000	0.160	0.960	141.0	6.0	M
464316	E 5	33.8	24.9	50.8	4.47	26.8	39.21	1.331	0.979	2.000	0.176	1.056	223.9	6.0	N
443920	E 5	33.9	28.0	63.5	2.95	20.6	5.03	1.335	1.103	2.500	0.116	0.812	28.7	7.0	K
444020	E 5	33.4	26.9	63.5	3.25	22.8	8.08	1.315	1.059	2.500	0.128	0.896	46.1	7.0	L
464120	E 5	34.6	27.3	63.5	3.66	25.6	11.98	1.362	1.074	2.500	0.144	1.008	68.4	7.0	M
464220	E 5	34.2	26.1	63.5	4.06	28.4	19.76	1.346	1.026	2.500	0.160	1.120	112.8	7.0	N
464320	E 5	33.8	24.9	63.5	4.47	32.4	29.88	1.331	0.979	2.500	0.176	1.276	170.6	7.3	P
443924	E 5	33.9	28.0	76.2	2.95	24.3	4.03	1.335	1.103	3.000	0.116	0.957	23.0	8.3	K
444024	E 5	33.4	26.9	76.2	3.25	26.0	6.73	1.315	1.059	3.000	0.128	1.024	38.5	8.0	L
464124	E 5	34.6	27.3	76.2	3.66	29.3	9.99	1.362	1.074	3.000	0.144	1.152	57.0	8.0	N
464224	E 5	34.2	26.1	76.2	4.06	32.5	16.47	1.346	1.026	3.000	0.160	1.280	94.0	8.0	P
464324	E 5	33.8	24.9	76.2	4.47	36.9	25.10	1.331	0.979	3.000	0.176	1.452	143.3	8.3	Q
443928	E 5	33.9	28.0	88.9	2.95	27.3	3.47	1.335	1.103	3.500	0.116	1.073	19.8	9.3	L
444028	E 5	33.4	26.9	88.9	3.25	30.1	5.57	1.315	1.059	3.500	0.128	1.184	31.8	9.3	M
464128	E 5	34.6	27.3	88.9	3.66	32.9	8.56	1.362	1.074	3.500	0.144	1.296	48.9	9.0	N
464228	E 5	34.2	26.1	88.9	4.06	36.6	14.11	1.346	1.026	3.500	0.160	1.440	80.6	9.0	P
464328	E 5	33.8	24.9	88.9	4.47	41.3	21.63	1.331	0.979	3.500	0.176	1.628	123.5	9.3	Q
443932	E 5	33.9	28.0	101.6	2.95	30.2	3.05	1.335	1.103	4.000	0.116	1.189	17.4	10.3	L
444032	E 5	33.4	26.9	101.6	3.25	33.3	4.90	1.315	1.059	4.000	0.128	1.312	28.0	10.3	M
464132	E 5	34.6	27.3	101.6	3.66	36.6	7.49	1.362	1.074	4.000	0.144	1.440	42.8	10.0	P
464232	E 5	34.2	26.1	101.6	4.06	41.7	11.98	1.346	1.026	4.000	0.160	1.640	68.4	10.3	Q
464332	E 5	33.8	24.9	101.6	4.47	46.9	18.45	1.331	0.979	4.000	0.176	1.848	105.4	10.5	R
443940	E 5	33.9	28.0	127.0	2.95	36.1	2.46	1.335	1.103	5.000	0.116	1.421	14.0	12.3	M
444040	E 5	33.4	26.9	127.0	3.25	39.8	3.94	1.315	1.059	5.000	0.128	1.568	22.5	12.3	N
464140	E 5	34.6	27.3	127.0	3.66	43.9	5.99	1.362	1.074	5.000	0.144	1.728	34.2	12.0	Q
464240	E 5	34.2	26.1	127.0	4.06	49.8	9.64	1.346	1.026	5.000	0.160	1.960	55.0	12.3	R
464340	E 5	33.8	24.9	127.0	4.47	55.9	14.94	1.331	0.979	5.000	0.176	2.200	85.3	12.5	S
443948	E 5	33.9	28.0	152.4	2.95	42.7	2.01	1.335	1.103	6.000	0.116	1.682	11.5	14.5	N
444048	E 5	33.4	26.9	152.4	3.25	47.1	3.23	1.315	1.059	6.000	0.128	1.856	18.5	14.5	P
464148	E 5	34.6	27.3	152.4	3.66	52.1	4.89	1.362	1.074	6.000	0.144	2.052	27.9	14.3	Q
464248	E 5	34.2	26.1	152.4	4.06	58.9	7.90	1.346	1.026	6.000	0.160	2.320	45.1	14.5	S
464348	E 5	33.8	24.9	152.4	4.47	65.9	12.30	1.331	0.979	6.000	0.176	2.596	70.2	14.8	T
443956	E 5	33.9	28.0	177.8	2.95	48.6	1.74	1.335	1.103	7.000	0.116	1.914	9.9	16.5	P
444056	E 5	33.4	26.9	177.8	3.25	53.6	2.79	1.315	1.059	7.000	0.128	2.112	15.9	16.5	Q
464156	E 5	34.6	27.3	177.8	3.66	59.4	4.20	1.362	1.074	7.000	0.144	2.340	24.0	16.3	R
464256	E 5	34.2	26.1	177.8	4.06	67.1	6.81	1.346	1.026	7.000	0.160	2.640	38.9	16.5	T
464356	E 5	33.8	24.9	177.8	4.47	76.0	10.46	1.331	0.979	7.000	0.176	2.992	59.7	17.0	U
443964	E 5	33.9	28.0	203.2	2.95	55.2	1.50	1.335	1.103	8.000	0.116	2.175	8.6	18.8	P

Choose from millions of sizes - www.flexosprings.com

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	Lbs/in	approx	
444064	E 5	33.4	26.9	203.2	3.25	61.0	2.41	1.315	1.059	8.000	0.128	2.400	13.8	18.8	Q
464164	E 5	34.6	27.3	203.2	3.66	66.8	3.69	1.362	1.074	8.000	0.144	2.628	21.1	18.3	S
464264	E 5	34.2	26.1	203.2	4.06	75.2	5.99	1.346	1.026	8.000	0.160	2.960	34.2	18.5	T
464364	E 5	33.8	24.9	203.2	4.47	84.9	9.23	1.331	0.979	8.000	0.176	3.344	52.7	19.0	V
464012	E 6	35.0	28.5	38.1	3.25	15.4	12.58	1.378	1.122	1.500	0.128	0.608	71.8	4.8	J
484112	E 6	36.2	28.9	38.1	3.66	17.4	18.73	1.425	1.137	1.500	0.144	0.684	106.9	4.8	L
484212	E 6	35.8	27.7	38.1	4.06	19.3	30.76	1.409	1.089	1.500	0.160	0.760	175.6	4.8	M
484312	E 6	35.4	26.5	38.1	4.47	21.2	48.63	1.394	1.042	1.500	0.176	0.836	277.7	4.8	N
464014	E 6	35.0	28.5	44.5	3.25	17.1	10.65	1.378	1.122	1.750	0.128	0.672	60.8	5.3	K
484114	E 6	36.2	28.9	44.5	3.66	19.2	15.85	1.425	1.137	1.750	0.144	0.756	90.5	5.3	L
484214	E 6	35.8	27.7	44.5	4.06	21.3	26.03	1.409	1.089	1.750	0.160	0.840	148.6	5.3	M
484314	E 6	35.4	26.5	44.5	4.47	23.5	41.15	1.394	1.042	1.750	0.176	0.924	235.0	5.3	N
464016	E 6	35.0	28.5	50.8	3.25	18.7	9.23	1.378	1.122	2.000	0.128	0.736	52.7	5.8	K
484116	E 6	36.2	28.9	50.8	3.66	21.0	13.73	1.425	1.137	2.000	0.144	0.828	78.4	5.8	L
484216	E 6	35.8	27.7	50.8	4.06	23.4	22.56	1.409	1.089	2.000	0.160	0.920	128.8	5.8	M
484316	E 6	35.4	26.5	50.8	4.47	25.7	35.67	1.394	1.042	2.000	0.176	1.012	203.6	5.8	N
464020	E 6	35.0	28.5	63.5	3.25	21.9	7.28	1.378	1.122	2.500	0.128	0.864	41.6	6.8	L
484120	E 6	36.2	28.9	63.5	3.66	24.7	10.84	1.425	1.137	2.500	0.144	0.972	61.9	6.8	M
484220	E 6	35.8	27.7	63.5	4.06	27.4	17.81	1.409	1.089	2.500	0.160	1.080	101.7	6.8	N
484320	E 6	35.4	26.5	63.5	4.47	30.2	28.16	1.394	1.042	2.500	0.176	1.188	160.8	6.8	P
464024	E 6	35.0	28.5	76.2	3.25	25.2	6.02	1.378	1.122	3.000	0.128	0.992	34.4	7.8	L
484124	E 6	36.2	28.9	76.2	3.66	28.3	8.96	1.425	1.137	3.000	0.144	1.116	51.1	7.8	N
484224	E 6	35.8	27.7	76.2	4.06	31.5	14.71	1.409	1.089	3.000	0.160	1.240	84.0	7.8	P
484324	E 6	35.4	26.5	76.2	4.47	34.6	23.26	1.394	1.042	3.000	0.176	1.364	132.8	7.8	Q
464028	E 6	35.0	28.5	88.9	3.25	29.3	4.94	1.378	1.122	3.500	0.128	1.152	28.2	9.0	M
484128	E 6	36.2	28.9	88.9	3.66	31.1	7.92	1.425	1.137	3.500	0.144	1.224	45.2	8.5	N
484228	E 6	35.8	27.7	88.9	4.06	35.6	12.53	1.409	1.089	3.500	0.160	1.400	71.6	8.8	P
484328	E 6	35.4	26.5	88.9	4.47	40.2	19.11	1.394	1.042	3.500	0.176	1.584	109.1	9.0	Q
464032	E 6	35.0	28.5	101.6	3.25	32.5	4.32	1.378	1.122	4.000	0.128	1.280	24.7	10.0	M
484132	E 6	36.2	28.9	101.6	3.66	34.8	6.87	1.425	1.137	4.000	0.144	1.368	39.2	9.5	P
484232	E 6	35.8	27.7	101.6	4.06	39.6	10.92	1.409	1.089	4.000	0.160	1.560	62.3	9.8	Q
484332	E 6	35.4	26.5	101.6	4.47	44.7	16.72	1.394	1.042	4.000	0.176	1.760	95.5	10.0	R
464040	E 6	35.0	28.5	127.0	3.25	39.0	3.46	1.378	1.122	5.000	0.128	1.536	19.8	12.0	N
484140	E 6	36.2	28.9	127.0	3.66	42.1	5.42	1.425	1.137	5.000	0.144	1.656	31.0	11.5	Q
484240	E 6	35.8	27.7	127.0	4.06	47.8	8.68	1.409	1.089	5.000	0.160	1.880	49.5	11.8	R
484340	E 6	35.4	26.5	127.0	4.47	53.6	13.37	1.394	1.042	5.000	0.176	2.112	76.4	12.0	S
464048	E 6	35.0	28.5	152.4	3.25	45.5	2.88	1.378	1.122	6.000	0.128	1.792	16.5	14.0	P
484148	E 6	36.2	28.9	152.4	3.66	49.4	4.48	1.425	1.137	6.000	0.144	1.944	25.6	13.5	Q
484248	E 6	35.8	27.7	152.4	4.06	55.9	7.20	1.409	1.089	6.000	0.160	2.200	41.1	13.8	S
484348	E 6	35.4	26.5	152.4	4.47	62.6	11.15	1.394	1.042	6.000	0.176	2.464	63.6	14.0	T
464056	E 6	35.0	28.5	177.8	3.25	52.0	2.47	1.378	1.122	7.000	0.128	2.048	14.1	16.0	Q
484156	E 6	36.2	28.9	177.8	3.66	56.7	3.81	1.425	1.137	7.000	0.144	2.232	21.8	15.5	R
484256	E 6	35.8	27.7	177.8	4.06	64.0	6.15	1.409	1.089	7.000	0.160	2.520	35.1	15.8	T
484356	E 6	35.4	26.5	177.8	4.47	71.5	9.55	1.394	1.042	7.000	0.176	2.816	54.5	16.0	U
464064	E 6	35.0	28.5	203.2	3.25	58.5	2.16	1.378	1.122	8.000	0.128	2.304	12.3	18.0	Q
484164	E 6	36.2	28.9	203.2	3.66	63.1	3.38	1.425	1.137	8.000	0.144	2.484	19.3	17.3	S
484264	E 6	35.8	27.7	203.2	4.06	72.1	5.37	1.409	1.089	8.000	0.160	2.840	30.7	17.8	T
484364	E 6	35.4	26.5	203.2	4.47	80.5	8.36	1.394	1.042	8.000	0.176	3.168	47.7	18.0	V
484012	E 7	36.6	30.1	38.1	3.25	15.4	10.86	1.441	1.185	1.500	0.128	0.608	62.0	4.8	J
484014	E 7	36.6	30.1	44.5	3.25	17.1	9.19	1.441	1.185	1.750	0.128	0.672	52.5	5.3	K
504314	E 7	37.3	28.4	44.5	4.47	23.5	34.41	1.469	1.117	1.750	0.176	0.924	196.5	5.3	N

For Sales or Assistance - Tel 0117 967 3313

All characteristics are nominal

Compression Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						No of Coils	PRICE SAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Solid Lth.	Rate		
		mm	mm	mm	mm	mm	N/mm	inches	inches	inches	inches	inches	Lbs/in	approx	
484016	E 7	36.6	30.1	50.8	3.25	18.7	7.96	1.441	1.185	2.000	0.128	0.736	45.5	5.8	K
504316	E 7	37.3	28.4	50.8	4.47	25.7	29.82	1.469	1.117	2.000	0.176	1.012	170.3	5.8	N
484020	E 7	36.6	30.1	63.5	3.25	21.1	6.63	1.441	1.185	2.500	0.128	0.832	37.9	6.5	L
504320	E 7	37.3	28.4	63.5	4.47	29.1	24.85	1.469	1.117	2.500	0.176	1.144	141.9	6.5	P
484024	E 7	36.6	30.1	76.2	3.25	24.4	5.43	1.441	1.185	3.000	0.128	0.960	31.0	7.5	L
504324	E 7	37.3	28.4	76.2	4.47	33.5	20.33	1.469	1.117	3.000	0.176	1.320	116.1	7.5	Q
484028	E 7	36.6	30.1	88.9	3.25	27.6	4.59	1.441	1.185	3.500	0.128	1.088	26.2	8.5	M
504328	E 7	37.3	28.4	88.9	4.47	38.0	17.21	1.469	1.117	3.500	0.176	1.496	98.2	8.5	Q
484032	E 7	36.6	30.1	101.6	3.25	30.9	3.98	1.441	1.185	4.000	0.128	1.216	22.7	9.5	M
504332	E 7	37.3	28.4	101.6	4.47	42.5	14.91	1.469	1.117	4.000	0.176	1.672	85.1	9.5	R
484040	E 7	36.6	30.1	127.0	3.25	36.6	3.23	1.441	1.185	5.000	0.128	1.440	18.4	11.3	N
504340	E 7	37.3	28.4	127.0	4.47	51.4	11.77	1.469	1.117	5.000	0.176	2.024	67.2	11.5	S
484048	E 7	36.6	30.1	152.4	3.25	43.1	2.65	1.441	1.185	6.000	0.128	1.696	15.2	13.3	P
504348	E 7	37.3	28.4	152.4	4.47	60.3	9.73	1.469	1.117	6.000	0.176	2.376	55.5	13.5	T
484056	E 7	36.6	30.1	177.8	3.25	49.6	2.25	1.441	1.185	7.000	0.128	1.952	12.9	15.3	Q
504356	E 7	37.3	28.4	177.8	4.47	69.3	8.28	1.469	1.117	7.000	0.176	2.728	47.3	15.5	U
484064	E 7	36.6	30.1	203.2	3.25	55.3	1.99	1.441	1.185	8.000	0.128	2.176	11.4	17.0	Q
504364	E 7	37.3	28.4	203.2	4.47	77.1	7.33	1.469	1.117	8.000	0.176	3.036	41.9	17.3	V
504372	E 7	37.3	28.4	228.6	4.47	86.0	6.48	1.469	1.117	9.000	0.176	3.388	37.0	19.3	W

Choose from millions of sizes - www.flexosprings.com



Extension Springs

Extension Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						PRICE BAND
		Outside Dia.	Free Lth.	Wire Size	Extended Lth.	Initial Tension	Rate	Outside Dia.	Free Lth.	Wire Size	Extended Lth.	Initial Tension	Rate	
		mm	mm	mm	mm	N	N/mm	inches	inches	inches	inches	lbs	lbs/in	
AC 2104	A 5	2.9	12.7	0.35	24.4	0.66	0.40	0.115	0.500	0.014	0.961	0.15	2.26	E
AC 2204	A 5	2.9	12.7	0.38	22.1	0.83	0.62	0.115	0.500	0.015	0.869	0.19	3.56	E
AC 2304	A 5	2.9	12.7	0.42	19.7	1.09	1.09	0.115	0.500	0.016	0.776	0.24	6.21	E
MD 3703	A 5	3.0	15.0	0.40	25.9	0.96	0.61	0.118	0.591	0.016	1.021	0.22	3.51	E
AC 2105	A 5	2.9	15.9	0.35	32.7	0.66	0.27	0.115	0.625	0.014	1.289	0.15	1.57	E
AC 2205	A 5	2.9	15.9	0.38	29.3	0.83	0.43	0.115	0.625	0.015	1.155	0.19	2.48	E
AC 2305	A 5	2.9	15.9	0.42	25.9	1.09	0.76	0.115	0.625	0.016	1.021	0.24	4.32	E
AC 2106	A 5	2.9	19.1	0.35	41.1	0.66	0.21	0.115	0.750	0.014	1.617	0.15	1.20	E
AC 2206	A 5	2.9	19.1	0.38	36.6	0.83	0.33	0.115	0.750	0.015	1.442	0.19	1.90	E
AC 2306	A 5	2.9	19.1	0.42	32.2	1.09	0.58	0.115	0.750	0.016	1.266	0.24	3.32	E
MD 3704	A 5	3.0	20.0	0.40	36.8	0.96	0.40	0.118	0.787	0.016	1.447	0.22	2.29	E
AC 2107	A 5	2.9	22.2	0.35	49.4	0.66	0.17	0.115	0.875	0.014	1.945	0.15	0.97	E
AC 2207	A 5	2.9	22.2	0.38	43.9	0.83	0.27	0.115	0.875	0.015	1.729	0.19	1.54	E
AC 2307	A 5	2.9	22.2	0.42	38.4	1.09	0.47	0.115	0.875	0.016	1.512	0.24	2.69	E
MD 3705	A 5	3.0	25.0	0.40	47.6	0.96	0.30	0.118	0.984	0.016	1.873	0.22	1.70	E
AC 2108	A 5	2.9	25.4	0.35	57.7	0.66	0.14	0.115	1.000	0.014	2.273	0.15	0.82	E
AC 2208	A 5	2.9	25.4	0.38	51.2	0.83	0.23	0.115	1.000	0.015	2.016	0.19	1.29	E
AC 2308	A 5	2.9	25.4	0.42	44.6	1.09	0.40	0.115	1.000	0.016	1.757	0.24	2.26	E
MD 3706	A 5	3.0	30.0	0.40	58.4	0.96	0.24	0.118	1.181	0.016	2.299	0.22	1.35	E
AC 2110	A 5	2.9	31.8	0.35	74.4	0.66	0.11	0.115	1.250	0.014	2.930	0.15	0.62	E
AC 2210	A 5	2.9	31.8	0.38	65.8	0.83	0.17	0.115	1.250	0.015	2.589	0.19	0.98	E
AC 2310	A 5	2.9	31.8	0.42	57.1	1.09	0.30	0.115	1.250	0.016	2.247	0.24	1.72	E
MD 3707	A 5	3.0	35.0	0.40	69.2	0.96	0.20	0.118	1.378	0.016	2.725	0.22	1.12	E
AC 2112	A 5	2.9	38.1	0.35	91.1	0.66	0.09	0.115	1.500	0.014	3.586	0.15	0.50	E
AC 2212	A 5	2.9	38.1	0.38	80.3	0.83	0.14	0.115	1.500	0.015	3.163	0.19	0.79	E
AC 2312	A 5	2.9	38.1	0.42	69.5	1.09	0.24	0.115	1.500	0.016	2.738	0.24	1.38	E
MD 3708	A 5	3.0	40.0	0.40	80.0	0.96	0.17	0.118	1.575	0.016	3.151	0.22	0.96	E
MD 3710	A 5	3.0	50.0	0.40	101.7	0.96	0.13	0.118	1.969	0.016	4.003	0.22	0.74	F
AD 2204	A 6	3.2	12.7	0.38	23.4	0.77	0.50	0.125	0.500	0.015	0.922	0.17	2.88	E
AD 2304	A 6	3.2	12.7	0.42	20.8	1.01	0.88	0.125	0.500	0.016	0.818	0.23	5.00	E
AD 2404	A 6	3.2	12.7	0.46	19.0	1.31	1.45	0.125	0.500	0.018	0.749	0.29	8.27	E
AD 2504	A 6	3.2	12.7	0.51	17.4	1.75	2.58	0.125	0.500	0.020	0.687	0.39	14.72	E
AD 2205	A 6	3.2	15.9	0.38	31.7	0.77	0.34	0.125	0.625	0.015	1.246	0.17	1.96	E
AD 2305	A 6	3.2	15.9	0.42	27.7	1.01	0.60	0.125	0.625	0.016	1.092	0.23	3.40	E
AD 2405	A 6	3.2	15.9	0.46	25.2	1.31	0.99	0.125	0.625	0.018	0.991	0.29	5.64	E
AD 2505	A 6	3.2	15.9	0.51	22.8	1.75	1.76	0.125	0.625	0.020	0.898	0.39	10.06	E
AD 2206	A 6	3.2	19.1	0.38	39.9	0.77	0.26	0.125	0.750	0.015	1.571	0.17	1.48	E
AD 2306	A 6	3.2	19.1	0.42	34.7	1.01	0.45	0.125	0.750	0.016	1.366	0.23	2.58	E
AD 2406	A 6	3.2	19.1	0.46	31.3	1.31	0.75	0.125	0.750	0.018	1.232	0.29	4.28	E
AD 2506	A 6	3.2	19.1	0.51	28.2	1.75	1.34	0.125	0.750	0.020	1.110	0.39	7.64	E
AD 2208	A 6	3.2	25.4	0.38	56.4	0.77	0.17	0.125	1.000	0.015	2.219	0.17	1.00	E
AD 2308	A 6	3.2	25.4	0.42	48.6	1.01	0.30	0.125	1.000	0.016	1.914	0.23	1.74	E
AD 2408	A 6	3.2	25.4	0.46	43.6	1.31	0.51	0.125	1.000	0.018	1.715	0.29	2.89	E
AD 2508	A 6	3.2	25.4	0.51	38.9	1.75	0.90	0.125	1.000	0.020	1.532	0.39	5.16	E
AD 2210	A 6	3.2	31.8	0.38	72.8	0.77	0.13	0.125	1.250	0.015	2.868	0.17	0.75	E
AD 2310	A 6	3.2	31.8	0.42	62.5	1.01	0.23	0.125	1.250	0.016	2.462	0.23	1.31	E
AD 2410	A 6	3.2	31.8	0.46	55.8	1.31	0.38	0.125	1.250	0.018	2.197	0.29	2.18	E
AD 2510	A 6	3.2	31.8	0.51	49.7	1.75	0.68	0.125	1.250	0.020	1.955	0.39	3.90	E
AD 2212	A 6	3.2	38.1	0.38	89.3	0.77	0.11	0.125	1.500	0.015	3.516	0.17	0.60	E
AD 2312	A 6	3.2	38.1	0.42	76.5	1.01	0.18	0.125	1.500	0.016	3.010	0.23	1.05	E
AD 2412	A 6	3.2	38.1	0.46	68.1	1.31	0.31	0.125	1.500	0.018	2.680	0.29	1.75	E

Choose from millions of sizes - www.flexosprings.com

Extension Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						PRICE BAND
		Outside Dia.	Free Lth.	Wire Size	Extended Lth.	Initial Tension	Rate	Outside Dia.	Free Lth.	Wire Size	Extended Lth.	Initial Tension	Rate	
		mm	mm	mm	mm	N	N/mm	inches	inches	inches	inches	Lbs	Lbs/in	
AD 2512	A 6	3.2	38.1	0.51	60.4	1.75	0.55	0.125	1.500	0.020	2.378	0.39	3.13	E
AD 2214	A 6	3.2	44.5	0.38	105.8	0.77	0.09	0.125	1.750	0.015	4.165	0.17	0.50	E
AD 2314	A 6	3.2	44.5	0.42	90.4	1.01	0.15	0.125	1.750	0.016	3.558	0.23	0.88	E
AD 2414	A 6	3.2	44.5	0.46	80.3	1.31	0.26	0.125	1.750	0.018	3.162	0.29	1.46	E
AD 2514	A 6	3.2	44.5	0.51	71.1	1.75	0.46	0.125	1.750	0.020	2.801	0.39	2.61	E
AD 2216	A 6	3.2	50.8	0.38	122.3	0.77	0.08	0.125	2.000	0.015	4.814	0.17	0.43	F
AD 2316	A 6	3.2	50.8	0.42	104.3	1.01	0.13	0.125	2.000	0.016	4.107	0.23	0.75	F
AD 2416	A 6	3.2	50.8	0.46	92.6	1.31	0.22	0.125	2.000	0.018	3.645	0.29	1.25	F
AD 2516	A 6	3.2	50.8	0.51	81.9	1.75	0.39	0.125	2.000	0.020	3.224	0.39	2.25	F
AE 2406	A 8	4.0	19.1	0.46	37.9	1.07	0.40	0.156	0.750	0.018	1.493	0.24	2.27	E
AE 2506	A 8	4.0	19.1	0.51	33.4	1.43	0.70	0.156	0.750	0.020	1.314	0.32	3.99	E
AE 2606	A 8	4.0	19.1	0.56	30.1	1.86	1.17	0.156	0.750	0.022	1.187	0.42	6.69	E
AE 2706	A 8	4.0	19.1	0.61	27.7	2.34	1.89	0.156	0.750	0.024	1.091	0.53	10.77	E
ME 4104	A 8	4.0	20.0	0.51	35.8	1.42	0.63	0.157	0.787	0.020	1.409	0.32	3.60	E
AE 2407	A 8	4.0	22.2	0.46	46.3	1.07	0.31	0.156	0.875	0.018	1.822	0.24	1.78	E
AE 2507	A 8	4.0	22.2	0.51	40.5	1.43	0.55	0.156	0.875	0.020	1.594	0.32	3.14	E
AE 2607	A 8	4.0	22.2	0.56	36.3	1.86	0.92	0.156	0.875	0.022	1.430	0.42	5.26	E
AE 2707	A 8	4.0	22.2	0.61	33.2	2.34	1.48	0.156	0.875	0.024	1.307	0.53	8.48	E
ME 4105	A 8	4.0	25.0	0.51	47.1	1.42	0.45	0.157	0.984	0.020	1.854	0.32	2.57	E
AE 2408	A 8	4.0	25.4	0.46	54.6	1.07	0.26	0.156	1.000	0.018	2.151	0.24	1.46	E
AE 2508	A 8	4.0	25.4	0.51	47.6	1.43	0.45	0.156	1.000	0.020	1.873	0.32	2.58	E
AE 2608	A 8	4.0	25.4	0.56	42.5	1.86	0.76	0.156	1.000	0.022	1.674	0.42	4.34	E
AE 2708	A 8	4.0	25.4	0.61	38.8	2.34	1.22	0.156	1.000	0.024	1.526	0.53	6.99	E
ME 4106	A 8	4.0	30.0	0.51	58.4	1.42	0.35	0.157	1.181	0.020	2.300	0.32	2.00	E
AE 2410	A 8	4.0	31.8	0.46	71.3	1.07	0.19	0.156	1.250	0.018	2.808	0.24	1.08	E
AE 2510	A 8	4.0	31.8	0.51	61.7	1.43	0.33	0.156	1.250	0.020	2.431	0.32	1.91	E
AE 2610	A 8	4.0	31.8	0.56	54.9	1.86	0.56	0.156	1.250	0.022	2.161	0.42	3.21	E
AE 2710	A 8	4.0	31.8	0.61	49.8	2.34	0.91	0.156	1.250	0.024	1.960	0.53	5.17	E
ME 4107	A 8	4.0	35.0	0.51	69.7	1.42	0.29	0.157	1.378	0.020	2.745	0.32	1.63	E
AE 2412	A 8	4.0	38.1	0.46	88.0	1.07	0.15	0.156	1.500	0.018	3.466	0.24	0.86	F
AE 2512	A 8	4.0	38.1	0.51	75.9	1.43	0.27	0.156	1.500	0.020	2.989	0.32	1.51	F
AE 2612	A 8	4.0	38.1	0.56	67.3	1.86	0.45	0.156	1.500	0.022	2.648	0.42	2.54	F
AE 2712	A 8	4.0	38.1	0.61	60.8	2.34	0.72	0.156	1.500	0.024	2.395	0.53	4.11	F
ME 4108	A 8	4.0	40.0	0.51	81.0	1.42	0.24	0.157	1.575	0.020	3.190	0.32	1.38	F
AE 2414	A 8	4.0	44.5	0.46	104.7	1.07	0.12	0.156	1.750	0.018	4.123	0.24	0.71	F
AE 2514	A 8	4.0	44.5	0.51	90.1	1.43	0.22	0.156	1.750	0.020	3.547	0.32	1.25	F
AE 2614	A 8	4.0	44.5	0.56	79.6	1.86	0.37	0.156	1.750	0.022	3.136	0.42	2.11	F
AE 2714	A 8	4.0	44.5	0.61	71.9	2.34	0.60	0.156	1.750	0.024	2.830	0.53	3.40	F
ME 4110	A 8	4.0	50.0	0.51	103.7	1.42	0.19	0.157	1.969	0.020	4.081	0.32	1.06	F
AE 2416	A 8	4.0	50.8	0.46	121.4	1.07	0.11	0.156	2.000	0.018	4.781	0.24	0.61	F
AE 2516	A 8	4.0	50.8	0.51	104.3	1.43	0.19	0.156	2.000	0.020	4.105	0.32	1.07	F
AE 2616	A 8	4.0	50.8	0.56	92.0	1.86	0.32	0.156	2.000	0.022	3.623	0.42	1.80	F
AE 2716	A 8	4.0	50.8	0.61	82.9	2.34	0.51	0.156	2.000	0.024	3.264	0.53	2.91	F
ME 4112	A 8	4.0	60.0	0.51	126.3	1.42	0.15	0.157	2.362	0.020	4.971	0.32	0.86	F
AE 2420	A 8	4.0	63.5	0.46	154.8	1.07	0.08	0.156	2.500	0.018	6.096	0.24	0.47	F
AE 2520	A 8	4.0	63.5	0.51	132.6	1.43	0.15	0.156	2.500	0.020	5.221	0.32	0.83	F
AE 2620	A 8	4.0	63.5	0.56	116.8	1.86	0.24	0.156	2.500	0.022	4.598	0.42	1.39	F
AE 2720	A 8	4.0	63.5	0.61	105.0	2.34	0.39	0.156	2.500	0.024	4.133	0.53	2.25	F
AF 2306	A 9	4.7	19.1	0.42	50.6	0.69	0.15	0.187	0.750	0.016	1.993	0.16	0.88	E
AF 2406	A 9	4.7	19.1	0.46	44.3	0.90	0.25	0.187	0.750	0.018	1.744	0.20	1.43	E
AF 2506	A 9	4.7	19.1	0.51	38.4	1.21	0.44	0.187	0.750	0.020	1.514	0.27	2.49	E

For Sales or Assistance - Tel 0117 967 3313

All characteristics are nominal

Extension Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						PRICE BAND
		Outside Dia.	Free Lth.	Wire Size	Extended Lth.	Initial Tension	Rate	Outside Dia.	Free Lth.	Wire Size	Extended Lth.	Initial Tension	Rate	
		mm	mm	mm	mm	N	N/mm	inches	inches	inches	inches	Lbs	Lbs/in	
AF 2606	A 9	4.7	19.1	0.56	34.2	1.57	0.73	0.187	0.750	0.022	1.347	0.35	4.14	E
AF 2706	A 9	4.7	19.1	0.61	31.1	1.98	1.16	0.187	0.750	0.024	1.223	0.45	6.61	E
AF 2806	A 9	4.7	19.1	0.71	26.9	3.01	2.67	0.187	0.750	0.028	1.061	0.68	15.24	E
AF 2308	A 9	4.7	25.4	0.42	77.1	0.69	0.09	0.187	1.000	0.016	3.034	0.16	0.53	E
AF 2408	A 9	4.7	25.4	0.46	66.7	0.90	0.15	0.187	1.000	0.018	2.625	0.20	0.87	E
AF 2508	A 9	4.7	25.4	0.51	57.0	1.21	0.27	0.187	1.000	0.020	2.246	0.27	1.53	E
AF 2608	A 9	4.7	25.4	0.56	50.1	1.57	0.45	0.187	1.000	0.022	1.973	0.35	2.55	E
AF 2708	A 9	4.7	25.4	0.61	44.9	1.98	0.71	0.187	1.000	0.024	1.768	0.45	4.07	E
AF 2808	A 9	4.7	25.4	0.71	38.2	3.01	1.65	0.187	1.000	0.028	1.503	0.68	9.41	E
AF 2310	A 9	4.7	31.8	0.42	103.5	0.69	0.07	0.187	1.250	0.016	4.076	0.16	0.38	E
AF 2410	A 9	4.7	31.8	0.46	89.1	0.90	0.11	0.187	1.250	0.018	3.506	0.20	0.63	E
AF 2510	A 9	4.7	31.8	0.51	75.6	1.21	0.19	0.187	1.250	0.020	2.978	0.27	1.10	E
AF 2610	A 9	4.7	31.8	0.56	66.0	1.57	0.32	0.187	1.250	0.022	2.598	0.35	1.84	E
AF 2710	A 9	4.7	31.8	0.61	58.8	1.98	0.51	0.187	1.250	0.024	2.313	0.45	2.94	E
AF 2810	A 9	4.7	31.8	0.71	49.4	3.01	1.19	0.187	1.250	0.028	1.945	0.68	6.81	E
AF 2312	A 9	4.7	38.1	0.42	130.0	0.69	0.05	0.187	1.500	0.016	5.118	0.16	0.30	F
AF 2412	A 9	4.7	38.1	0.46	111.4	0.90	0.09	0.187	1.500	0.018	4.387	0.20	0.49	F
AF 2512	A 9	4.7	38.1	0.51	94.2	1.21	0.15	0.187	1.500	0.020	3.710	0.27	0.86	F
AF 2612	A 9	4.7	38.1	0.56	81.9	1.57	0.25	0.187	1.500	0.022	3.223	0.35	1.44	F
AF 2712	A 9	4.7	38.1	0.61	72.6	1.98	0.40	0.187	1.500	0.024	2.859	0.45	2.30	F
AF 2812	A 9	4.7	38.1	0.71	60.6	3.01	0.93	0.187	1.500	0.028	2.387	0.68	5.33	F
AF 2314	A 9	4.7	44.5	0.42	156.5	0.69	0.04	0.187	1.750	0.016	6.160	0.16	0.25	F
AF 2414	A 9	4.7	44.5	0.46	133.8	0.90	0.07	0.187	1.750	0.018	5.268	0.20	0.40	F
AF 2514	A 9	4.7	44.5	0.51	112.8	1.21	0.12	0.187	1.750	0.020	4.442	0.27	0.71	F
AF 2614	A 9	4.7	44.5	0.56	97.8	1.57	0.21	0.187	1.750	0.022	3.849	0.35	1.18	F
AF 2714	A 9	4.7	44.5	0.61	86.5	1.98	0.33	0.187	1.750	0.024	3.404	0.45	1.89	F
AF 2814	A 9	4.7	44.5	0.71	71.9	3.01	0.77	0.187	1.750	0.028	2.829	0.68	4.38	F
AF 2316	A 9	4.7	50.8	0.42	182.9	0.69	0.04	0.187	2.000	0.016	7.201	0.16	0.21	F
AF 2416	A 9	4.7	50.8	0.46	156.2	0.90	0.06	0.187	2.000	0.018	6.149	0.20	0.34	F
AF 2516	A 9	4.7	50.8	0.51	131.4	1.21	0.11	0.187	2.000	0.020	5.174	0.27	0.60	F
AF 2616	A 9	4.7	50.8	0.56	113.6	1.57	0.18	0.187	2.000	0.022	4.474	0.35	1.00	F
AF 2716	A 9	4.7	50.8	0.61	100.3	1.98	0.28	0.187	2.000	0.024	3.949	0.45	1.60	F
AF 2816	A 9	4.7	50.8	0.71	83.1	3.01	0.65	0.187	2.000	0.028	3.271	0.68	3.72	F
AF 2320	A 9	4.7	63.5	0.42	235.8	0.69	0.03	0.187	2.500	0.016	9.285	0.16	0.16	G
AF 2420	A 9	4.7	63.5	0.46	200.9	0.90	0.05	0.187	2.500	0.018	7.911	0.20	0.26	G
AF 2520	A 9	4.7	63.5	0.51	168.6	1.21	0.08	0.187	2.500	0.020	6.638	0.27	0.46	G
AF 2620	A 9	4.7	63.5	0.56	145.4	1.57	0.13	0.187	2.500	0.022	5.724	0.35	0.77	G
AF 2720	A 9	4.7	63.5	0.61	128.0	1.98	0.22	0.187	2.500	0.024	5.040	0.45	1.23	G
AF 2820	A 9	4.7	63.5	0.71	105.6	3.01	0.50	0.187	2.500	0.028	4.156	0.68	2.86	G
AF 2324	A 9	4.7	76.2	0.42	288.7	0.69	0.02	0.187	3.000	0.016	11.368	0.16	0.13	G
AF 2424	A 9	4.7	76.2	0.46	245.7	0.90	0.04	0.187	3.000	0.018	9.672	0.20	0.21	G
AF 2524	A 9	4.7	76.2	0.51	205.8	1.21	0.07	0.187	3.000	0.020	8.102	0.27	0.37	G
AF 2624	A 9	4.7	76.2	0.56	177.2	1.57	0.11	0.187	3.000	0.022	6.975	0.35	0.62	G
AF 2724	A 9	4.7	76.2	0.61	155.7	1.98	0.17	0.187	3.000	0.024	6.131	0.45	1.00	G
AF 2824	A 9	4.7	76.2	0.71	128.0	3.01	0.41	0.187	3.000	0.028	5.040	0.68	2.32	G
MF 4405	B 1	5.0	25.0	0.61	46.0	1.89	0.63	0.197	0.984	0.024	1.810	0.43	3.61	E
MF 4406	B 1	5.0	30.0	0.61	57.7	1.89	0.48	0.197	1.181	0.024	2.272	0.43	2.73	E
MF 4408	B 1	5.0	40.0	0.61	81.1	1.89	0.32	0.197	1.575	0.024	3.194	0.43	1.84	F
MF 4410	B 1	5.0	50.0	0.61	104.6	1.89	0.24	0.197	1.969	0.024	4.117	0.43	1.39	F
MF 4412	B 1	5.0	60.0	0.61	128.0	1.89	0.19	0.197	2.362	0.024	5.040	0.43	1.11	F
MF 4414	B 1	5.0	70.0	0.61	151.5	1.89	0.16	0.197	2.756	0.024	5.963	0.43	0.93	G

Choose from millions of sizes - www.flexosprings.com

Extension Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						PRICE BAND
		Outside Dia.	Free Lth.	Wire Size	Extended Lth.	Initial Tension	Rate	Outside Dia.	Free Lth.	Wire Size	Extended Lth.	Initial Tension	Rate	
		mm	mm	mm	mm	N	N/mm	inches	inches	inches	inches	Lbs	Lbs/in	
MF 4416	B 1	5.0	80.0	0.61	174.9	1.89	0.14	0.197	3.150	0.024	6.885	0.43	0.80	G
AG 2706	B 2	5.5	19.1	0.61	33.9	1.72	0.81	0.218	0.750	0.024	1.334	0.39	4.64	E
AG 2806	B 2	5.5	19.1	0.71	29.0	2.62	1.85	0.218	0.750	0.028	1.141	0.59	10.55	E
AG 2906	B 2	5.5	19.1	0.81	26.0	3.75	3.79	0.218	0.750	0.032	1.022	0.84	21.67	E
AG 3006	B 2	5.5	19.1	0.91	24.0	5.14	7.22	0.218	0.750	0.036	0.946	1.15	41.20	E
AG 2708	B 2	5.5	25.4	0.61	51.2	1.72	0.47	0.218	1.000	0.024	2.016	0.39	2.67	E
AG 2808	B 2	5.5	25.4	0.71	42.6	2.62	1.07	0.218	1.000	0.028	1.676	0.59	6.09	E
AG 2908	B 2	5.5	25.4	0.81	37.3	3.75	2.20	0.218	1.000	0.032	1.469	0.84	12.58	E
AG 3008	B 2	5.5	25.4	0.91	33.9	5.14	4.21	0.218	1.000	0.036	1.336	1.15	24.03	E
AG 2710	B 2	5.5	31.8	0.61	68.5	1.72	0.33	0.218	1.250	0.024	2.698	0.39	1.87	E
AG 2810	B 2	5.5	31.8	0.71	56.2	2.62	0.75	0.218	1.250	0.028	2.212	0.59	4.28	E
AG 2910	B 2	5.5	31.8	0.81	48.7	3.75	1.55	0.218	1.250	0.032	1.916	0.84	8.86	E
AG 3010	B 2	5.5	31.8	0.91	43.9	5.14	2.97	0.218	1.250	0.036	1.727	1.15	16.96	E
AG 2712	B 2	5.5	38.1	0.61	85.8	1.72	0.25	0.218	1.500	0.024	3.380	0.39	1.44	F
AG 2812	B 2	5.5	38.1	0.71	69.8	2.62	0.58	0.218	1.500	0.028	2.747	0.59	3.30	F
AG 2912	B 2	5.5	38.1	0.81	60.0	3.75	1.20	0.218	1.500	0.032	2.363	0.84	6.84	F
AG 3012	B 2	5.5	38.1	0.91	53.8	5.14	2.30	0.218	1.500	0.036	2.117	1.15	13.11	F
AG 2714	B 2	5.5	44.5	0.61	103.2	1.72	0.21	0.218	1.750	0.024	4.062	0.39	1.17	F
AG 2814	B 2	5.5	44.5	0.71	83.4	2.62	0.47	0.218	1.750	0.028	3.283	0.59	2.69	F
AG 2914	B 2	5.5	44.5	0.81	71.4	3.75	0.98	0.218	1.750	0.032	2.810	0.84	5.57	F
AG 3014	B 2	5.5	44.5	0.91	63.7	5.14	1.87	0.218	1.750	0.036	2.507	1.15	10.68	F
AG 2716	B 2	5.5	50.8	0.61	120.5	1.72	0.17	0.218	2.000	0.024	4.744	0.39	0.99	F
AG 2816	B 2	5.5	50.8	0.71	97.0	2.62	0.40	0.218	2.000	0.028	3.818	0.59	2.27	F
AG 2916	B 2	5.5	50.8	0.81	82.7	3.75	0.82	0.218	2.000	0.032	3.257	0.84	4.70	F
AG 3016	B 2	5.5	50.8	0.91	73.6	5.14	1.58	0.218	2.000	0.036	2.897	1.15	9.01	F
AG 2720	B 2	5.5	63.5	0.61	155.1	1.72	0.13	0.218	2.500	0.024	6.107	0.39	0.75	G
AG 2820	B 2	5.5	63.5	0.71	124.2	2.62	0.30	0.218	2.500	0.028	4.889	0.59	1.72	G
AG 2920	B 2	5.5	63.5	0.81	105.4	3.75	0.63	0.218	2.500	0.032	4.150	0.84	3.58	G
AG 3020	B 2	5.5	63.5	0.91	93.4	5.14	1.20	0.218	2.500	0.036	3.677	1.15	6.87	G
AG 2724	B 2	5.5	76.2	0.61	189.8	1.72	0.11	0.218	3.000	0.024	7.471	0.39	0.61	G
AG 2824	B 2	5.5	76.2	0.71	151.4	2.62	0.24	0.218	3.000	0.028	5.961	0.59	1.39	G
AG 2924	B 2	5.5	76.2	0.81	128.1	3.75	0.51	0.218	3.000	0.032	5.044	0.84	2.89	G
AG 3024	B 2	5.5	76.2	0.91	113.2	5.14	0.97	0.218	3.000	0.036	4.458	1.15	5.55	G
MH 4906	B 3	6.0	30.0	0.81	48.2	3.49	1.34	0.236	1.181	0.032	1.899	0.78	7.65	F
MH 4907	B 3	6.0	35.0	0.81	58.1	3.49	1.06	0.236	1.378	0.032	2.287	0.78	6.04	F
MH 4908	B 3	6.0	40.0	0.81	67.9	3.49	0.87	0.236	1.575	0.032	2.675	0.78	4.99	F
MH 4910	B 3	6.0	50.0	0.81	87.6	3.49	0.65	0.236	1.969	0.032	3.450	0.78	3.71	F
MH 4912	B 3	6.0	60.0	0.81	107.3	3.49	0.52	0.236	2.362	0.032	4.226	0.78	2.95	F
MH 4914	B 3	6.0	70.0	0.81	127.0	3.49	0.43	0.236	2.756	0.032	5.001	0.78	2.45	G
MH 4916	B 3	6.0	80.0	0.81	146.7	3.49	0.37	0.236	3.150	0.032	5.777	0.78	2.09	G
MH 4920	B 3	6.0	100.0	0.81	186.1	3.49	0.28	0.236	3.937	0.032	7.328	0.78	1.62	H
AH 2508	B 4	6.4	25.4	0.51	75.8	0.92	0.13	0.250	1.000	0.020	2.985	0.21	0.73	E
AH 2608	B 4	6.4	25.4	0.56	65.3	1.20	0.21	0.250	1.000	0.022	2.571	0.27	1.20	E
AH 2708	B 4	6.4	25.4	0.61	57.3	1.51	0.33	0.250	1.000	0.024	2.257	0.34	1.89	E
AH 2808	B 4	6.4	25.4	0.71	46.9	2.31	0.75	0.250	1.000	0.028	1.847	0.52	4.28	E
AH 2908	B 4	6.4	25.4	0.81	40.5	3.31	1.53	0.250	1.000	0.032	1.596	0.75	8.75	E
AH 3008	B 4	6.4	25.4	0.91	36.4	4.56	2.90	0.250	1.000	0.036	1.433	1.02	16.55	E
AH 3108	B 4	6.4	25.4	1.02	33.6	6.05	5.16	0.250	1.000	0.040	1.323	1.36	29.44	E
AH 2510	B 4	6.4	31.8	0.51	106.4	0.92	0.09	0.250	1.250	0.020	4.190	0.21	0.49	F
AH 2610	B 4	6.4	31.8	0.56	90.8	1.20	0.14	0.250	1.250	0.022	3.574	0.27	0.81	F
AH 2710	B 4	6.4	31.8	0.61	78.9	1.51	0.22	0.250	1.250	0.024	3.107	0.34	1.28	F

For Sales or Assistance - Tel 0117 967 3313

All characteristics are nominal

Extension Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						PRICE SAND
		Outside Dia.	Free Lth.	Wire Size	Extended Lth.	Initial Tension	Rate	Outside Dia.	Free Lth.	Wire Size	Extended Lth.	Initial Tension	Rate	
		mm	mm	mm	mm	N	N/mm	inches	inches	inches	inches	Lbs	Lbs/in	
AH 2810	B 4	6.4	31.8	0.71	63.5	2.31	0.51	0.250	1.250	0.028	2.499	0.52	2.91	F
AH 2910	B 4	6.4	31.8	0.81	54.0	3.31	1.04	0.250	1.250	0.032	2.126	0.75	5.95	F
AH 3010	B 4	6.4	31.8	0.91	47.9	4.56	1.98	0.250	1.250	0.036	1.885	1.02	11.29	F
AH 3110	B 4	6.4	31.8	1.02	43.8	6.05	3.52	0.250	1.250	0.040	1.723	1.36	20.12	F
AH 2512	B 4	6.4	38.1	0.51	137.0	0.92	0.06	0.250	1.500	0.020	5.394	0.21	0.37	F
AH 2612	B 4	6.4	38.1	0.56	116.2	1.20	0.11	0.250	1.500	0.022	4.576	0.27	0.61	F
AH 2712	B 4	6.4	38.1	0.61	100.5	1.51	0.17	0.250	1.500	0.024	3.957	0.34	0.97	F
AH 2812	B 4	6.4	38.1	0.71	80.0	2.31	0.39	0.250	1.500	0.028	3.150	0.52	2.20	F
AH 2912	B 4	6.4	38.1	0.81	67.5	3.31	0.79	0.250	1.500	0.032	2.656	0.75	4.51	F
AH 3012	B 4	6.4	38.1	0.91	59.4	4.56	1.50	0.250	1.500	0.036	2.337	1.02	8.56	F
AH 3112	B 4	6.4	38.1	1.02	53.9	6.05	2.68	0.250	1.500	0.040	2.123	1.36	15.28	F
AH 2514	B 4	6.4	44.5	0.51	167.6	0.92	0.05	0.250	1.750	0.020	6.599	0.21	0.30	F
AH 2614	B 4	6.4	44.5	0.56	141.7	1.20	0.09	0.250	1.750	0.022	5.578	0.27	0.49	F
AH 2714	B 4	6.4	44.5	0.61	122.1	1.51	0.14	0.250	1.750	0.024	4.807	0.34	0.78	F
AH 2814	B 4	6.4	44.5	0.71	96.5	2.31	0.31	0.250	1.750	0.028	3.801	0.52	1.77	F
AH 2914	B 4	6.4	44.5	0.81	80.9	3.31	0.64	0.250	1.750	0.032	3.186	0.75	3.63	F
AH 3014	B 4	6.4	44.5	0.91	70.9	4.56	1.21	0.250	1.750	0.036	2.789	1.02	6.90	F
AH 3114	B 4	6.4	44.5	1.02	64.1	6.05	2.16	0.250	1.750	0.040	2.523	1.36	12.32	F
AH 2516	B 4	6.4	50.8	0.51	198.2	0.92	0.04	0.250	2.000	0.020	7.803	0.21	0.25	F
AH 2616	B 4	6.4	50.8	0.56	167.2	1.20	0.07	0.250	2.000	0.022	6.581	0.27	0.41	F
AH 2716	B 4	6.4	50.8	0.61	143.7	1.51	0.11	0.250	2.000	0.024	5.657	0.34	0.65	F
AH 2816	B 4	6.4	50.8	0.71	113.1	2.31	0.26	0.250	2.000	0.028	4.452	0.52	1.48	F
AH 2916	B 4	6.4	50.8	0.81	94.4	3.31	0.53	0.250	2.000	0.032	3.716	0.75	3.04	F
AH 3016	B 4	6.4	50.8	0.91	82.3	4.56	1.01	0.250	2.000	0.036	3.242	1.02	5.77	F
AH 3116	B 4	6.4	50.8	1.02	74.2	6.05	1.81	0.250	2.000	0.040	2.923	1.36	10.32	F
AH 2520	B 4	6.4	63.5	0.51	259.4	0.92	0.03	0.250	2.500	0.020	10.212	0.21	0.19	G
AH 2620	B 4	6.4	63.5	0.56	218.1	1.20	0.05	0.250	2.500	0.022	8.586	0.27	0.31	G
AH 2720	B 4	6.4	63.5	0.61	186.9	1.51	0.09	0.250	2.500	0.024	7.357	0.34	0.49	G
AH 2820	B 4	6.4	63.5	0.71	146.2	2.31	0.20	0.250	2.500	0.028	5.755	0.52	1.12	G
AH 2920	B 4	6.4	63.5	0.81	121.3	3.31	0.40	0.250	2.500	0.032	4.776	0.75	2.29	G
AH 3020	B 4	6.4	63.5	0.91	105.3	4.56	0.76	0.250	2.500	0.036	4.146	1.02	4.36	G
AH 3120	B 4	6.4	63.5	1.02	94.5	6.05	1.36	0.250	2.500	0.040	3.722	1.36	7.79	G
AH 2524	B 4	6.4	76.2	0.51	320.6	0.92	0.03	0.250	3.000	0.020	12.621	0.21	0.15	G
AH 2624	B 4	6.4	76.2	0.56	269.0	1.20	0.04	0.250	3.000	0.022	10.591	0.27	0.25	G
AH 2724	B 4	6.4	76.2	0.61	230.0	1.51	0.07	0.250	3.000	0.024	9.057	0.34	0.39	G
AH 2824	B 4	6.4	76.2	0.71	179.2	2.31	0.16	0.250	3.000	0.028	7.057	0.52	0.89	G
AH 2924	B 4	6.4	76.2	0.81	148.2	3.31	0.32	0.250	3.000	0.032	5.836	0.75	1.84	G
AH 3024	B 4	6.4	76.2	0.91	128.3	4.56	0.61	0.250	3.000	0.036	5.050	1.02	3.50	G
AH 3124	B 4	6.4	76.2	1.02	114.8	6.05	1.10	0.250	3.000	0.040	4.522	1.36	6.26	G
AH 2532	B 4	6.4	101.6	0.51	443.0	0.92	0.02	0.250	4.000	0.020	17.439	0.21	0.11	J
AH 2632	B 4	6.4	101.6	0.56	370.9	1.20	0.03	0.250	4.000	0.022	14.600	0.27	0.18	J
AH 2732	B 4	6.4	101.6	0.61	316.4	1.51	0.05	0.250	4.000	0.024	12.457	0.34	0.28	J
AH 2832	B 4	6.4	101.6	0.71	245.4	2.31	0.11	0.250	4.000	0.028	9.662	0.52	0.64	J
AH 2932	B 4	6.4	101.6	0.81	202.1	3.31	0.23	0.250	4.000	0.032	7.956	0.75	1.32	J
AH 3032	B 4	6.4	101.6	0.91	174.2	4.56	0.44	0.250	4.000	0.036	6.858	1.02	2.51	J
AH 3132	B 4	6.4	101.6	1.02	155.5	6.05	0.79	0.250	4.000	0.040	6.121	1.36	4.49	J
AJ 2808	B 5	7.1	25.4	0.71	50.6	2.07	0.57	0.281	1.000	0.028	1.991	0.46	3.28	E
AJ 2908	B 5	7.1	25.4	0.81	43.3	2.97	1.16	0.281	1.000	0.032	1.704	0.67	6.65	E
AJ 3008	B 5	7.1	25.4	0.91	38.5	4.10	2.18	0.281	1.000	0.036	1.517	0.92	12.47	E
AJ 3108	B 5	7.1	25.4	1.02	35.3	5.46	3.85	0.281	1.000	0.040	1.390	1.23	22.00	E
AJ 2810	B 5	7.1	31.8	0.71	70.4	2.07	0.37	0.281	1.250	0.028	2.773	0.46	2.13	F

Choose from millions of sizes - www.flexosprings.com

Extension Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						PRICE BAND
		Outside Dia.	Free Lth.	Wire Size	Extended Lth.	Initial Tension	Rate	Outside Dia.	Free Lth.	Wire Size	Extended Lth.	Initial Tension	Rate	
		mm	mm	mm	mm	N	N/mm	inches	inches	inches	inches	lbs	lbs/in	
AJ 2910	B 5	7.1	31.8	0.81	59.1	2.97	0.76	0.281	1.250	0.032	2.329	0.67	4.34	F
AJ 3010	B 5	7.1	31.8	0.91	51.8	4.10	1.43	0.281	1.250	0.036	2.040	0.92	8.16	F
AJ 3110	B 5	7.1	31.8	1.02	46.9	5.46	2.53	0.281	1.250	0.040	1.845	1.23	14.45	F
MJ 5107	B 5	7.0	35.0	0.91	57.8	4.17	1.28	0.276	1.378	0.036	2.274	0.94	7.33	F
AJ 2812	B 5	7.1	38.1	0.71	90.3	2.07	0.28	0.281	1.500	0.028	3.555	0.46	1.58	F
AJ 2912	B 5	7.1	38.1	0.81	75.0	2.97	0.56	0.281	1.500	0.032	2.953	0.67	3.22	F
AJ 3012	B 5	7.1	38.1	0.91	65.1	4.10	1.06	0.281	1.500	0.036	2.563	0.92	6.07	F
AJ 3112	B 5	7.1	38.1	1.02	58.4	5.46	1.88	0.281	1.500	0.040	2.299	1.23	10.75	F
MJ 5108	B 5	7.0	40.0	0.91	68.0	4.17	1.04	0.276	1.575	0.036	2.675	0.94	5.96	F
MJ 5110	B 5	7.0	50.0	0.91	88.3	4.17	0.76	0.276	1.969	0.036	3.478	0.94	4.35	F
AJ 2816	B 5	7.1	50.8	0.71	130.0	2.07	0.18	0.281	2.000	0.028	5.119	0.46	1.04	F
AJ 2916	B 5	7.1	50.8	0.81	106.7	2.97	0.37	0.281	2.000	0.032	4.202	0.67	2.13	F
AJ 3016	B 5	7.1	50.8	0.91	91.6	4.10	0.70	0.281	2.000	0.036	3.608	0.92	4.01	F
AJ 3116	B 5	7.1	50.8	1.02	81.5	5.46	1.25	0.281	2.000	0.040	3.207	1.23	7.12	F
MJ 5112	B 5	7.0	60.0	0.91	108.7	4.17	0.60	0.276	2.362	0.036	4.281	0.94	3.42	G
AJ 2820	B 5	7.1	63.5	0.71	169.7	2.07	0.14	0.281	2.500	0.028	6.683	0.46	0.78	G
AJ 2920	B 5	7.1	63.5	0.81	138.5	2.97	0.28	0.281	2.500	0.032	5.451	0.67	1.59	G
AJ 3020	B 5	7.1	63.5	0.91	118.2	4.10	0.52	0.281	2.500	0.036	4.654	0.92	2.99	G
AJ 3120	B 5	7.1	63.5	1.02	104.5	5.46	0.93	0.281	2.500	0.040	4.115	1.23	5.32	G
MJ 5114	B 5	7.0	70.0	0.91	129.1	4.17	0.49	0.276	2.756	0.036	5.083	0.94	2.82	G
AJ 2824	B 5	7.1	76.2	0.71	209.5	2.07	0.11	0.281	3.000	0.028	8.247	0.46	0.62	G
AJ 2924	B 5	7.1	76.2	0.81	170.2	2.97	0.22	0.281	3.000	0.032	6.700	0.67	1.27	G
AJ 3024	B 5	7.1	76.2	0.91	144.8	4.10	0.42	0.281	3.000	0.036	5.699	0.92	2.39	G
AJ 3124	B 5	7.1	76.2	1.02	127.6	5.46	0.74	0.281	3.000	0.040	5.024	1.23	4.24	G
MJ 5116	B 5	7.0	80.0	0.91	149.5	4.17	0.42	0.276	3.150	0.036	5.886	0.94	2.40	G
MJ 5120	B 5	7.0	100.0	0.91	190.3	4.17	0.32	0.276	3.937	0.036	7.491	0.94	1.85	J
AJ 2832	B 5	7.1	101.6	0.71	288.9	2.07	0.08	0.281	4.000	0.028	11.374	0.46	0.44	J
AJ 2932	B 5	7.1	101.6	0.81	233.6	2.97	0.16	0.281	4.000	0.032	9.198	0.67	0.90	J
AJ 3032	B 5	7.1	101.6	0.91	197.9	4.10	0.30	0.281	4.000	0.036	7.790	0.92	1.70	J
AJ 3132	B 5	7.1	101.6	1.02	173.7	5.46	0.53	0.281	4.000	0.040	6.840	1.23	3.02	J
MJ 5124	B 5	7.0	120.0	0.91	231.0	4.17	0.26	0.276	4.724	0.036	9.096	0.94	1.50	J
AJ 2840	B 5	7.1	127.0	0.71	368.3	2.07	0.06	0.281	5.000	0.028	14.502	0.46	0.34	K
AJ 2940	B 5	7.1	127.0	0.81	297.1	2.97	0.12	0.281	5.000	0.032	11.696	0.67	0.70	K
AJ 3040	B 5	7.1	127.0	0.91	251.0	4.10	0.23	0.281	5.000	0.036	9.881	0.92	1.32	K
AJ 3140	B 5	7.1	127.0	1.02	219.9	5.46	0.41	0.281	5.000	0.040	8.657	1.23	2.35	K
AK 2810	B 7	7.9	31.8	0.71	77.0	1.87	0.29	0.312	1.250	0.028	3.031	0.42	1.65	F
AK 2910	B 7	7.9	31.8	0.81	64.0	2.70	0.58	0.312	1.250	0.032	2.520	0.61	3.34	F
AK 3010	B 7	7.9	31.8	0.91	55.6	3.72	1.09	0.312	1.250	0.036	2.187	0.84	6.25	F
AK 3110	B 7	7.9	31.8	1.02	49.8	4.96	1.92	0.312	1.250	0.040	1.961	1.12	10.98	F
AK 3210	B 7	7.9	31.8	1.22	42.7	8.13	5.17	0.312	1.250	0.048	1.683	1.83	29.54	F
MK 4907	B 7	8.0	35.0	0.81	74.1	2.67	0.48	0.315	1.378	0.032	2.918	0.60	2.73	F
MK 5307	B 7	8.0	35.0	1.02	56.9	4.92	1.57	0.315	1.378	0.040	2.240	1.11	8.99	F
AK 2812	B 7	7.9	38.1	0.71	100.6	1.87	0.21	0.312	1.500	0.028	3.962	0.42	1.19	F
AK 2912	B 7	7.9	38.1	0.81	82.6	2.70	0.42	0.312	1.500	0.032	3.253	0.61	2.42	F
AK 3012	B 7	7.9	38.1	0.91	70.9	3.72	0.79	0.312	1.500	0.036	2.791	0.84	4.53	F
AK 3112	B 7	7.9	38.1	1.02	62.9	4.96	1.40	0.312	1.500	0.040	2.478	1.12	7.99	F
AK 3212	B 7	7.9	38.1	1.22	53.2	8.13	3.77	0.312	1.500	0.048	2.094	1.83	21.55	F
MK 4908	B 7	8.0	40.0	0.81	89.0	2.67	0.38	0.315	1.575	0.032	3.504	0.60	2.18	F
MK 5308	B 7	8.0	40.0	1.02	67.4	4.92	1.26	0.315	1.575	0.040	2.652	1.11	7.19	F
MK 4910	B 7	8.0	50.0	0.81	118.7	2.67	0.27	0.315	1.969	0.032	4.675	0.60	1.55	F
MK 5310	B 7	8.0	50.0	1.02	88.3	4.92	0.90	0.315	1.969	0.040	3.476	1.11	5.14	F

For Sales or Assistance - Tel 0117 967 3313

All characteristics are nominal


Extension Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						PRICE BAND
		Outside Dia.	Free Lth.	Wire Size	Extended Lth.	Initial Tension	Rate	Outside Dia.	Free Lth.	Wire Size	Extended Lth.	Initial Tension	Rate	
		mm	mm	mm	mm	N	N/mm	inches	inches	inches	inches	lbs.	lbs/in	
AK 2816	B 7	7.9	50.8	0.71	147.9	1.87	0.13	0.312	2.000	0.028	5.824	0.42	0.77	F
AK 2916	B 7	7.9	50.8	0.81	119.8	2.70	0.27	0.312	2.000	0.032	4.718	0.61	1.56	F
AK 3016	B 7	7.9	50.8	0.91	101.6	3.72	0.51	0.312	2.000	0.036	3.999	0.84	2.93	F
AK 3116	B 7	7.9	50.8	1.02	89.2	4.96	0.90	0.312	2.000	0.040	3.512	1.12	5.17	F
AK 3216	B 7	7.9	50.8	1.22	74.0	8.13	2.45	0.312	2.000	0.048	2.915	1.83	13.98	F
MK 4912	B 7	8.0	60.0	0.81	148.5	2.67	0.21	0.315	2.362	0.032	5.846	0.60	1.21	G
MK 5312	B 7	8.0	60.0	1.02	109.2	4.92	0.70	0.315	2.362	0.040	4.300	1.11	4.00	G
AK 2820	B 7	7.9	63.5	0.71	195.2	1.87	0.10	0.312	2.500	0.028	7.686	0.42	0.57	G
AK 2920	B 7	7.9	63.5	0.81	157.1	2.70	0.20	0.312	2.500	0.032	6.183	0.61	1.15	G
AK 3020	B 7	7.9	63.5	0.91	132.3	3.72	0.38	0.312	2.500	0.036	5.207	0.84	2.16	G
AK 3120	B 7	7.9	63.5	1.02	115.5	4.96	0.67	0.312	2.500	0.040	4.546	1.12	3.82	G
AK 3220	B 7	7.9	63.5	1.22	94.9	8.13	1.81	0.312	2.500	0.048	3.736	1.83	10.35	G
MK 4914	B 7	8.0	70.0	0.81	178.2	2.67	0.17	0.315	2.756	0.032	7.017	0.60	0.99	G
MK 5314	B 7	8.0	70.0	1.02	130.2	4.92	0.57	0.315	2.756	0.040	5.124	1.11	3.27	G
AK 2824	B 7	7.9	76.2	0.71	242.5	1.87	0.08	0.312	3.000	0.028	9.548	0.42	0.45	H
AK 2924	B 7	7.9	76.2	0.81	194.3	2.70	0.16	0.312	3.000	0.032	7.649	0.61	0.91	H
AK 3024	B 7	7.9	76.2	0.91	162.9	3.72	0.30	0.312	3.000	0.036	6.415	0.84	1.71	H
AK 3124	B 7	7.9	76.2	1.02	141.7	4.96	0.53	0.312	3.000	0.040	5.580	1.12	3.03	H
AK 3224	B 7	7.9	76.2	1.22	115.8	8.13	1.44	0.312	3.000	0.048	4.557	1.83	8.21	H
MK 4916	B 7	8.0	80.0	0.81	208.0	2.67	0.15	0.315	3.150	0.032	8.188	0.60	0.83	H
MK 5316	B 7	8.0	80.0	1.02	151.1	4.92	0.48	0.315	3.150	0.040	5.949	1.11	2.77	H
MK 4920	B 7	8.0	100.0	0.81	267.5	2.67	0.11	0.315	3.937	0.032	10.530	0.60	0.64	J
MK 5320	B 7	8.0	100.0	1.02	193.0	4.92	0.37	0.315	3.937	0.040	7.597	1.11	2.12	J
AK 2832	B 7	7.9	101.6	0.71	337.1	1.87	0.06	0.312	4.000	0.028	13.272	0.42	0.32	J
AK 2932	B 7	7.9	101.6	0.81	268.7	2.70	0.11	0.312	4.000	0.032	10.579	0.61	0.64	J
AK 3032	B 7	7.9	101.6	0.91	224.3	3.72	0.21	0.312	4.000	0.036	8.831	0.84	1.21	J
AK 3132	B 7	7.9	101.6	1.02	194.2	4.96	0.38	0.312	4.000	0.040	7.648	1.12	2.14	J
AK 3232	B 7	7.9	101.6	1.22	157.5	8.13	1.02	0.312	4.000	0.048	6.200	1.83	5.81	J
MK 4924	B 7	8.0	120.0	0.81	327.0	2.67	0.09	0.315	4.724	0.032	12.873	0.60	0.52	K
MK 5324	B 7	8.0	120.0	1.02	234.8	4.92	0.30	0.315	4.724	0.040	9.246	1.11	1.71	K
AK 2840	B 7	7.9	127.0	0.71	431.7	1.87	0.04	0.312	5.000	0.028	16.995	0.42	0.25	K
AK 2940	B 7	7.9	127.0	0.81	343.1	2.70	0.09	0.312	5.000	0.032	13.509	0.61	0.50	K
AK 3040	B 7	7.9	127.0	0.91	285.7	3.72	0.16	0.312	5.000	0.036	11.247	0.84	0.94	K
AK 3140	B 7	7.9	127.0	1.02	246.8	4.96	0.29	0.312	5.000	0.040	9.715	1.12	1.66	K
AK 3240	B 7	7.9	127.0	1.22	199.2	8.13	0.79	0.312	5.000	0.048	7.842	1.83	4.50	K
AK 2848	B 7	7.9	152.4	0.71	526.3	1.87	0.04	0.312	6.000	0.028	20.719	0.42	0.20	L
AK 2948	B 7	7.9	152.4	0.81	417.6	2.70	0.07	0.312	6.000	0.032	16.440	0.61	0.41	L
AK 3048	B 7	7.9	152.4	0.91	347.0	3.72	0.13	0.312	6.000	0.036	13.663	0.84	0.76	L
AK 3148	B 7	7.9	152.4	1.02	299.3	4.96	0.24	0.312	6.000	0.040	11.783	1.12	1.35	L
AK 3248	B 7	7.9	152.4	1.22	240.9	8.13	0.64	0.312	6.000	0.048	9.484	1.83	3.67	L
AL 2910	B 9	8.7	31.8	0.81	68.3	2.46	0.47	0.343	1.250	0.032	2.691	0.55	2.69	F
AL 3010	B 9	8.7	31.8	0.91	58.9	3.40	0.88	0.343	1.250	0.036	2.320	0.77	5.01	F
AL 3110	B 9	8.7	31.8	1.02	52.5	4.55	1.53	0.343	1.250	0.040	2.067	1.02	8.76	F
AL 3210	B 9	8.7	31.8	1.22	44.6	7.47	4.08	0.343	1.250	0.048	1.754	1.68	23.32	F
AL 2912	B 9	8.7	38.1	0.81	90.1	2.46	0.33	0.343	1.500	0.032	3.545	0.55	1.90	F
AL 3012	B 9	8.7	38.1	0.91	76.6	3.40	0.62	0.343	1.500	0.036	3.015	0.77	3.53	F
AL 3112	B 9	8.7	38.1	1.02	67.4	4.55	1.09	0.343	1.500	0.040	2.655	1.02	6.20	F
AL 3212	B 9	8.7	38.1	1.22	56.1	7.47	2.90	0.343	1.500	0.048	2.210	1.68	16.55	F
AL 2916	B 9	8.7	50.8	0.81	133.5	2.46	0.21	0.343	2.000	0.032	5.254	0.55	1.19	G
AL 3016	B 9	8.7	50.8	0.91	111.9	3.40	0.39	0.343	2.000	0.036	4.407	0.77	2.23	G
AL 3116	B 9	8.7	50.8	1.02	97.3	4.55	0.68	0.343	2.000	0.040	3.831	1.02	3.91	G

Choose from millions of sizes - www.flexosprings.com

Extension Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						PRICE BAND
		Outside Dia.	Free Lth.	Wire Size	Extended Lth.	Initial Tension	Rate	Outside Dia.	Free Lth.	Wire Size	Extended Lth.	Initial Tension	Rate	
		mm	mm	mm	mm	N	N/mm	inches	inches	inches	inches	Lbs	Lbs/in	
AL 3216	B 9	8.7	50.8	1.22	79.3	7.47	1.83	0.343	2.000	0.048	3.122	1.68	10.48	G
AL 2920	B 9	8.7	63.5	0.81	176.9	2.46	0.15	0.343	2.500	0.032	6.963	0.55	0.87	G
AL 3020	B 9	8.7	63.5	0.91	147.3	3.40	0.28	0.343	2.500	0.036	5.798	0.77	1.62	G
AL 3120	B 9	8.7	63.5	1.02	127.2	4.55	0.50	0.343	2.500	0.040	5.007	1.02	2.85	G
AL 3220	B 9	8.7	63.5	1.22	102.5	7.47	1.34	0.343	2.500	0.048	4.034	1.68	7.66	G
AL 2924	B 9	8.7	76.2	0.81	220.3	2.46	0.12	0.343	3.000	0.032	8.672	0.55	0.68	H
AL 3024	B 9	8.7	76.2	0.91	182.6	3.40	0.22	0.343	3.000	0.036	7.190	0.77	1.28	H
AL 3124	B 9	8.7	76.2	1.02	157.1	4.55	0.39	0.343	3.000	0.040	6.184	1.02	2.25	H
AL 3224	B 9	8.7	76.2	1.22	125.6	7.47	1.06	0.343	3.000	0.048	4.946	1.68	6.04	H
AL 2932	B 9	8.7	101.6	0.81	307.1	2.46	0.08	0.343	4.000	0.032	12.089	0.55	0.48	J
AL 3032	B 9	8.7	101.6	0.91	253.3	3.40	0.16	0.343	4.000	0.036	9.973	0.77	0.90	J
AL 3132	B 9	8.7	101.6	1.02	216.8	4.55	0.28	0.343	4.000	0.040	8.536	1.02	1.58	J
AL 3232	B 9	8.7	101.6	1.22	172.0	7.47	0.74	0.343	4.000	0.048	6.770	1.68	4.24	J
AL 2940	B 9	8.7	127.0	0.81	393.9	2.46	0.06	0.343	5.000	0.032	15.507	0.55	0.37	K
AL 3040	B 9	8.7	127.0	0.91	324.0	3.40	0.12	0.343	5.000	0.036	12.756	0.77	0.69	K
AL 3140	B 9	8.7	127.0	1.02	276.6	4.55	0.21	0.343	5.000	0.040	10.888	1.02	1.22	K
AL 3240	B 9	8.7	127.0	1.22	218.3	7.47	0.57	0.343	5.000	0.048	8.594	1.68	3.27	K
AL 2948	B 9	8.7	152.4	0.81	480.7	2.46	0.05	0.343	6.000	0.032	18.924	0.55	0.30	L
AL 3048	B 9	8.7	152.4	0.91	394.7	3.40	0.10	0.343	6.000	0.036	15.539	0.77	0.56	L
AL 3148	B 9	8.7	152.4	1.02	336.3	4.55	0.17	0.343	6.000	0.040	13.241	1.02	0.99	L
AL 3248	B 9	8.7	152.4	1.22	264.6	7.47	0.47	0.343	6.000	0.048	10.418	1.68	2.66	L
AM 3010	C 1	9.5	31.8	0.91	61.8	3.13	0.73	0.375	1.250	0.036	2.432	0.70	4.16	F
AM 3110	C 1	9.5	31.8	1.02	54.8	4.18	1.27	0.375	1.250	0.040	2.158	0.94	7.25	F
AM 3210	C 1	9.5	31.8	1.22	46.2	6.89	3.35	0.375	1.250	0.048	1.817	1.55	19.12	F
AM 3310	C 1	9.5	31.8	1.42	41.3	10.50	7.68	0.375	1.250	0.056	1.627	2.36	43.87	F
AM 3012	C 1	9.5	38.1	0.91	82.1	3.13	0.50	0.375	1.500	0.036	3.234	0.70	2.84	F
AM 3112	C 1	9.5	38.1	1.02	71.8	4.18	0.87	0.375	1.500	0.040	2.828	0.94	4.96	F
AM 3212	C 1	9.5	38.1	1.22	59.1	6.89	2.30	0.375	1.500	0.048	2.326	1.55	13.13	F
AM 3312	C 1	9.5	38.1	1.42	52.0	10.50	5.30	0.375	1.500	0.056	2.046	2.36	30.26	G
AM 3016	C 1	9.5	50.8	0.91	122.9	3.13	0.30	0.375	2.000	0.036	4.837	0.70	1.74	G
AM 3116	C 1	9.5	50.8	1.02	105.9	4.18	0.53	0.375	2.000	0.040	4.169	0.94	3.04	G
AM 3216	C 1	9.5	50.8	1.22	84.9	6.89	1.41	0.375	2.000	0.048	3.343	1.55	8.07	G
AM 3316	C 1	9.5	50.8	1.42	73.3	10.50	3.27	0.375	2.000	0.056	2.885	2.36	18.68	G
AM 3020	C 1	9.5	63.5	0.91	163.6	3.13	0.22	0.375	2.500	0.036	6.440	0.70	1.25	G
AM 3120	C 1	9.5	63.5	1.02	139.9	4.18	0.38	0.375	2.500	0.040	5.509	0.94	2.19	G
AM 3220	C 1	9.5	63.5	1.22	110.8	6.89	1.02	0.375	2.500	0.048	4.361	1.55	5.83	G
AM 3320	C 1	9.5	63.5	1.42	94.6	10.50	2.37	0.375	2.500	0.056	3.723	2.36	13.51	H
AM 3024	C 1	9.5	76.2	0.91	204.3	3.13	0.17	0.375	3.000	0.036	8.043	0.70	0.98	H
AM 3124	C 1	9.5	76.2	1.02	174.0	4.18	0.30	0.375	3.000	0.040	6.850	0.94	1.71	H
AM 3224	C 1	9.5	76.2	1.22	136.6	6.89	0.80	0.375	3.000	0.048	5.378	1.55	4.56	H
AM 3324	C 1	9.5	76.2	1.42	115.9	10.50	1.85	0.375	3.000	0.056	4.562	2.36	10.58	H
AM 3032	C 1	9.5	101.6	0.91	285.7	3.13	0.12	0.375	4.000	0.036	11.249	0.70	0.68	J
AM 3132	C 1	9.5	101.6	1.02	242.1	4.18	0.21	0.375	4.000	0.040	9.531	0.94	1.19	J
AM 3232	C 1	9.5	101.6	1.22	188.3	6.89	0.56	0.375	4.000	0.048	7.413	1.55	3.18	J
AM 3332	C 1	9.5	101.6	1.42	158.5	10.50	1.29	0.375	4.000	0.056	6.239	2.36	7.38	J
AM 3040	C 1	9.5	127.0	0.91	367.2	3.13	0.09	0.375	5.000	0.036	14.455	0.70	0.52	K
AM 3140	C 1	9.5	127.0	1.02	310.2	4.18	0.16	0.375	5.000	0.040	12.213	0.94	0.91	K
AM 3240	C 1	9.5	127.0	1.22	240.0	6.89	0.43	0.375	5.000	0.048	9.448	1.55	2.44	K
AM 3340	C 1	9.5	127.0	1.42	201.1	10.50	0.99	0.375	5.000	0.056	7.917	2.36	5.66	K
AM 3048	C 1	9.5	152.4	0.91	448.6	3.13	0.07	0.375	6.000	0.036	17.661	0.70	0.42	L
AM 3148	C 1	9.5	152.4	1.02	378.3	4.18	0.13	0.375	6.000	0.040	14.894	0.94	0.74	L

For Sales or Assistance - Tel 0117 967 3313

All characteristics are nominal

Extension Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						PRICE BAND
		Outside Dia.	Free Lth.	Wire Size	Extended Lth.	Initial Tension	Rate	Outside Dia.	Free Lth.	Wire Size	Extended Lth.	Initial Tension	Rate	
		mm	mm	mm	mm	N	N/mm	inches	inches	inches	inches	Lbs	Lbs/in	
AM 3248	C 1	9.5	152.4	1.22	291.7	6.89	0.35	0.375	6.000	0.048	11.482	1.55	1.98	L
AM 3348	C 1	9.5	152.4	1.42	243.7	10.50	0.81	0.375	6.000	0.056	9.594	2.36	4.60	L
MM 5708	C 2	10.0	40.0	1.22	64.8	6.59	1.86	0.394	1.575	0.048	2.551	1.48	10.61	F
MM 5710	C 2	10.0	50.0	1.22	86.5	6.59	1.26	0.394	1.969	0.048	3.405	1.48	7.21	G
MM 5712	C 2	10.0	60.0	1.22	108.2	6.59	0.96	0.394	2.362	0.048	4.259	1.48	5.46	G
MM 5714	C 2	10.0	70.0	1.22	129.9	6.59	0.77	0.394	2.756	0.048	5.113	1.48	4.40	H
MM 5716	C 2	10.0	80.0	1.22	151.6	6.59	0.64	0.394	3.150	0.048	5.967	1.48	3.68	H
MM 5720	C 2	10.0	100.0	1.22	195.0	6.59	0.49	0.394	3.937	0.048	7.675	1.48	2.77	J
MM 5724	C 2	10.0	120.0	1.22	238.3	6.59	0.39	0.394	4.724	0.048	9.383	1.48	2.22	K
MM 5728	C 2	10.0	140.0	1.22	281.7	6.59	0.33	0.394	5.512	0.048	11.091	1.48	1.86	L
AN 3112	C 3	11.1	38.1	1.02	79.0	3.62	0.62	0.437	1.500	0.040	3.112	0.81	3.53	F
AN 3212	C 3	11.1	38.1	1.22	64.0	5.98	1.62	0.437	1.500	0.048	2.519	1.34	9.23	F
AN 3312	C 3	11.1	38.1	1.42	55.5	9.14	3.68	0.437	1.500	0.056	2.186	2.06	20.99	G
AN 3412	C 3	11.1	38.1	1.63	50.3	13.12	7.55	0.437	1.500	0.064	1.979	2.95	43.11	G
AN 3116	C 3	11.1	50.8	1.02	122.5	3.62	0.35	0.437	2.000	0.040	4.822	0.81	2.02	G
AN 3216	C 3	11.1	50.8	1.22	95.9	5.98	0.93	0.437	2.000	0.048	3.774	1.34	5.30	G
AN 3316	C 3	11.1	50.8	1.42	81.0	9.14	2.12	0.437	2.000	0.056	3.188	2.06	12.11	H
AN 3416	C 3	11.1	50.8	1.63	71.8	13.12	4.38	0.437	2.000	0.064	2.826	2.95	25.00	H
AN 3120	C 3	11.1	63.5	1.02	165.9	3.62	0.25	0.437	2.500	0.040	6.532	0.81	1.41	G
AN 3220	C 3	11.1	63.5	1.22	127.8	5.98	0.65	0.437	2.500	0.048	5.030	1.34	3.72	G
AN 3320	C 3	11.1	63.5	1.42	106.4	9.14	1.49	0.437	2.500	0.056	4.191	2.06	8.51	H
AN 3420	C 3	11.1	63.5	1.63	93.3	13.12	3.08	0.437	2.500	0.064	3.673	2.95	17.60	J
AN 3124	C 3	11.1	76.2	1.02	209.3	3.62	0.19	0.437	3.000	0.040	8.242	0.81	1.09	H
AN 3224	C 3	11.1	76.2	1.22	159.7	5.98	0.50	0.437	3.000	0.048	6.286	1.34	2.86	H
AN 3324	C 3	11.1	76.2	1.42	131.9	9.14	1.15	0.437	3.000	0.056	5.193	2.06	6.56	J
AN 3424	C 3	11.1	76.2	1.63	114.8	13.12	2.38	0.437	3.000	0.064	4.520	2.95	13.58	J
AN 3132	C 3	11.1	101.6	1.02	296.2	3.62	0.13	0.437	4.000	0.040	11.662	0.81	0.74	K
AN 3232	C 3	11.1	101.6	1.22	223.4	5.98	0.34	0.437	4.000	0.048	8.797	1.34	1.96	K
AN 3332	C 3	11.1	101.6	1.42	182.8	9.14	0.79	0.437	4.000	0.056	7.199	2.06	4.50	K
AN 3432	C 3	11.1	101.6	1.63	157.8	13.12	1.63	0.437	4.000	0.064	6.214	2.95	9.32	K
AN 3140	C 3	11.1	127.0	1.02	383.1	3.62	0.10	0.437	5.000	0.040	15.082	0.81	0.56	L
AN 3240	C 3	11.1	127.0	1.22	287.2	5.98	0.26	0.437	5.000	0.048	11.309	1.34	1.49	L
AN 3340	C 3	11.1	127.0	1.42	233.8	9.14	0.60	0.437	5.000	0.056	9.204	2.06	3.42	L
AN 3440	C 3	11.1	127.0	1.63	200.9	13.12	1.24	0.437	5.000	0.064	7.908	2.95	7.10	L
AN 3148	C 3	11.1	152.4	1.02	469.9	3.62	0.08	0.437	6.000	0.040	18.502	0.81	0.46	M
AN 3248	C 3	11.1	152.4	1.22	351.0	5.98	0.21	0.437	6.000	0.048	13.820	1.34	1.20	M
AN 3348	C 3	11.1	152.4	1.42	284.7	9.14	0.48	0.437	6.000	0.056	11.209	2.06	2.76	M
AN 3448	C 3	11.1	152.4	1.63	243.9	13.12	1.00	0.437	6.000	0.064	9.602	2.95	5.73	M
AN 3156	C 3	11.1	177.8	1.02	556.8	3.62	0.07	0.437	7.000	0.040	21.922	0.81	0.38	N
AN 3256	C 3	11.1	177.8	1.22	414.8	5.98	0.18	0.437	7.000	0.048	16.331	1.34	1.01	N
AN 3356	C 3	11.1	177.8	1.42	335.6	9.14	0.41	0.437	7.000	0.056	13.214	2.06	2.32	N
AN 3456	C 3	11.1	177.8	1.63	286.9	13.12	0.84	0.437	7.000	0.064	11.296	2.95	4.81	N
MO 6010	C 4	12.0	50.0	1.50	79.0	9.78	2.36	0.472	1.969	0.059	3.109	2.20	13.50	H
MO 6012	C 4	12.0	60.0	1.50	99.5	9.78	1.73	0.472	2.362	0.059	3.917	2.20	9.90	H
MO 6014	C 4	12.0	70.0	1.50	120.0	9.78	1.37	0.472	2.756	0.059	4.725	2.20	7.82	J
MO 6016	C 4	12.0	80.0	1.50	140.6	9.78	1.13	0.472	3.150	0.059	5.534	2.20	6.46	J
MO 6020	C 4	12.0	100.0	1.50	181.6	9.78	0.84	0.472	3.937	0.059	7.150	2.20	4.79	K
MO 6024	C 4	12.0	120.0	1.50	222.7	9.78	0.67	0.472	4.724	0.059	8.767	2.20	3.81	L
MO 6028	C 4	12.0	140.0	1.50	263.7	9.78	0.55	0.472	5.512	0.059	10.383	2.20	3.16	M
MO 6032	C 4	12.0	160.0	1.50	304.8	9.78	0.47	0.472	6.299	0.059	12.000	2.20	2.70	N
AP 3312	C 5	12.7	38.1	1.42	57.9	8.07	2.85	0.500	1.500	0.056	2.281	1.81	16.27	G

Choose from millions of sizes - www.flexosprings.com

Extension Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						PRICE BAND
		Outside Dia.	Free Lth.	Wire Size	Extended Lth.	Initial Tension	Rate	Outside Dia.	Free Lth.	Wire Size	Extended Lth.	Initial Tension	Rate	
		mm	mm	mm	mm	N	N/mm	inches	inches	inches	inches	lbs	lbs/in	
AP 3412	C 5	12.7	38.1	1.63	52.2	11.62	5.78	0.500	1.500	0.064	2.054	2.61	33.02	G
AP 3512	C 5	12.7	38.1	1.83	48.4	16.00	10.86	0.500	1.500	0.072	1.906	3.60	62.03	H
AP 3612	C 5	12.7	38.1	2.03	45.9	21.31	19.20	0.500	1.500	0.080	1.806	4.79	109.63	H
AP 3316	C 5	12.7	50.8	1.42	88.5	8.07	1.50	0.500	2.000	0.056	3.483	1.81	8.57	H
AP 3416	C 5	12.7	50.8	1.63	77.3	11.62	3.07	0.500	2.000	0.064	3.044	2.61	17.50	H
AP 3516	C 5	12.7	50.8	1.83	70.1	16.00	5.80	0.500	2.000	0.072	2.761	3.60	33.10	H
AP 3616	C 5	12.7	50.8	2.03	65.3	21.31	10.31	0.500	2.000	0.080	2.570	4.79	58.88	H
AP 3320	C 5	12.7	63.5	1.42	119.0	8.07	1.02	0.500	2.500	0.056	4.685	1.81	5.81	J
AP 3420	C 5	12.7	63.5	1.63	102.5	11.62	2.09	0.500	2.500	0.064	4.035	2.61	11.91	J
AP 3520	C 5	12.7	63.5	1.83	91.8	16.00	3.95	0.500	2.500	0.072	3.616	3.60	22.57	J
AP 3620	C 5	12.7	63.5	2.03	84.7	21.31	7.05	0.500	2.500	0.080	3.333	4.79	40.24	J
AP 3324	C 5	12.7	76.2	1.42	149.5	8.07	0.77	0.500	3.000	0.056	5.887	1.81	4.40	K
AP 3424	C 5	12.7	76.2	1.63	127.7	11.62	1.58	0.500	3.000	0.064	5.026	2.61	9.02	K
AP 3524	C 5	12.7	76.2	1.83	113.6	16.00	3.00	0.500	3.000	0.072	4.471	3.60	17.12	K
AP 3624	C 5	12.7	76.2	2.03	104.1	21.31	5.35	0.500	3.000	0.080	4.097	4.79	30.57	K
AP 3332	C 5	12.7	101.6	1.42	210.6	8.07	0.52	0.500	4.000	0.056	8.291	1.81	2.96	L
AP 3432	C 5	12.7	101.6	1.63	178.0	11.62	1.06	0.500	4.000	0.064	7.007	2.61	6.08	L
AP 3532	C 5	12.7	101.6	1.83	157.0	16.00	2.02	0.500	4.000	0.072	6.180	3.60	11.55	L
AP 3632	C 5	12.7	101.6	2.03	142.9	21.31	3.62	0.500	4.000	0.080	5.625	4.79	20.64	L
AP 3340	C 5	12.7	127.0	1.42	271.7	8.07	0.39	0.500	5.000	0.056	10.695	1.81	2.23	M
AP 3440	C 5	12.7	127.0	1.63	228.3	11.62	0.80	0.500	5.000	0.064	8.989	2.61	4.58	M
AP 3540	C 5	12.7	127.0	1.83	200.4	16.00	1.53	0.500	5.000	0.072	7.890	3.60	8.71	M
AP 3640	C 5	12.7	127.0	2.03	181.7	21.31	2.73	0.500	5.000	0.080	7.152	4.79	15.58	M
AP 3348	C 5	12.7	152.4	1.42	332.7	8.07	0.31	0.500	6.000	0.056	13.100	1.81	1.79	N
AP 3448	C 5	12.7	152.4	1.63	278.6	11.62	0.64	0.500	6.000	0.064	10.970	2.61	3.68	N
AP 3548	C 5	12.7	152.4	1.83	243.8	16.00	1.23	0.500	6.000	0.072	9.600	3.60	7.00	N
AP 3648	C 5	12.7	152.4	2.03	220.5	21.31	2.19	0.500	6.000	0.080	8.680	4.79	12.52	N
AP 3356	C 5	12.7	177.8	1.42	393.8	8.07	0.26	0.500	7.000	0.056	15.504	1.81	1.49	P
AP 3456	C 5	12.7	177.8	1.63	329.0	11.62	0.54	0.500	7.000	0.064	12.951	2.61	3.07	P
AP 3556	C 5	12.7	177.8	1.83	287.3	16.00	1.02	0.500	7.000	0.072	11.309	3.60	5.84	P
AP 3656	C 5	12.7	177.8	2.03	259.3	21.31	1.83	0.500	7.000	0.080	10.207	4.79	10.46	P
AQ 3312	C 7	14.3	38.1	1.42	58.5	7.23	2.48	0.562	1.500	0.056	2.304	1.63	14.15	G
AQ 3412	C 7	14.3	38.1	1.63	52.8	10.42	4.97	0.562	1.500	0.064	2.078	2.34	28.41	G
AQ 3512	C 7	14.3	38.1	1.83	49.0	14.39	9.24	0.562	1.500	0.072	1.929	3.24	52.78	H
AQ 3612	C 7	14.3	38.1	2.03	46.4	19.23	16.16	0.562	1.500	0.080	1.828	4.32	92.26	H
AQ 3316	C 7	14.3	50.8	1.42	94.9	7.23	1.15	0.562	2.000	0.056	3.735	1.63	6.56	H
AQ 3416	C 7	14.3	50.8	1.63	82.1	10.42	2.33	0.562	2.000	0.064	3.234	2.34	13.30	H
AQ 3516	C 7	14.3	50.8	1.83	73.9	14.39	4.37	0.562	2.000	0.072	2.908	3.24	24.94	H
AQ 3616	C 7	14.3	50.8	2.03	68.3	19.23	7.71	0.562	2.000	0.080	2.688	4.32	44.01	H
MQ 6212	C 7	14.0	60.0	1.70	97.3	11.97	2.24	0.551	2.362	0.067	3.832	2.69	12.82	J
AQ 3320	C 7	14.3	63.5	1.42	131.2	7.23	0.75	0.562	2.500	0.056	5.166	1.63	4.27	J
AQ 3420	C 7	14.3	63.5	1.63	111.5	10.42	1.52	0.562	2.500	0.064	4.390	2.34	8.68	J
AQ 3520	C 7	14.3	63.5	1.83	98.7	14.39	2.86	0.562	2.500	0.072	3.887	3.24	16.33	J
AQ 3620	C 7	14.3	63.5	2.03	90.1	19.23	5.06	0.562	2.500	0.080	3.547	4.32	28.89	J
MQ 6214	C 7	14.0	70.0	1.70	118.4	11.97	1.73	0.551	2.756	0.067	4.662	2.69	9.88	K
AQ 3324	C 7	14.3	76.2	1.42	167.6	7.23	0.55	0.562	3.000	0.056	6.597	1.63	3.16	K
AQ 3424	C 7	14.3	76.2	1.63	140.9	10.42	1.13	0.562	3.000	0.064	5.546	2.34	6.44	K
AQ 3524	C 7	14.3	76.2	1.83	123.6	14.39	2.13	0.562	3.000	0.072	4.866	3.24	12.14	K
AQ 3624	C 7	14.3	76.2	2.03	111.9	19.23	3.77	0.562	3.000	0.080	4.407	4.32	21.51	K
MQ 6216	C 7	14.0	80.0	1.70	139.5	11.97	1.41	0.551	3.150	0.067	5.492	2.69	8.04	K
MQ 6220	C 7	14.0	100.0	1.70	181.6	11.97	1.03	0.551	3.937	0.067	7.152	2.69	5.86	L

For Sales or Assistance - Tel 0117 967 3313

All characteristics are nominal

Extension Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						PRICE BAND
		Outside Dia.	Free Lth.	Wire Size	Extended Lth.	Initial Tension	Rate	Outside Dia.	Free Lth.	Wire Size	Extended Lth.	Initial Tension	Rate	
		mm	mm	mm	mm	N	N/mm	inches	inches	inches	inches	Lbs	Lbs/in	
AQ 3332	C 7	14.3	101.6	1.42	240.2	7.23	0.37	0.562	4.000	0.056	9.458	1.63	2.08	L
AQ 3432	C 7	14.3	101.6	1.63	199.6	10.42	0.74	0.562	4.000	0.064	7.859	2.34	4.25	L
AQ 3532	C 7	14.3	101.6	1.83	173.3	14.39	1.40	0.562	4.000	0.072	6.824	3.24	8.02	L
AQ 3632	C 7	14.3	101.6	2.03	155.6	19.23	2.49	0.562	4.000	0.080	6.126	4.32	14.23	L
MQ 6224	C 7	14.0	120.0	1.70	223.8	11.97	0.81	0.551	4.724	0.067	8.811	2.69	4.61	M
AQ 3340	C 7	14.3	127.0	1.42	312.9	7.23	0.27	0.562	5.000	0.056	12.320	1.63	1.55	M
AQ 3440	C 7	14.3	127.0	1.63	258.4	10.42	0.56	0.562	5.000	0.064	10.171	2.34	3.17	M
AQ 3540	C 7	14.3	127.0	1.83	223.1	14.39	1.05	0.562	5.000	0.072	8.782	3.24	5.99	M
AQ 3640	C 7	14.3	127.0	2.03	199.3	19.23	1.86	0.562	5.000	0.080	7.845	4.32	10.63	M
MQ 6228	C 7	14.0	140.0	1.70	266.0	11.97	0.67	0.551	5.512	0.067	10.471	2.69	3.80	N
AQ 3348	C 7	14.3	152.4	1.42	385.6	7.23	0.22	0.562	6.000	0.056	15.181	1.63	1.24	N
AQ 3448	C 7	14.3	152.4	1.63	317.1	10.42	0.44	0.562	6.000	0.064	12.484	2.34	2.53	N
AQ 3548	C 7	14.3	152.4	1.83	272.8	14.39	0.84	0.562	6.000	0.072	10.740	3.24	4.78	N
AQ 3648	C 7	14.3	152.4	2.03	242.9	19.23	1.49	0.562	6.000	0.080	9.564	4.32	8.49	N
MQ 6232	C 7	14.0	160.0	1.70	308.1	11.97	0.57	0.551	6.299	0.067	12.131	2.69	3.23	P
AQ 3356	C 7	14.3	177.8	1.42	458.3	7.23	0.18	0.562	7.000	0.056	18.043	1.63	1.03	P
AQ 3456	C 7	14.3	177.8	1.63	375.8	10.42	0.37	0.562	7.000	0.064	14.796	2.34	2.10	P
AQ 3556	C 7	14.3	177.8	1.83	322.5	14.39	0.70	0.562	7.000	0.072	12.698	3.24	3.98	P
AQ 3656	C 7	14.3	177.8	2.03	286.6	19.23	1.24	0.562	7.000	0.080	11.283	4.32	7.06	P
MQ 6236	C 7	14.0	180.0	1.70	350.3	11.97	0.49	0.551	7.087	0.067	13.791	2.69	2.81	Q
AQ 3364	C 7	14.3	203.2	1.42	531.0	7.23	0.15	0.562	8.000	0.056	20.905	1.63	0.88	Q
AQ 3464	C 7	14.3	203.2	1.63	434.6	10.42	0.32	0.562	8.000	0.064	17.109	2.34	1.80	Q
AQ 3564	C 7	14.3	203.2	1.83	372.3	14.39	0.60	0.562	8.000	0.072	14.656	3.24	3.40	Q
AQ 3664	C 7	14.3	203.2	2.03	330.3	19.23	1.06	0.562	8.000	0.080	13.003	4.32	6.05	Q
AQ 3372	C 7	14.3	228.6	1.42	603.7	7.23	0.13	0.562	9.000	0.056	23.766	1.63	0.77	R
AQ 3472	C 7	14.3	228.6	1.63	493.3	10.42	0.28	0.562	9.000	0.064	19.421	2.34	1.57	R
AQ 3572	C 7	14.3	228.6	1.83	422.0	14.39	0.52	0.562	9.000	0.072	16.614	3.24	2.97	R
AQ 3672	C 7	14.3	228.6	2.03	373.9	19.23	0.93	0.562	9.000	0.080	14.722	4.32	5.29	R
AQ 3380	C 7	14.3	254.0	1.42	676.3	7.23	0.12	0.562	10.000	0.056	26.628	1.63	0.68	S
AQ 3480	C 7	14.3	254.0	1.63	552.0	10.42	0.24	0.562	10.000	0.064	21.734	2.34	1.40	S
AQ 3580	C 7	14.3	254.0	1.83	471.7	14.39	0.46	0.562	10.000	0.072	18.572	3.24	2.64	S
AQ 3680	C 7	14.3	254.0	2.03	417.6	19.23	0.82	0.562	10.000	0.080	16.441	4.32	4.70	S
AR 3412	C 9	15.9	38.1	1.63	51.6	9.43	4.88	0.625	1.500	0.064	2.033	2.12	27.84	G
AR 3512	C 9	15.9	38.1	1.83	48.3	13.05	8.95	0.625	1.500	0.072	1.902	2.93	51.08	H
AR 3612	C 9	15.9	38.1	2.03	46.0	17.46	15.44	0.625	1.500	0.080	1.812	3.93	88.19	H
AR 3712	C 9	15.9	38.1	2.34	43.7	25.46	32.04	0.625	1.500	0.092	1.719	5.72	182.97	H
AR 3416	C 9	15.9	50.8	1.63	85.9	9.43	1.88	0.625	2.000	0.064	3.382	2.12	10.74	H
AR 3516	C 9	15.9	50.8	1.83	76.9	13.05	3.50	0.625	2.000	0.072	3.026	2.93	20.01	H
AR 3616	C 9	15.9	50.8	2.03	70.7	17.46	6.14	0.625	2.000	0.080	2.784	3.93	35.06	J
AR 3716	C 9	15.9	50.8	2.34	64.5	25.46	13.02	0.625	2.000	0.092	2.539	5.72	74.32	J
AR 3420	C 9	15.9	63.5	1.63	120.2	9.43	1.17	0.625	2.500	0.064	4.731	2.12	6.65	J
AR 3520	C 9	15.9	63.5	1.83	105.4	13.05	2.18	0.625	2.500	0.072	4.150	2.93	12.44	J
AR 3620	C 9	15.9	63.5	2.03	95.4	17.46	3.83	0.625	2.500	0.080	3.756	3.93	21.88	K
AR 3720	C 9	15.9	63.5	2.34	85.3	25.46	8.17	0.625	2.500	0.092	3.359	5.72	46.63	K
MR 6414	C 9	16.0	70.0	1.90	116.0	14.41	2.19	0.630	2.756	0.075	4.565	3.24	12.53	K
AR 3424	C 9	15.9	76.2	1.63	154.4	9.43	0.84	0.625	3.000	0.064	6.080	2.12	4.82	K
AR 3524	C 9	15.9	76.2	1.83	134.0	13.05	1.58	0.625	3.000	0.072	5.274	2.93	9.03	K
AR 3624	C 9	15.9	76.2	2.03	120.1	17.46	2.79	0.625	3.000	0.080	4.728	3.93	15.90	K
AR 3724	C 9	15.9	76.2	2.34	106.2	25.46	5.95	0.625	3.000	0.092	4.179	5.72	33.97	L
MR 6416	C 9	16.0	80.0	1.90	137.5	14.41	1.75	0.630	3.150	0.075	5.412	3.24	10.02	L
MR 6420	C 9	16.0	100.0	1.90	180.5	14.41	1.25	0.630	3.937	0.075	7.106	3.24	7.15	M

Choose from millions of sizes - www.flexosprings.com

Extension Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						PRICE BAND
		Outside Dia.	Free Lth.	Wire Size	Extended Lth.	Initial Tension	Rate	Outside Dia.	Free Lth.	Wire Size	Extended Lth.	Initial Tension	Rate	
		mm	mm	mm	mm	N	N/mm	inches	inches	inches	inches	lbs	lbs/in	
AR 3432	C 9	15.9	101.6	1.63	223.0	9.43	0.54	0.625	4.000	0.064	8.778	2.12	3.11	M
AR 3532	C 9	15.9	101.6	1.83	191.1	13.05	1.02	0.625	4.000	0.072	7.522	2.93	5.83	M
AR 3632	C 9	15.9	101.6	2.03	169.5	17.46	1.80	0.625	4.000	0.080	6.672	3.93	10.28	M
AR 3732	C 9	15.9	101.6	2.34	147.8	25.46	3.86	0.625	4.000	0.092	5.819	5.72	22.02	M
MR 6424	C 9	16.0	120.0	1.90	223.5	14.41	0.97	0.630	4.724	0.075	8.801	3.24	5.56	N
AR 3440	C 9	15.9	127.0	1.63	291.5	9.43	0.40	0.625	5.000	0.064	11.476	2.12	2.29	N
AR 3540	C 9	15.9	127.0	1.83	248.2	13.05	0.75	0.625	5.000	0.072	9.770	2.93	4.30	N
AR 3640	C 9	15.9	127.0	2.03	218.8	17.46	1.33	0.625	5.000	0.080	8.616	3.93	7.60	N
AR 3740	C 9	15.9	127.0	2.34	189.5	25.46	2.85	0.625	5.000	0.092	7.460	5.72	16.29	N
MR 6428	C 9	16.0	140.0	1.90	266.6	14.41	0.80	0.630	5.512	0.075	10.495	3.24	4.55	N
AR 3448	C 9	15.9	152.4	1.63	360.0	9.43	0.32	0.625	6.000	0.064	14.174	2.12	1.82	P
AR 3548	C 9	15.9	152.4	1.83	305.3	13.05	0.60	0.625	6.000	0.072	12.018	2.93	3.41	P
AR 3648	C 9	15.9	152.4	2.03	268.2	17.46	1.06	0.625	6.000	0.080	10.560	3.93	6.03	P
AR 3748	C 9	15.9	152.4	2.34	231.1	25.46	2.26	0.625	6.000	0.092	9.100	5.72	12.92	P
MR 6432	C 9	16.0	160.0	1.90	309.6	14.41	0.67	0.630	6.299	0.075	12.189	3.24	3.85	P
AR 3456	C 9	15.9	177.8	1.63	428.5	9.43	0.26	0.625	7.000	0.064	16.872	2.12	1.50	Q
AR 3556	C 9	15.9	177.8	1.83	362.4	13.05	0.49	0.625	7.000	0.072	14.267	2.93	2.83	Q
AR 3656	C 9	15.9	177.8	2.03	317.6	17.46	0.87	0.625	7.000	0.080	12.504	3.93	4.99	Q
AR 3756	C 9	15.9	177.8	2.34	272.8	25.46	1.88	0.625	7.000	0.092	10.740	5.72	10.71	Q
MR 6436	C 9	16.0	180.0	1.90	352.6	14.41	0.58	0.630	7.087	0.075	13.883	3.24	3.34	Q
MR 6440	C 9	16.0	200.0	1.90	395.7	14.41	0.52	0.630	7.874	0.075	15.577	3.24	2.94	R
AR 3464	C 9	15.9	203.2	1.63	497.1	9.43	0.22	0.625	8.000	0.064	19.570	2.12	1.28	R
AR 3564	C 9	15.9	203.2	1.83	419.5	13.05	0.42	0.625	8.000	0.072	16.515	2.93	2.41	R
AR 3664	C 9	15.9	203.2	2.03	367.0	17.46	0.75	0.625	8.000	0.080	14.448	3.93	4.26	R
AR 3764	C 9	15.9	203.2	2.34	314.5	25.46	1.60	0.625	8.000	0.092	12.380	5.72	9.15	R
AR 3472	C 9	15.9	228.6	1.63	565.6	9.43	0.20	0.625	9.000	0.064	22.268	2.12	1.12	S
AR 3572	C 9	15.9	228.6	1.83	476.6	13.05	0.37	0.625	9.000	0.072	18.763	2.93	2.10	S
AR 3672	C 9	15.9	228.6	2.03	416.4	17.46	0.65	0.625	9.000	0.080	16.392	3.93	3.72	S
AR 3772	C 9	15.9	228.6	2.34	356.1	25.46	1.40	0.625	9.000	0.092	14.021	5.72	7.98	S
AR 3480	C 9	15.9	254.0	1.63	634.1	9.43	0.17	0.625	10.000	0.064	24.966	2.12	0.99	S
AR 3580	C 9	15.9	254.0	1.83	533.7	13.05	0.33	0.625	10.000	0.072	21.011	2.93	1.86	S
AR 3680	C 9	15.9	254.0	2.03	465.7	17.46	0.58	0.625	10.000	0.080	18.336	3.93	3.30	S
AR 3780	C 9	15.9	254.0	2.34	397.8	25.46	1.24	0.625	10.000	0.092	15.661	5.72	7.08	S
AT 3620	D 4	19.1	63.5	2.03	104.1	14.74	2.54	0.750	2.500	0.080	4.099	3.31	14.50	K
AT 3720	D 4	19.1	63.5	2.34	91.8	21.58	5.33	0.750	2.500	0.092	3.615	4.85	30.46	K
AT 3820	D 4	19.1	63.5	2.64	84.1	30.30	10.29	0.750	2.500	0.104	3.311	6.81	58.77	L
AT 3920	D 4	19.1	63.5	2.95	78.9	40.81	18.59	0.750	2.500	0.116	3.105	9.17	106.17	L
AT 3624	D 4	19.1	76.2	2.03	135.6	14.74	1.74	0.750	3.000	0.080	5.339	3.31	9.91	L
AT 3724	D 4	19.1	76.2	2.34	117.5	21.58	3.66	0.750	3.000	0.092	4.625	4.85	20.89	L
AT 3824	D 4	19.1	76.2	2.64	106.1	30.30	7.08	0.750	3.000	0.104	4.179	6.81	40.45	M
AT 3924	D 4	19.1	76.2	2.95	98.4	40.81	12.84	0.750	3.000	0.116	3.876	9.17	73.32	M
AT 3632	D 4	19.1	101.6	2.03	198.6	14.74	1.06	0.750	4.000	0.080	7.820	3.31	6.07	M
AT 3732	D 4	19.1	101.6	2.34	168.8	21.58	2.25	0.750	4.000	0.092	6.646	4.85	12.83	M
AT 3832	D 4	19.1	101.6	2.64	150.2	30.30	4.36	0.750	4.000	0.104	5.914	6.81	24.92	N
AT 3932	D 4	19.1	101.6	2.95	137.6	40.81	7.93	0.750	4.000	0.116	5.418	9.17	45.29	N
AT 3640	D 4	19.1	127.0	2.03	261.6	14.74	0.77	0.750	5.000	0.080	10.300	3.31	4.38	P
AT 3740	D 4	19.1	127.0	2.34	220.1	21.58	1.62	0.750	5.000	0.092	8.667	4.85	9.26	P
AT 3840	D 4	19.1	127.0	2.64	194.3	30.30	3.15	0.750	5.000	0.104	7.649	6.81	18.00	P
AT 3940	D 4	19.1	127.0	2.95	176.8	40.81	5.74	0.750	5.000	0.116	6.960	9.17	32.77	P
AT 3648	D 4	19.1	152.4	2.03	324.6	14.74	0.60	0.750	6.000	0.080	12.781	3.31	3.42	Q
AT 3748	D 4	19.1	152.4	2.34	271.5	21.58	1.27	0.750	6.000	0.092	10.688	4.85	7.24	Q

For Sales or Assistance - Tel 0117 967 3313

All characteristics are nominal

Extension Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						PRICE BAND
		Outside Dim.	Free Lth.	Wire Size	Extended Lth.	Initial Tension	Rate	Outside Dim.	Free Lth.	Wire Size	Extended Lth.	Initial Tension	Rate	
		mm	mm	mm	mm	N	N/mm	Inches	Inches	Inches	Inches	Lbs	Lbs/in	
AT 3848	D 4	19.1	152.4	2.64	238.3	30.30	2.47	0.750	6.000	0.104	9.384	6.81	14.09	Q
AT 3948	D 4	19.1	152.4	2.95	215.9	40.81	4.50	0.750	6.000	0.116	8.502	9.17	25.67	Q
AT 3656	D 4	19.1	177.8	2.03	387.6	14.74	0.49	0.750	7.000	0.080	15.261	3.31	2.81	R
AT 3756	D 4	19.1	177.8	2.34	322.8	21.58	1.04	0.750	7.000	0.092	12.709	4.85	5.95	R
AT 3856	D 4	19.1	177.8	2.64	282.4	30.30	2.03	0.750	7.000	0.104	11.118	6.81	11.58	R
AT 3956	D 4	19.1	177.8	2.95	255.1	40.81	3.69	0.750	7.000	0.116	10.044	9.17	21.10	R
AT 3664	D 4	19.1	203.2	2.03	450.6	14.74	0.42	0.750	8.000	0.080	17.742	3.31	2.38	S
AT 3764	D 4	19.1	203.2	2.34	374.1	21.58	0.88	0.750	8.000	0.092	14.729	4.85	5.05	S
AT 3864	D 4	19.1	203.2	2.64	326.5	30.30	1.72	0.750	8.000	0.104	12.853	6.81	9.82	S
AT 3964	D 4	19.1	203.2	2.95	294.3	40.81	3.14	0.750	8.000	0.116	11.585	9.17	17.91	S
AT 3672	D 4	19.1	228.6	2.03	513.6	14.74	0.36	0.750	9.000	0.080	20.222	3.31	2.07	T
AT 3772	D 4	19.1	228.6	2.34	425.5	21.58	0.77	0.750	9.000	0.092	16.750	4.85	4.38	T
AT 3872	D 4	19.1	228.6	2.64	370.5	30.30	1.49	0.750	9.000	0.104	14.588	6.81	8.53	T
AT 3972	D 4	19.1	228.6	2.95	333.4	40.81	2.72	0.750	9.000	0.116	13.127	9.17	15.56	T
AT 3680	D 4	19.1	254.0	2.03	576.7	14.74	0.32	0.750	10.000	0.080	22.703	3.31	1.83	U
AT 3780	D 4	19.1	254.0	2.34	476.8	21.58	0.68	0.750	10.000	0.092	18.771	4.85	3.87	U
AT 3880	D 4	19.1	254.0	2.64	414.6	30.30	1.32	0.750	10.000	0.104	16.323	6.81	7.54	U
AT 3980	D 4	19.1	254.0	2.95	372.6	40.81	2.41	0.750	10.000	0.116	14.669	9.17	13.75	U
AT 3688	D 4	19.1	279.4	2.03	639.7	14.74	0.29	0.750	11.000	0.080	25.183	3.31	1.63	U
AT 3788	D 4	19.1	279.4	2.34	528.1	21.58	0.61	0.750	11.000	0.092	20.792	4.85	3.47	U
AT 3888	D 4	19.1	279.4	2.64	458.7	30.30	1.18	0.750	11.000	0.104	18.058	6.81	6.76	V
AT 3988	D 4	19.1	279.4	2.95	411.8	40.81	2.16	0.750	11.000	0.116	16.211	9.17	12.32	V
AT 3696	D 4	19.1	304.8	2.03	702.7	14.74	0.26	0.750	12.000	0.080	27.664	3.31	1.48	V
AT 3796	D 4	19.1	304.8	2.34	579.4	21.58	0.55	0.750	12.000	0.092	22.813	4.85	3.14	V
AT 3896	D 4	19.1	304.8	2.64	502.7	30.30	1.07	0.750	12.000	0.104	19.793	6.81	6.12	V
AT 3996	D 4	19.1	304.8	2.95	450.9	40.81	1.95	0.750	12.000	0.116	17.753	9.17	11.16	V
MU 6516	D 5	20.0	80.0	2.03	150.0	14.07	1.41	0.787	3.150	0.080	5.904	3.16	8.04	L
MU 6916	D 5	20.0	80.0	2.50	120.9	24.84	4.25	0.787	3.150	0.098	4.760	5.58	24.27	M
MU 6520	D 5	20.0	100.0	2.03	203.2	14.07	0.95	0.787	3.937	0.080	8.002	3.16	5.45	M
MU 6920	D 5	20.0	100.0	2.50	160.2	24.84	2.89	0.787	3.937	0.098	6.305	5.58	16.50	N
MU 6524	D 5	20.0	120.0	2.03	256.5	14.07	0.72	0.787	4.724	0.080	10.100	3.16	4.12	N
MU 6924	D 5	20.0	120.0	2.50	199.4	24.84	2.19	0.787	4.724	0.098	7.851	5.58	12.50	P
MU 6528	D 5	20.0	140.0	2.03	309.8	14.07	0.58	0.787	5.512	0.080	12.197	3.16	3.31	P
MU 6928	D 5	20.0	140.0	2.50	238.7	24.84	1.76	0.787	5.512	0.098	9.396	5.58	10.06	Q
MU 6532	D 5	20.0	160.0	2.03	363.1	14.07	0.49	0.787	6.299	0.080	14.295	3.16	2.77	Q
MU 6932	D 5	20.0	160.0	2.50	277.9	24.84	1.47	0.787	6.299	0.098	10.941	5.58	8.42	R
MU 6536	D 5	20.0	180.0	2.03	416.4	14.07	0.42	0.787	7.087	0.080	16.393	3.16	2.38	R
MU 6936	D 5	20.0	180.0	2.50	317.2	24.84	1.27	0.787	7.087	0.098	12.487	5.58	7.24	S
MU 6540	D 5	20.0	200.0	2.03	469.7	14.07	0.37	0.787	7.874	0.080	18.491	3.16	2.09	S
MU 6940	D 5	20.0	200.0	2.50	356.4	24.84	1.11	0.787	7.874	0.098	14.032	5.58	6.35	S
MU 6544	D 5	20.0	220.0	2.03	523.0	14.07	0.33	0.787	8.661	0.080	20.589	3.16	1.86	T
MU 6944	D 5	20.0	220.0	2.50	395.7	24.84	0.99	0.787	8.661	0.098	15.577	5.58	5.65	T
AV 3724	D 7	22.2	76.2	2.34	127.0	18.68	2.58	0.875	3.000	0.092	4.999	4.20	14.71	L
AV 3824	D 7	22.2	76.2	2.64	113.5	26.31	4.94	0.875	3.000	0.104	4.469	5.92	28.19	M
AV 3924	D 7	22.2	76.2	2.95	104.3	35.55	8.85	0.875	3.000	0.116	4.107	7.99	50.56	M
AV 4024	D 7	22.2	76.2	3.25	97.8	46.44	15.06	0.875	3.000	0.128	3.850	10.44	86.00	N
AV 3732	D 7	22.2	101.6	2.34	190.2	18.68	1.48	0.875	4.000	0.092	7.488	4.20	8.43	N
AV 3832	D 7	22.2	101.6	2.64	166.5	26.31	2.84	0.875	4.000	0.104	6.554	5.92	16.21	N
AV 3932	D 7	22.2	101.6	2.95	150.3	35.55	5.11	0.875	4.000	0.116	5.917	7.99	29.19	P
AV 4032	D 7	22.2	101.6	3.25	138.9	46.44	8.73	0.875	4.000	0.128	5.467	10.44	49.83	P
AV 3740	D 7	22.2	127.0	2.34	253.4	18.68	1.03	0.875	5.000	0.092	9.978	4.20	5.91	Q

Choose from millions of sizes - www.flexosprings.com

Extension Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						PRICE BAND
		Outside Dia.	Free Lth.	Wire Size	Extended Lth.	Initial Tension	Rate	Outside Dia.	Free Lth.	Wire Size	Extended Lth.	Initial Tension	Rate	
		mm	mm	mm	mm	N	N/mm	inches	inches	inches	inches	lbs	lbs/in	
AV 3840	D 7	22.2	127.0	2.64	219.4	26.31	1.99	0.875	5.000	0.104	8.639	5.92	11.38	Q
AV 3940	D 7	22.2	127.0	2.95	196.3	35.55	3.59	0.875	5.000	0.116	7.727	7.99	20.52	Q
AV 4040	D 7	22.2	127.0	3.25	179.9	46.44	6.14	0.875	5.000	0.128	7.083	10.44	35.08	Q
AV 3748	D 7	22.2	152.4	2.34	316.7	18.68	0.80	0.875	6.000	0.092	12.468	4.20	4.55	R
AV 3848	D 7	22.2	152.4	2.64	272.4	26.31	1.54	0.875	6.000	0.104	10.724	5.92	8.77	R
AV 3948	D 7	22.2	152.4	2.95	242.2	35.55	2.77	0.875	6.000	0.116	9.537	7.99	15.82	R
AV 4048	D 7	22.2	152.4	3.25	221.0	46.44	4.74	0.875	6.000	0.128	8.700	10.44	27.07	S
AV 3756	D 7	22.2	177.8	2.34	379.9	18.68	0.65	0.875	7.000	0.092	14.957	4.20	3.69	S
AV 3856	D 7	22.2	177.8	2.64	325.3	26.31	1.25	0.875	7.000	0.104	12.808	5.92	7.13	S
AV 3956	D 7	22.2	177.8	2.95	288.2	35.55	2.25	0.875	7.000	0.116	11.347	7.99	12.87	S
AV 4056	D 7	22.2	177.8	3.25	262.0	46.44	3.86	0.875	7.000	0.128	10.317	10.44	22.04	T
AV 3764	D 7	22.2	203.2	2.34	443.1	18.68	0.55	0.875	8.000	0.092	17.447	4.20	3.11	T
AV 3864	D 7	22.2	203.2	2.64	378.3	26.31	1.05	0.875	8.000	0.104	14.893	5.92	6.01	T
AV 3964	D 7	22.2	203.2	2.95	334.2	35.55	1.90	0.875	8.000	0.116	13.157	7.99	10.85	T
AV 4064	D 7	22.2	203.2	3.25	303.1	46.44	3.25	0.875	8.000	0.128	11.933	10.44	18.58	U
AV 3772	D 7	22.2	228.6	2.34	506.4	18.68	0.47	0.875	9.000	0.092	19.936	4.20	2.69	U
AV 3872	D 7	22.2	228.6	2.64	431.2	26.31	0.91	0.875	9.000	0.104	16.978	5.92	5.19	U
AV 3972	D 7	22.2	228.6	2.95	380.2	35.55	1.64	0.875	9.000	0.116	14.967	7.99	9.38	U
AV 4072	D 7	22.2	228.6	3.25	344.2	46.44	2.81	0.875	9.000	0.128	13.550	10.44	16.06	V
AV 3780	D 7	22.2	254.0	2.34	569.6	18.68	0.41	0.875	10.000	0.092	22.426	4.20	2.37	V
AV 3880	D 7	22.2	254.0	2.64	484.2	26.31	0.80	0.875	10.000	0.104	19.063	5.92	4.57	V
AV 3980	D 7	22.2	254.0	2.95	426.1	35.55	1.45	0.875	10.000	0.116	16.777	7.99	8.25	V
AV 4080	D 7	22.2	254.0	3.25	385.2	46.44	2.48	0.875	10.000	0.128	15.167	10.44	14.14	W
AV 3788	D 7	22.2	279.4	2.34	632.8	18.68	0.37	0.875	11.000	0.092	24.915	4.20	2.11	V
AV 3888	D 7	22.2	279.4	2.64	537.2	26.31	0.71	0.875	11.000	0.104	21.148	5.92	4.08	W
AV 3988	D 7	22.2	279.4	2.95	472.1	35.55	1.29	0.875	11.000	0.116	18.587	7.99	7.37	W
AV 4088	D 7	22.2	279.4	3.25	426.3	46.44	2.21	0.875	11.000	0.128	16.784	10.44	12.64	W
AV 3796	D 7	22.2	304.8	2.34	696.1	18.68	0.33	0.875	12.000	0.092	27.405	4.20	1.91	W
AV 3896	D 7	22.2	304.8	2.64	590.1	26.31	0.65	0.875	12.000	0.104	23.233	5.92	3.69	W
AV 3996	D 7	22.2	304.8	2.95	518.1	35.55	1.17	0.875	12.000	0.116	20.397	7.99	6.66	X
AV 4096	D 7	22.2	304.8	3.25	467.4	46.44	2.00	0.875	12.000	0.128	18.400	10.44	11.42	X
MW 6920	D 8	24.0	100.0	2.50	182.1	20.95	1.79	0.945	3.937	0.098	7.168	4.71	10.20	N
MW 7220	D 8	24.0	100.0	3.00	151.4	34.71	4.73	0.945	3.937	0.118	5.960	7.80	27.00	P
MW 6924	D 8	24.0	120.0	2.50	232.2	20.95	1.31	0.945	4.724	0.098	9.141	4.71	7.47	P
MW 7224	D 8	24.0	120.0	3.00	190.1	34.71	3.47	0.945	4.724	0.118	7.483	7.80	19.80	Q
MW 6928	D 8	24.0	140.0	2.50	282.3	20.95	1.03	0.945	5.512	0.098	11.114	4.71	5.89	Q
MW 7228	D 8	24.0	140.0	3.00	228.7	34.71	2.74	0.945	5.512	0.118	9.006	7.80	15.63	R
MW 6932	D 8	24.0	160.0	2.50	332.4	20.95	0.85	0.945	6.299	0.098	13.086	4.71	4.86	R
MW 7232	D 8	24.0	160.0	3.00	267.4	34.71	2.26	0.945	6.299	0.118	10.529	7.80	12.91	S
MW 6936	D 8	24.0	180.0	2.50	382.5	20.95	0.72	0.945	7.087	0.098	15.059	4.71	4.14	S
MW 7236	D 8	24.0	180.0	3.00	306.1	34.71	1.93	0.945	7.087	0.118	12.052	7.80	11.00	T
MW 6940	D 8	24.0	200.0	2.50	432.6	20.95	0.63	0.945	7.874	0.098	17.032	4.71	3.60	T
MW 7240	D 8	24.0	200.0	3.00	344.8	34.71	1.68	0.945	7.874	0.118	13.575	7.80	9.58	U
MW 6944	D 8	24.0	220.0	2.50	482.7	20.95	0.56	0.945	8.661	0.098	19.005	4.71	3.19	U
MW 7244	D 8	24.0	220.0	3.00	383.5	34.71	1.49	0.945	8.661	0.118	15.098	7.80	8.49	U
MW 6948	D 8	24.0	240.0	2.50	532.8	20.95	0.50	0.945	9.449	0.098	20.978	4.71	2.86	V
MW 7248	D 8	24.0	240.0	3.00	422.2	34.71	1.33	0.945	9.449	0.118	16.621	7.80	7.62	V
AX 3724	D 9	25.4	76.2	2.34	133.0	16.46	2.03	1.000	3.000	0.092	5.235	3.70	11.59	L
AX 3824	D 9	25.4	76.2	2.64	118.3	23.22	3.86	1.000	3.000	0.104	4.659	5.22	22.03	M
AX 3924	D 9	25.4	76.2	2.95	108.3	31.43	6.86	1.000	3.000	0.116	4.263	7.07	39.17	M
AX 4024	D 9	25.4	76.2	3.25	101.1	41.16	11.57	1.000	3.000	0.128	3.981	9.25	66.05	N

For Sales or Assistance - Tel 0117 967 3313

All characteristics are nominal

Extension Springs



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						PRICE BAND
		Outside Dia.	Free Lth.	Wire Size	Extended Lth.	Initial Tension	Rate	Outside Dia.	Free Lth.	Wire Size	Extended Lth.	Initial Tension	Rate	
		mm	mm	mm	mm	N	N/mm	inches	inches	inches	inches	Lbs	Lbs/in	
AX 4124	D 9	25.4	76.2	3.66	94.4	56.54	21.73	1.000	3.000	0.144	3.717	12.71	124.06	N
AX 3732	D 9	25.4	101.6	2.34	210.3	16.46	1.06	1.000	4.000	0.092	8.281	3.70	6.05	N
AX 3832	D 9	25.4	101.6	2.64	181.9	23.22	2.02	1.000	4.000	0.104	7.161	5.22	11.56	P
AX 3932	D 9	25.4	101.6	2.95	162.4	31.43	3.62	1.000	4.000	0.116	6.395	7.07	20.66	P
AX 4032	D 9	25.4	101.6	3.25	148.6	41.16	6.13	1.000	4.000	0.128	5.850	9.25	35.01	P
AX 4132	D 9	25.4	101.6	3.66	135.7	56.54	11.59	1.000	4.000	0.144	5.344	12.71	66.19	Q
AX 3740	D 9	25.4	127.0	2.34	287.7	16.46	0.72	1.000	5.000	0.092	11.327	3.70	4.09	Q
AX 3840	D 9	25.4	127.0	2.64	245.5	23.22	1.37	1.000	5.000	0.104	9.664	5.22	7.83	Q
AX 3940	D 9	25.4	127.0	2.95	216.6	31.43	2.46	1.000	5.000	0.116	8.526	7.07	14.03	R
AX 4040	D 9	25.4	127.0	3.25	196.1	41.16	4.17	1.000	5.000	0.128	7.720	9.25	23.82	R
AX 4140	D 9	25.4	127.0	3.66	177.1	56.54	7.91	1.000	5.000	0.144	6.971	12.71	45.14	R
AX 3748	D 9	25.4	152.4	2.34	365.1	16.46	0.54	1.000	6.000	0.092	14.373	3.70	3.09	R
AX 3848	D 9	25.4	152.4	2.64	309.0	23.22	1.04	1.000	6.000	0.104	12.167	5.22	5.92	S
AX 3948	D 9	25.4	152.4	2.95	270.7	31.43	1.86	1.000	6.000	0.116	10.658	7.07	10.62	S
AX 4048	D 9	25.4	152.4	3.25	243.6	41.16	3.16	1.000	6.000	0.128	9.589	9.25	18.05	S
AX 4148	D 9	25.4	152.4	3.66	218.4	56.54	6.00	1.000	6.000	0.144	8.598	12.71	34.25	T
AX 3756	D 9	25.4	177.8	2.34	442.5	16.46	0.44	1.000	7.000	0.092	17.420	3.70	2.49	T
AX 3856	D 9	25.4	177.8	2.64	372.6	23.22	0.83	1.000	7.000	0.104	14.669	5.22	4.76	T
AX 3956	D 9	25.4	177.8	2.95	324.8	31.43	1.50	1.000	7.000	0.116	12.789	7.07	8.54	T
AX 4056	D 9	25.4	177.8	3.25	291.0	41.16	2.54	1.000	7.000	0.128	11.458	9.25	14.53	T
AX 4156	D 9	25.4	177.8	3.66	259.7	56.54	4.83	1.000	7.000	0.144	10.225	12.71	27.59	U
AX 3764	D 9	25.4	203.2	2.34	519.8	16.46	0.36	1.000	8.000	0.092	20.466	3.70	2.08	U
AX 3864	D 9	25.4	203.2	2.64	436.2	23.22	0.70	1.000	8.000	0.104	17.172	5.22	3.98	U
AX 3964	D 9	25.4	203.2	2.95	379.0	31.43	1.25	1.000	8.000	0.116	14.921	7.07	7.15	U
AX 4064	D 9	25.4	203.2	3.25	338.5	41.16	2.13	1.000	8.000	0.128	13.328	9.25	12.16	U
AX 4164	D 9	25.4	203.2	3.66	301.0	56.54	4.05	1.000	8.000	0.144	11.852	12.71	23.10	V
AX 3772	D 9	25.4	228.6	2.34	597.2	16.46	0.31	1.000	9.000	0.092	23.512	3.70	1.78	V
AX 3872	D 9	25.4	228.6	2.64	499.7	23.22	0.60	1.000	9.000	0.104	19.674	5.22	3.42	V
AX 3972	D 9	25.4	228.6	2.95	433.1	31.43	1.08	1.000	9.000	0.116	17.053	7.07	6.14	V
AX 4072	D 9	25.4	228.6	3.25	386.0	41.16	1.83	1.000	9.000	0.128	15.197	9.25	10.45	W
AX 4172	D 9	25.4	228.6	3.66	342.4	56.54	3.48	1.000	9.000	0.144	13.479	12.71	19.87	W
AX 3780	D 9	25.4	254.0	2.34	674.6	16.46	0.27	1.000	10.000	0.092	26.558	3.70	1.56	W
AX 3880	D 9	25.4	254.0	2.64	563.3	23.22	0.53	1.000	10.000	0.104	22.177	5.22	3.00	W
AX 3980	D 9	25.4	254.0	2.95	487.3	31.43	0.94	1.000	10.000	0.116	19.184	7.07	5.39	W
AX 4080	D 9	25.4	254.0	3.25	433.5	41.16	1.61	1.000	10.000	0.128	17.067	9.25	9.17	W
AX 4180	D 9	25.4	254.0	3.66	383.7	56.54	3.05	1.000	10.000	0.144	15.105	12.71	17.43	X
AX 3788	D 9	25.4	279.4	2.34	752.0	16.46	0.24	1.000	11.000	0.092	29.605	3.70	1.39	X
AX 3888	D 9	25.4	279.4	2.64	626.9	23.22	0.47	1.000	11.000	0.104	24.679	5.22	2.67	X
AX 3988	D 9	25.4	279.4	2.95	541.4	31.43	0.84	1.000	11.000	0.116	21.316	7.07	4.79	X
AX 4088	D 9	25.4	279.4	3.25	481.0	41.16	1.43	1.000	11.000	0.128	18.936	9.25	8.16	X
AX 4188	D 9	25.4	279.4	3.66	425.0	56.54	2.72	1.000	11.000	0.144	16.732	12.71	15.52	X
AX 3796	D 9	25.4	304.8	2.34	829.3	16.46	0.22	1.000	12.000	0.092	32.651	3.70	1.25	X
AX 3896	D 9	25.4	304.8	2.64	690.4	23.22	0.42	1.000	12.000	0.104	27.182	5.22	2.41	X
AX 3996	D 9	25.4	304.8	2.95	595.6	31.43	0.76	1.000	12.000	0.116	23.447	7.07	4.32	X
AX 4096	D 9	25.4	304.8	3.25	528.5	41.16	1.29	1.000	12.000	0.128	20.806	9.25	7.36	Y
AX 4196	D 9	25.4	304.8	3.66	466.3	56.54	2.45	1.000	12.000	0.144	18.359	12.71	13.99	Y

Choose from millions of sizes - www.flexosprings.com



Spring Lengths

Compression Lengths



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Coils per cm	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Coils per inch	Rate	
		mm	mm	mm	mm	approx	N/mm/cm	inches	inches	inches	inches	approx	Lb/in/in	
CL 0320	A 3	2.4	1.7	304.8	0.32	11.8	0.96	0.093	0.068	12.0	0.012	30.0	2.16	G
CL 0321	A 3	2.4	1.7	304.8	0.35	12.6	1.37	0.093	0.066	12.0	0.014	32.0	3.07	G
CL 0322	A 3	2.4	1.6	304.8	0.38	12.6	2.01	0.093	0.063	12.0	0.015	32.0	4.51	G
CL 0323	A 3	2.4	1.5	304.8	0.42	13.0	3.12	0.093	0.060	12.0	0.016	33.0	7.01	G
CL 0422	A 6	3.2	2.4	304.8	0.38	8.3	1.09	0.125	0.095	12.0	0.015	21.0	2.45	G
CL 0423	A 6	3.2	2.3	304.8	0.42	8.3	1.72	0.125	0.092	12.0	0.016	21.0	3.87	G
CL 0424	A 6	3.2	2.3	304.8	0.46	8.7	2.49	0.125	0.089	12.0	0.018	22.0	5.60	G
CL 0425	A 6	3.2	2.2	304.8	0.51	8.7	4.02	0.125	0.085	12.0	0.020	22.0	9.03	G
CL 0426	A 6	3.2	2.1	304.8	0.56	8.7	6.23	0.125	0.081	12.0	0.022	22.0	14.01	G
CL 0523	A 8	4.0	3.1	304.8	0.42	7.1	0.94	0.156	0.123	12.0	0.016	18.0	2.12	G
CL 0524	A 8	4.0	3.0	304.8	0.46	7.5	1.34	0.156	0.120	12.0	0.018	19.0	3.02	G
CL 0525	A 8	4.0	2.9	304.8	0.51	7.5	2.14	0.156	0.116	12.0	0.020	19.0	4.81	G
CL 0526	A 8	4.0	2.8	304.8	0.56	7.5	3.28	0.156	0.112	12.0	0.022	19.0	7.37	G
CL 0527	A 8	4.0	2.7	304.8	0.61	7.5	4.86	0.156	0.108	12.0	0.024	19.0	10.92	G
CL 0624	A 9	4.7	3.8	304.8	0.46	5.9	0.93	0.187	0.151	12.0	0.018	15.0	2.08	G
CL 0625	A 9	4.7	3.7	304.8	0.51	5.9	1.46	0.187	0.147	12.0	0.020	15.0	3.29	G
CL 0626	A 9	4.7	3.6	304.8	0.56	6.3	2.08	0.187	0.143	12.0	0.022	16.0	4.69	G
CL 0627	A 9	4.7	3.5	304.8	0.61	6.3	3.06	0.187	0.139	12.0	0.024	16.0	6.88	G
CL 0628	A 9	4.7	3.3	304.8	0.71	6.7	5.75	0.187	0.131	12.0	0.028	17.0	12.93	H
CL 0726	B 2	5.5	4.4	304.8	0.56	5.1	1.53	0.218	0.174	12.0	0.022	13.0	3.44	G
CL 0727	B 2	5.5	4.3	304.8	0.61	5.1	2.24	0.218	0.170	12.0	0.024	13.0	5.03	G
CL 0728	B 2	5.5	4.1	304.8	0.71	5.5	4.09	0.218	0.162	12.0	0.028	14.0	9.20	H
CL 0729	B 2	5.5	3.9	304.8	0.81	5.5	7.44	0.218	0.154	12.0	0.032	14.0	16.73	H
CL 0824	B 4	6.4	5.4	304.8	0.46	4.3	0.49	0.250	0.214	12.0	0.018	11.0	1.10	G
CL 0825	B 4	6.4	5.3	304.8	0.51	4.3	0.76	0.250	0.210	12.0	0.020	11.0	1.72	G
CL 0826	B 4	6.4	5.2	304.8	0.56	4.3	1.15	0.250	0.206	12.0	0.022	11.0	2.58	G
CL 0827	B 4	6.4	5.1	304.8	0.61	4.3	1.67	0.250	0.202	12.0	0.024	11.0	3.76	G
CL 0828	B 4	6.4	4.9	304.8	0.71	4.7	2.99	0.250	0.194	12.0	0.028	12.0	6.73	H
CL 0829	B 4	6.4	4.7	304.8	0.81	4.7	5.39	0.250	0.186	12.0	0.032	12.0	12.13	H
CL 0830	B 4	6.4	4.5	304.8	0.91	4.7	9.13	0.250	0.178	12.0	0.036	12.0	20.53	H
CL 0831	B 4	6.4	4.3	304.8	1.02	4.7	14.73	0.250	0.170	12.0	0.040	12.0	33.12	J
CL 0832	B 4	6.4	3.9	304.8	1.22	5.1	31.68	0.250	0.154	12.0	0.048	13.0	71.23	J
CL 1028	B 7	7.9	6.5	304.8	0.71	3.5	1.91	0.312	0.256	12.0	0.028	9.0	4.29	H
CL 1029	B 7	7.9	6.3	304.8	0.81	3.7	3.22	0.312	0.248	12.0	0.032	9.5	7.23	H
CL 1030	B 7	7.9	6.1	304.8	0.91	3.9	5.11	0.312	0.240	12.0	0.036	10.0	11.49	H
CL 1031	B 7	7.9	5.9	304.8	1.02	3.9	8.14	0.312	0.232	12.0	0.040	10.0	18.29	J
CL 1032	B 7	7.9	5.5	304.8	1.22	3.9	18.45	0.312	0.216	12.0	0.048	10.0	41.48	J
CL 1230	C 1	9.5	7.7	304.8	0.91	3.0	3.68	0.375	0.303	12.0	0.036	7.5	8.26	H
CL 1231	C 1	9.5	7.5	304.8	1.02	3.1	5.44	0.375	0.295	12.0	0.040	8.0	12.24	J
CL 1232	C 1	9.5	7.1	304.8	1.22	3.1	12.14	0.375	0.279	12.0	0.048	8.0	27.28	J
CL 1233	C 1	9.5	6.7	304.8	1.42	3.3	22.79	0.375	0.263	12.0	0.056	8.5	51.24	K
CL 1234	C 1	9.5	6.3	304.8	1.63	3.5	39.63	0.375	0.247	12.0	0.064	9.0	89.10	M
CL 1431	C 3	11.1	9.1	304.8	1.02	2.6	4.03	0.437	0.357	12.0	0.040	6.5	9.05	J
CL 1432	C 3	11.1	8.7	304.8	1.22	2.8	8.24	0.437	0.341	12.0	0.048	7.0	18.52	J
CL 1433	C 3	11.1	8.3	304.8	1.42	2.8	16.25	0.437	0.325	12.0	0.056	7.0	36.52	K
CL 1434	C 3	11.1	7.8	304.8	1.63	3.0	27.57	0.437	0.309	12.0	0.064	7.5	61.98	M
CL 1435	C 3	11.1	7.4	304.8	1.83	3.0	47.12	0.437	0.293	12.0	0.072	7.5	105.94	M

Choose from millions of sizes - www.flexosprings.com

Compression Lengths



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Coils per cm	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Coils per inch	Rate	
		mm	mm	mm	mm	approx	N/mm/cm	inches	inches	inches	inches	approx	lb/in/in	
CL 1632	C 5	12.7	10.3	304.8	1.22	2.2	6.68	0.500	0.404	12.0	0.048	5.5	15.03	J
CL 1633	C 5	12.7	9.9	304.8	1.42	2.4	11.98	0.500	0.388	12.0	0.056	6.0	26.92	K
CL 1634	C 5	12.7	9.4	304.8	1.63	2.4	21.58	0.500	0.372	12.0	0.064	6.0	48.51	M
CL 1635	C 5	12.7	9.0	304.8	1.83	2.6	33.72	0.500	0.356	12.0	0.072	6.5	75.82	M
CL 1636	C 5	12.7	8.6	304.8	2.03	2.6	54.39	0.500	0.340	12.0	0.080	6.5	122.29	N
CL 1834	C 7	14.3	11.0	304.8	1.63	2.1	16.55	0.562	0.434	12.0	0.064	5.3	37.20	M
CL 1835	C 7	14.3	10.6	304.8	1.83	2.1	27.82	0.562	0.418	12.0	0.072	5.3	62.56	M
CL 1836	C 7	14.3	10.2	304.8	2.03	2.2	42.53	0.562	0.402	12.0	0.080	5.5	95.62	N
CL 2033	C 9	15.9	13.0	304.8	1.42	1.8	7.59	0.625	0.513	12.0	0.056	4.5	17.06	K
CL 2034	C 9	15.9	12.6	304.8	1.63	1.8	13.50	0.625	0.497	12.0	0.064	4.5	30.36	M
CL 2035	C 9	15.9	12.2	304.8	1.83	2.0	20.33	0.625	0.481	12.0	0.072	5.0	45.70	M
CL 2036	C 9	15.9	11.8	304.8	2.03	2.0	32.36	0.625	0.465	12.0	0.080	5.0	72.76	N
CL 2037	C 9	15.9	11.2	304.8	2.34	2.0	60.51	0.625	0.441	12.0	0.092	5.0	136.05	P
CL 2234	D 2	17.4	14.2	304.8	1.63	1.6	11.09	0.687	0.559	12.0	0.064	4.0	24.94	M
CL 2235	D 2	17.4	13.8	304.8	1.83	1.8	16.42	0.687	0.543	12.0	0.072	4.5	36.91	M
CL 2236	D 2	17.4	13.4	304.8	2.03	1.8	26.03	0.687	0.527	12.0	0.080	4.5	58.51	N
CL 2237	D 2	17.4	12.8	304.8	2.34	1.8	48.33	0.687	0.503	12.0	0.092	4.5	108.66	P
CL 2435	D 4	19.1	15.4	304.8	1.83	1.6	13.79	0.750	0.606	12.0	0.072	4.0	30.99	M
CL 2436	D 4	19.1	15.0	304.8	2.03	1.6	21.77	0.750	0.590	12.0	0.080	4.0	48.95	N
CL 2437	D 4	19.1	14.4	304.8	2.34	1.6	40.20	0.750	0.566	12.0	0.092	4.0	90.39	P
CL 2438	D 4	19.1	13.8	304.8	2.64	1.7	65.30	0.750	0.542	12.0	0.104	4.3	146.80	Q
CL 2439	D 4	19.1	13.2	304.8	2.95	1.7	106.91	0.750	0.518	12.0	0.116	4.3	240.36	R
CL 2440	D 4	19.1	12.5	304.8	3.25	1.7	167.85	0.750	0.494	12.0	0.128	4.3	377.37	S
CL 2837	D 7	22.2	17.6	304.8	2.34	1.3	29.37	0.875	0.691	12.0	0.092	3.3	66.02	P
CL 2838	D 7	22.2	16.9	304.8	2.64	1.4	46.64	0.875	0.667	12.0	0.104	3.5	104.85	Q
CL 2839	D 7	22.2	16.3	304.8	2.95	1.4	75.66	0.875	0.643	12.0	0.116	3.5	170.11	R
CL 2840	D 7	22.2	15.7	304.8	3.25	1.4	117.67	0.875	0.619	12.0	0.128	3.5	264.54	S
CL 3237	D 9	25.4	20.7	304.8	2.34	1.2	20.40	1.000	0.816	12.0	0.092	3.0	45.86	P
CL 3238	D 9	25.4	20.1	304.8	2.64	1.2	34.67	1.000	0.792	12.0	0.104	3.0	77.94	Q
CL 3239	D 9	25.4	19.5	304.8	2.95	1.3	51.58	1.000	0.768	12.0	0.116	3.3	115.95	R
CL 3240	D 9	25.4	18.9	304.8	3.25	1.3	79.66	1.000	0.744	12.0	0.128	3.3	179.10	S

For Sales or Assistance - Tel 0117 967 3313

All characteristics are nominal

Tension Lengths



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Coils per cm	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Coils per inch	Rate	
		mm	mm	mm	mm	approx	N/mm/cm	inches	inches	inches	inches	approx	lb/in/in	
LB 20	A 3	2.4	1.8	304.8	0.32	31.8	0.35	0.094	0.069	12.0	0.012	80.6	0.78	M
LB 21	A 3	2.4	1.7	304.8	0.35	28.9	0.57	0.094	0.067	12.0	0.014	73.5	1.29	M
LB 22	A 3	2.4	1.6	304.8	0.38	26.6	0.92	0.094	0.064	12.0	0.015	67.6	2.06	M
LB 23	A 3	2.4	1.6	304.8	0.42	24.0	1.63	0.094	0.061	12.0	0.016	61.0	3.66	M
LD 21	A 6	3.2	2.5	304.8	0.35	28.9	0.22	0.125	0.098	12.0	0.014	73.5	0.48	N
LD 22	A 6	3.2	2.4	304.8	0.38	26.6	0.34	0.125	0.095	12.0	0.015	67.6	0.76	N
LD 23	A 6	3.2	2.3	304.8	0.42	24.0	0.59	0.125	0.092	12.0	0.016	61.0	1.33	N
LD 24	A 6	3.2	2.3	304.8	0.46	21.9	0.99	0.125	0.089	12.0	0.018	55.6	2.22	N
LD 25	A 6	3.2	2.2	304.8	0.51	19.7	1.77	0.125	0.085	12.0	0.020	50.0	3.98	N
LD 26	A 6	3.2	2.1	304.8	0.56	17.9	3.02	0.125	0.081	12.0	0.022	45.5	6.79	N
LE 22	A 8	4.0	3.2	304.8	0.38	26.6	0.16	0.156	0.126	12.0	0.015	67.6	0.36	P
LE 23	A 8	4.0	3.1	304.8	0.42	24.0	0.28	0.156	0.123	12.0	0.016	61.0	0.63	P
LE 24	A 8	4.0	3.0	304.8	0.46	21.9	0.46	0.156	0.120	12.0	0.018	55.6	1.04	P
LE 25	A 8	4.0	2.9	304.8	0.51	19.7	0.81	0.156	0.116	12.0	0.020	50.0	1.83	P
LE 26	A 8	4.0	2.8	304.8	0.56	17.9	1.37	0.156	0.112	12.0	0.022	45.5	3.09	P
LE 27	A 8	4.0	2.7	304.8	0.61	16.4	2.22	0.156	0.108	12.0	0.024	41.7	4.99	P
LF 23	A 9	4.7	3.9	304.8	0.42	24.0	0.15	0.187	0.154	12.0	0.016	61.0	0.34	Q
LF 24	A 9	4.7	3.8	304.8	0.46	21.9	0.25	0.187	0.151	12.0	0.018	55.6	0.56	Q
LF 25	A 9	4.7	3.7	304.8	0.51	19.7	0.44	0.187	0.147	12.0	0.020	50.0	0.99	Q
LF 26	A 9	4.7	3.6	304.8	0.56	17.9	0.74	0.187	0.143	12.0	0.022	45.5	1.65	Q
LF 27	A 9	4.7	3.5	304.8	0.61	16.4	1.18	0.187	0.139	12.0	0.024	41.7	2.65	Q
LF 28	A 9	4.7	3.3	304.8	0.71	14.1	2.74	0.187	0.131	12.0	0.028	35.7	6.17	Q
LH 25	B 4	6.4	5.3	304.8	0.51	19.7	0.17	0.250	0.210	12.0	0.020	50.0	0.38	R
LH 26	B 4	6.4	5.2	304.8	0.56	17.9	0.28	0.250	0.206	12.0	0.022	45.5	0.63	R
LH 27	B 4	6.4	5.1	304.8	0.61	16.4	0.44	0.250	0.202	12.0	0.024	41.7	0.99	R
LH 28	B 4	6.4	4.9	304.8	0.71	14.1	1.01	0.250	0.194	12.0	0.028	35.7	2.27	R
LH 29	B 4	6.4	4.7	304.8	0.81	12.3	2.08	0.250	0.186	12.0	0.032	31.3	4.67	R
LH 30	B 4	6.4	4.5	304.8	0.91	10.9	3.96	0.250	0.178	12.0	0.036	27.8	8.90	R
LH 31	B 4	6.4	4.3	304.8	1.02	9.8	7.09	0.250	0.170	12.0	0.040	25.0	15.95	R
LK 28	B 7	7.9	6.5	304.8	0.71	14.1	0.48	0.312	0.256	12.0	0.028	35.7	1.08	R
LK 29	B 7	7.9	6.3	304.8	0.81	12.3	0.98	0.312	0.248	12.0	0.032	31.3	2.20	R
LK 30	B 7	7.9	6.1	304.8	0.91	10.9	1.84	0.312	0.240	12.0	0.036	27.8	4.15	R
LK 31	B 7	7.9	5.9	304.8	1.02	9.8	3.27	0.312	0.232	12.0	0.040	25.0	7.34	R
LK 32	B 7	7.9	5.5	304.8	1.22	8.2	8.89	0.312	0.216	12.0	0.048	20.8	19.99	R
LK 33	B 7	7.9	5.1	304.8	1.42	7.0	21.09	0.312	0.200	12.0	0.056	17.9	47.42	R
LK 34	B 7	7.9	4.7	304.8	1.63	6.2	45.26	0.312	0.184	12.0	0.064	15.6	101.75	R
LM 30	C 1	9.5	7.7	304.8	0.91	10.9	1.00	0.375	0.303	12.0	0.036	27.8	2.24	S
LM 31	C 1	9.5	7.5	304.8	1.02	9.8	1.75	0.375	0.295	12.0	0.040	25.0	3.93	S
LM 32	C 1	9.5	7.1	304.8	1.22	8.2	4.68	0.375	0.279	12.0	0.048	20.8	10.52	S
LM 33	C 1	9.5	6.7	304.8	1.42	7.0	10.90	0.375	0.263	12.0	0.056	17.9	24.51	S
LM 34	C 1	9.5	6.3	304.8	1.63	6.2	22.95	0.375	0.247	12.0	0.064	15.6	51.60	S
LN 30	C 3	11.1	9.3	304.8	0.91	10.9	0.60	0.437	0.365	12.0	0.036	27.8	1.35	S
LN 31	C 3	11.1	9.1	304.8	1.02	9.8	1.05	0.437	0.357	12.0	0.040	25.0	2.36	S
LN 32	C 3	11.1	8.7	304.8	1.22	8.2	2.78	0.437	0.341	12.0	0.048	20.8	6.25	S
LN 33	C 3	11.1	8.3	304.8	1.42	7.0	6.40	0.437	0.325	12.0	0.056	17.9	14.38	S
LN 34	C 3	11.1	7.8	304.8	1.63	6.2	13.30	0.437	0.309	12.0	0.064	15.6	29.91	S
LN 35	C 3	11.1	7.4	304.8	1.83	5.5	25.60	0.437	0.293	12.0	0.072	13.9	57.56	S

Choose from millions of sizes - www.flexosprings.com

Tension Lengths



FLEXO STOCK NUMBER	Range	METRIC UNITS						IMPERIAL UNITS						PRICE BAND
		Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Coils per cm	Rate	Outside Dia.	Inside Dia.	Free Lth.	Wire Size	Coils per inch	Rate	
		mm	mm	mm	mm	approx. N/mm/cm		inches	inches	inches	inches	approx. lb/in/in		
LP 32	C 5	12.7	10.3	304.8	1.22	8.2	1.77	0.500	0.404	12.0	0.048	20.8	3.98	T
LP 33	C 5	12.7	9.9	304.8	1.42	7.0	4.04	0.500	0.388	12.0	0.056	17.9	9.09	T
LP 34	C 5	12.7	9.4	304.8	1.63	6.2	8.33	0.500	0.372	12.0	0.064	15.6	18.73	T
LP 35	C 5	12.7	9.0	304.8	1.83	5.5	15.88	0.500	0.356	12.0	0.072	13.9	35.70	T
LP 36	C 5	12.7	8.6	304.8	2.03	4.9	28.47	0.500	0.340	12.0	0.080	12.5	64.02	T
LQ 33	C 7	14.3	11.4	304.8	1.42	7.0	2.73	0.562	0.450	12.0	0.056	17.9	6.14	U
LQ 34	C 7	14.3	11.0	304.8	1.63	6.2	5.59	0.562	0.434	12.0	0.064	15.6	12.57	U
LQ 35	C 7	14.3	10.6	304.8	1.83	5.5	10.58	0.562	0.418	12.0	0.072	13.9	23.79	U
LQ 36	C 7	14.3	10.2	304.8	2.03	4.9	18.84	0.562	0.402	12.0	0.080	12.5	42.35	U
LR 34	C 9	15.9	12.6	304.8	1.63	6.2	3.91	0.625	0.497	12.0	0.064	15.6	8.79	U
LR 35	C 9	15.9	12.2	304.8	1.83	5.5	7.36	0.625	0.481	12.0	0.072	13.9	16.55	U
LR 36	C 9	15.9	11.8	304.8	2.03	4.9	13.03	0.625	0.465	12.0	0.080	12.5	29.30	U
LR 37	C 9	15.9	11.2	304.8	2.34	4.3	28.05	0.625	0.441	12.0	0.092	10.9	63.06	U
LS 35	D 2	17.4	13.8	304.8	1.83	5.5	5.35	0.687	0.543	12.0	0.072	13.9	12.03	V
LS 36	D 2	17.4	13.4	304.8	2.03	4.9	9.43	0.687	0.527	12.0	0.080	12.5	21.21	V
LS 37	D 2	17.4	12.8	304.8	2.34	4.3	20.16	0.687	0.503	12.0	0.092	10.9	45.33	V
LT 35	D 4	19.1	15.4	304.8	1.83	5.5	3.99	0.750	0.606	12.0	0.072	13.9	8.98	W
LT 36	D 4	19.1	15.0	304.8	2.03	4.9	7.01	0.750	0.590	12.0	0.080	12.5	15.77	W
LT 37	D 4	19.1	14.4	304.8	2.34	4.3	14.91	0.750	0.566	12.0	0.092	10.9	33.52	W
LT 38	D 4	19.1	13.8	304.8	2.64	3.8	29.11	0.750	0.542	12.0	0.104	9.6	65.45	W
LT 39	D 4	19.1	13.2	304.8	2.95	3.4	53.22	0.750	0.518	12.0	0.116	8.6	119.65	X
LV 37	D 7	22.2	17.6	304.8	2.34	4.3	8.85	0.875	0.691	12.0	0.092	10.9	19.89	X
LV 38	D 7	22.2	16.9	304.8	2.64	3.8	17.13	0.875	0.667	12.0	0.104	9.6	38.50	X
LV 39	D 7	22.2	16.3	304.8	2.95	3.4	31.02	0.875	0.643	12.0	0.116	8.6	69.74	Y
LV 40	D 7	22.2	15.7	304.8	3.25	3.1	53.28	0.875	0.619	12.0	0.128	7.8	119.79	Y
LX 37	D 9	25.4	20.7	304.8	2.34	4.3	5.67	1.000	0.816	12.0	0.092	10.9	12.76	Y
LX 38	D 9	25.4	20.1	304.8	2.64	3.8	10.91	1.000	0.792	12.0	0.104	9.6	24.53	Y
LX 39	D 9	25.4	19.5	304.8	2.95	3.4	19.63	1.000	0.768	12.0	0.116	8.6	44.14	Z
LX 40	D 9	25.4	18.9	304.8	3.25	3.1	33.50	1.000	0.744	12.0	0.128	7.8	75.31	Z
LX 41	D 9	25.4	18.1	304.8	3.66	2.7	63.90	1.000	0.712	12.0	0.144	6.9	143.65	Z

For Sales or Assistance - Tel 0117 967 3313

All characteristics are nominal

Boxes of Assorted Springs

Each assortment contains a variety of springs,
all of which are available individually
from our standard catalogue range.

COMPRESSION SPRINGS

BOX SET		METRIC UNITS (mm)			IMPERIAL UNITS (inches)			QUANTITIES
		Outside Diameter	Free Length	Wire Size	Outside Diameter	Free Length	Wire Size	
FB C1	from to	3 10	6.4 50.8	0.35 1.63	0.1 0.4	0.25 2.00	0.014 0.064	96 Springs (24 sizes)
FB C2	from to	7 15	12.7 101.6	0.71 2.64	0.3 0.6	0.50 4.00	0.028 0.104	72 Springs (24 sizes)
FB C3	from to	11 20	19.1 152.4	0.91 3.25	0.4 0.8	0.75 6.00	0.036 0.128	48 Springs (24 sizes)

EXTENSION SPRINGS

BOX SET		METRIC UNITS (mm)			IMPERIAL UNITS (inches)			QUANTITIES
		Outside Diameter	Free Length	Wire Size	Outside Diameter	Free Length	Wire Size	
FB X1	from to	3 10	12.7 127.0	0.35 1.42	0.1 0.4	0.50 5.00	0.014 0.056	96 Springs (24 sizes)
FB X2	from to	7 15	25.4 152.4	0.71 2.03	0.3 0.6	1.00 6.00	0.028 0.080	72 Springs (24 sizes)
FB X3	from to	11 20	38.1 203.2	1.02 2.95	0.4 0.8	1.50 8.00	0.040 0.116	48 Springs (24 sizes)

Parameters are given for general guidance only

Conversion Tables

STANDARD WIRE GAUGES

GAUGE	METRIC mm	IMPERIAL inches	GAUGE	METRIC mm	IMPERIAL inches
33	0.254	0.0100	-	1.500	0.0591
32	0.274	0.0108	16	1.625	0.0640
31	0.295	0.0116	-	1.700	0.0669
30	0.315	0.0124	15	1.828	0.0720
29	0.345	0.0136	-	1.900	0.0748
28	0.376	0.0148	14	2.032	0.0800
-	0.400	0.0157	-	2.120	0.0835
27	0.417	0.0164	-	2.240	0.0882
26	0.457	0.0180	13	2.336	0.0920
25	0.508	0.0200	-	2.500	0.0984
24	0.559	0.0220	12	2.642	0.1040
23	0.610	0.0240	-	2.800	0.1102
-	0.670	0.0264	11	2.946	0.1160
22	0.711	0.0280	10	3.251	0.1280
-	0.750	0.0295	9	3.657	0.1440
21	0.813	0.0320	8	4.064	0.1600
-	0.850	0.0335	7	4.470	0.1760
20	0.914	0.0360	6	4.877	0.1920
-	0.950	0.0374	5	5.385	0.2120
19	1.016	0.0400	4	5.893	0.2320
-	1.120	0.0441	3	6.401	0.2520
18	1.219	0.0480	2	7.010	0.2760
-	1.320	0.0520	1	7.620	0.3000
17	1.422	0.0560	0	8.230	0.3240

CONVERSION FACTORS

METRIC TO IMPERIAL			IMPERIAL TO METRIC		
1 Millimetre	=	0.0394 Inches	1 Inch	=	25.4 Millimetres
1 Metre	=	3.2808 Feet	1 Foot	=	0.3048 Metres
1 Gram	=	0.0353 Ounces	1 Ounce	=	28.35 Grams
1 Kilogram	=	2.2046 Pounds	1 Pound	=	0.4536 Kilograms
1 N/mm	=	5.71 Lbs/Inch	1 Lb/Inch	=	0.175 N/mm
1 Kilogram	=	9.806 Newtons	1 Pound	=	4.448 Newtons



FLEXO SPRINGS LTD
Hill Street
Kingswood
Bristol BS15 4HB
Tel 0117 967 3313
Fax 0117 935 2597

www.flexosprings.com - sales@flexosprings.com