

Vibro-S

Vibro S stands out as a superior machinery mounting solution, engineered for high performance. Designed to meet the demands of modern manufacturing settings characterized by rapid changes, it offers unparalleled ease in machine installation and facilitates flexible plant layouts.




Vibro S is crafted from a precise blend of meticulously chosen cork particles combined with polychloroprene elastomers.

Advantages:

- Rapid Installation.
- Flexibility in Machinery Layout.
- Vibration Control.
- Long Lifespan.
- Reduces transmitted noise.
- Max Stress Tolerance: 0.5 MN/m².

Applications

- HVAC ventilation equipment- AHU, CHRV, Chillers.
- Industrial Machinery- Saws, Lathes, Drills, Guillotines, Presses, etc.
- Power Generation Systems (Gen Sets).
- Pumps and Compressors.

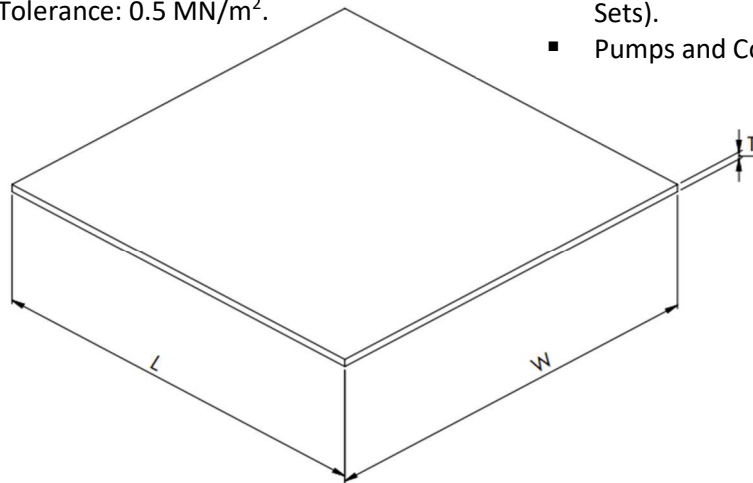

Available in Standard Lengths of 1000mm and 1200mm.

Standard Thickness (mm)	
6	Standard Width (mm): 25, 50, 75, 100, 125, 150, 300, 1000
10	
12	
20	
25	

Technical Data	
Tensile Strength	2.37 MN/m ² 240,000 Kgf/m ²
Hardness	69 ± 5° Shore A
Damping Factor	0.1
Temperature Range	-40° to 100°C
Maximum Load Bearing Capacity	0.5 MN/m ² 50,000 Kgf/m ²

Max compression load in Kg deflection in mm.

This information is for guidance only. Customers are recommended to contact us for further technical information on products and applications. We reserve the right to alter specifications or withdraw products without notice.